

Case No. 11-4394-EL-REN
Snyder, Laurie Residence – L. Snyder
Staff Interrogatories – Initial Set

Question 1:

Ohio Administrative Code rule 4901: 1-40-04 (D)(1) states that “to be eligible for use towards satisfying a benchmark, a REC must originate from a facility that meets the definition of a renewable energy resource, including solar energy resources, and be measured by a utility-grade meter in compliance with paragraph B of rule 4901:1-10-05 of the Administrative Code, for facilities with generating capacity of more than six kilowatts.”

Ohio Adm. Code rule 4901:1-10-05 (B) and (F) is paraphrased as follows, utility-grade meter device accuracy needs to comply with the 2001 American National Standards Institute (ANSI) C 12.1 standards.

Please submit additional documentation that the Sangamo meter, model J4S, indicated in section ‘N’ is a utility-grade meter. Or that meter Serial No. 48-730-842 is a utility-grade meter and as such complies with the ANSI C 12.1 standards.

Answer 1:

Attached is the product spec sheet for the meter in question. It confirms that all units provided by Hialeah Meter are calibrated to ANSI C 12.1 standards. Also attached is the sales receipt for the meter which includes the Serial No. of the meter.

⚠ DANGER
Hazardous Voltage.
Will cause death, serious
injury or substantial
property damage.
Turn off power supplying this
equipment before working inside.



⚠ PELIGRO
Voltaje peligroso. Causará la
muerte, lesiones graves o daño
substantial a la propiedad.
Desconecte el suministro de
energía a este equipo antes de
trabajar en su interior.






450 WEST 28TH STREET • P.O. BOX 1047 • HIALEAH, FLORIDA 33011
 PHONE (305) 887-8931 • FAX (305) 887-6542 • (800) 654-0821
 www.hialeahmeter.com

PRODUCT LIST S-2S

REMANUFACTURED SINGLE PHASE WATTHOUR METERS WEATHERPROOF SOCKET TYPE




FORM 2S
 for 3 wire
 circuits

OK for 120 volt,
 2 wire circuits, too!
 Ask for diagram R-2S-2
 Except in California



TYPICAL METER WITH EZ READ DIAL.
 Add E to catalog number below.

MATCHING
 SOCKET AVAILABLE

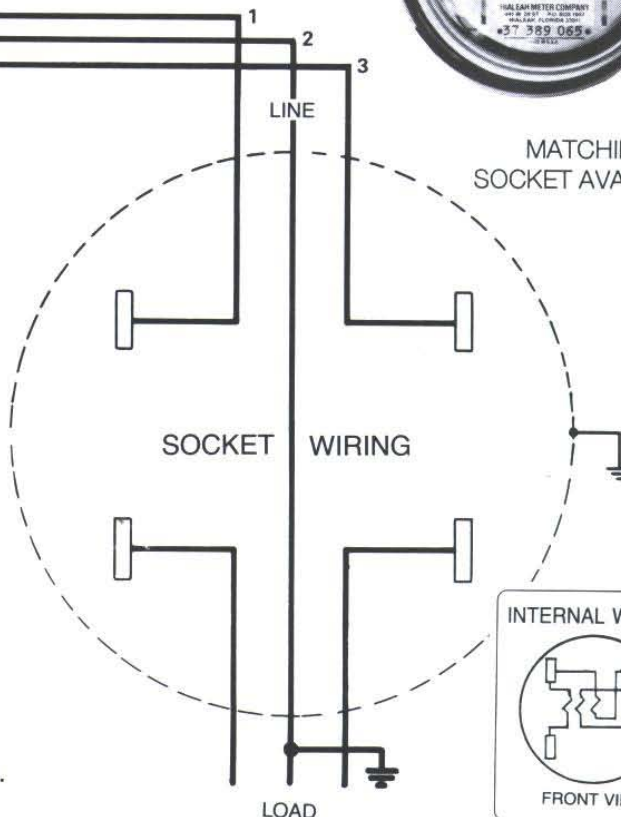

GUARANTEED TWO FULL YEARS

Calibrated within 1% (one percent) accuracy at full load and light load. Like new appearance. All are major U. S. brands conforming to ANSI C12 standards.

DIAMETER ALL MODELS 7"					DEPTH TO FRONT OF GLASS (SOCKET NOT INCLUDED)	
CLASS (CL) Ampacity	AMP-TA	VOLT	WIRE	TERMINALS	4 ³ / ₄ "	3 ⁵ / ₈ "
100	15	240	3	4	S-2S-MA1523	S-2S-SA1523
200	30	240	3	4	S-2S-MC3023	S-2S-SC3023
200	30	480	3	4	—	S-2S-SC3043
320	50	240	3	4	S-2S-MD5023	S-2S-SD5023
APPROXIMATE NET WEIGHT					6 LBS.	5 LBS.

Protect meter accuracy with inexpensive padlock type seal. Plastic body-steel hasp. Cat. #4-MA-PLSL

Hickory Ridge Solar

467 Dale Road
Barto, PA 19504
Phone 610-845-9360
Fax 610-845-9361
www.hickoryridgesolar.com



Invoice

Date	Invoice #
2/11/2011	2257

Bill To
Fortney Construction 711 Pine Hill Road Hummelstown, PA 17036

Due Date	Terms	Project
3/13/2011	Net 30	Fortney Shop

Item	Description	Quantity	U/M	Rate	Amount
PV-R...	Fortney Shop Pole Mount Racking for PV System. (Does not include poles)	1		2,840.00	2,840.00
Utility	Utility grade refurbished meter, form S-2S SN 48-730-842 (calibrated to ANSI C 12.1 standards from Hialeah Meter Co, product listing S-2S)	1	ea	27.70	27.70
				6.00%	172.06

				Total	\$3,039.76

This foregoing document was electronically filed with the Public Utilities

Commission of Ohio Docketing Information System on

10/11/2011 3:00:01 PM

in

Case No(s). 11-4394-EL-REN

Summary: Response Snyder, Laurie Residence – L. Snyder
Staff Interrogatories – Initial Set
electronically filed by Mr. Brad Bowery on behalf of Ms. Laurie Snyder