

TRANSPORTATION STUDY

FOR THE:

PROPOSED REPUBLIC WIND PROJECT OPSB SUBMITTAL SANDUSKY AND SENECA COUNTIES, OHIO

PREPARED FOR:

APEX CLEAN ENERGY, INC. 310 4TH STREET NE, SUITE 200 CHARLOTTESVILLE, VA 22902

PREPARED BY:

HULL & ASSOCIATES, INC. 6397 EMERALD PARKWAY, SUITE 200 DUBLIN, OHIO 43016

SUBMITTAL DATE: MAY 2016
REVISION 3.0: DECEMBER 2017



TABLE OF CONTENTS

	INTRO	DDUCTION AND EVALUATION CRITERIA	1
	1.1	Project Description and Purpose	
	1.2	Methodology	
	1.3	Vehicle Types	
		1.3.1 Wind Turbine Equipment	2
		1.3.2 Construction Equipment and Materials	
	1.4	Design Vehicle Characteristics	3
	PROB	ABLE ROUTE EVALUATION	5
	2.1	Probable Routes	5
	2.2	Constraints and Conceptual Improvements	5
	2.3	Loads and Permits	6
	2.4	Conclusions for Secondary Roads	
	PRELI	MINARY ASSESSMENT OF TERTIARY ROADS	8
	3.1	Visual Observation Results	8
	POTE	NTIAL IMPACTS TO ROADWAYS	9
	4.7		•
	<u>4.1</u>	Construction Traffic	9
		4.1.1 Maintenance of Traffic (MOT)	10
	4.2	Proposed Mitigation	10
		4.2.1 Insufficient Roadway Width	10
		4.2.2 Insufficient Vertical Clearance	
		4.2.3 Insufficient Cover over Drainage Structures	
		4.2.4 Poor Structure Condition	
		4.2.5 Inadequate Bridge Capacity4.2.6 Insufficient Roadway Geometry	
		, , , , , , , , , , , , , , , , , , , ,	
	CONC	SHICIONS	12
	CONC	CULSIONS	13
	CONC	LIST OF TABLES	13
le 1		LIST OF TABLES	13
	I	LIST OF TABLES Design Vehicle Characteristics	13
le 2	I 2A	LIST OF TABLES Design Vehicle Characteristics Secondary Road Characteristics — Preferred Route	13
ole 1 ole 2 ole 3	I 2A 2B	LIST OF TABLES Design Vehicle Characteristics Secondary Road Characteristics — Preferred Route Secondary Road Characteristics — Alternative Route	13
le 2	I 2A 2B 3A	LIST OF TABLES Design Vehicle Characteristics Secondary Road Characteristics — Preferred Route	13

i

TABLE OF CONTENTS

(cont.)

LIST OF APPENDICES

Appendix A Truck Profiles

Appendix B ODOT Special Hauling Permit Fees & Special Hauling Permit Application

LIST OF FIGURES

Figure 1 Potential Routes Overview
Figure 2 Potential Routes (Project Area)

Figures 3-28 Turning Movements

1.0 INTRODUCTION AND EVALUATION CRITERIA

1.1 Project Description and Purpose

Apex Clean Energy, Inc. (Apex) is planning development of a wind-powered electric generating facility in northeast Ohio referred to as the Republic Wind project. As part of the project development, an application for a Certification of Compatibility and Public Need from the Ohio Power Siting Board (OPSB) will be prepared and this study will support that application. This study focuses on serving the public's interest, convenience and necessity as it relates to the roadway infrastructure necessary to construct the proposed project. The purpose of this study is to:

- 1. Identify a Preferred and Alternate delivery route to the project area; and
- Evaluate the existing characteristics of the roadways and describe the anticipated impacts
 associated with construction vehicles and equipment delivery. Measures to improve
 existing roads and repair roads and bridges to at least the condition prior to construction
 will be discussed.

The Republic Wind project will include up to 58 wind turbines, along with associated infrastructure such as an operations and maintenance building, access roads, electrical collection lines, substation(s), construction staging areas, and meteorological towers. It is located in Sandusky County within the township of York, and in Seneca County within the townships of Pleasant, Adams, Thompson, Scipio, and Reed (hereafter referred to as the Project Area).

The turbines will be located at various locations across the Project Area, and access to the proposed turbine sites for construction and operation will be from county and township roads and, where necessary, new gravel access roads. Construction of the project will cause temporary increases in truck traffic on area roadways due to the delivery of materials and equipment.

1.2 Methodology

This evaluation will identify and analyze one (1) Preferred Route and one (1) Alternate Route for construction traffic. The evaluation identifies three Road Types:

- 1. Primary Roads Interstate and 4-lane divided State highways;
- 2. Secondary Roads 2-lane State highways; and
- 3. Tertiary Roads 1 or 2-lane county and township roads.

The evaluation is based on Interstate-80/90 (Ohio Turnpike) being used as the Primary Road to the Project Area. Therefore, the evaluation of the Preferred and Alternate Routes will originate at interchanges from this roadway (see Figure 1). According to the road type definitions above, the Preferred Route includes another Primary Road, U.S. Route 20, but for the sake of clarity, it will be considered a Secondary Road for the remainder of this report. The Secondary Roads will be Ohio Department of Transportation (ODOT) roadways leading from intersections with the Primary Road, Interstate- 80/90, to the Project Area. The Tertiary Roads will be township and county roadways originating from the Secondary Roads to the proposed turbine access roads

This evaluation includes a desktop study and on-site visual assessment of the probable Primary and Secondary Roads and documentation of roadway limitations for load, pavement width, pavement condition, height, grades, intersection radii, and sharp curve radii. The evaluation identifies locations where improvements to the road are likely needed to accommodate the size of the delivery and construction vehicles, and figures are included that graphically show these conceptual improvements. Research for state permits that are necessary for hauling the materials and equipment is also included in the evaluation. An on-site visual assessment of the Tertiary Roads was also conducted.

A more detailed Transportation Routing Plan will be provided at a later date by the selected transportation company. The follow-up study may include surveys to identify roadway constraints such as horizontal and vertical alignments and overhead utilities. The follow-up study will identify necessary upgrades to roadways and intersections so that engineered construction plans can be prepared. In addition, the follow-up study will include a pre- and post-construction roadway survey so that the condition of the roadway infrastructure affected by the development is in the same or better condition as it was prior to construction.

1.3 Vehicle Types

The size and types of vehicles needed to deliver the turbine equipment depend on the specific project and the model and manufacturer of the turbine being hauled. Turbine components can be classified as follows:

1.3.1 Wind Turbine Equipment

- Blade Sections Blades are transported on trailers with one to three blades per vehicle.
 Blades typically control the length of the design vehicle, and the radii of the curves along the travel route to the site. Specialized transport vehicles are designed with articulating (manual or self-steering) rear axles to allow maneuverability through curves.
- Tower Sections Towers are typically transported in as many as four sections depending on the supplier. Towers generally do not control design vehicle length but may control design vehicle height and/or width.

- Nacelle and Hub The turbine nacelle, hub, and related elements are typically the heaviest components transported. Generally, the nacelle and hub are transported separately, and the nacelle is the heaviest component.
- Escort Vehicles Light trucks with signs and banners that travel immediately in front or behind oversized loads to provide warning to motorists of the oversized vehicle.

1.3.2 Construction Equipment and Materials

- Construction of Site Access Roads Conventional trucks carrying stone, gravel and miscellaneous construction equipment.
- Crane For assembly of the wind turbine towers, cranes are transported in sections over numerous trips to the site.
- Concrete trucks for tower foundations.
- Vehicles transporting construction staff and other incidental truck trips.

1.4 Design Vehicle Characteristics

Transportation of turbine components and associated construction material involves numerous conventional and specialized transportation vehicles. Wind turbine components (such as the tower sections, blade, and nacelle) are transported separately. The actual dimensions and specifications of the design vehicles may vary, depending on the specific wind turbine supplier and components.

At the time of this study, a turbine model had not been selected by Apex. Apex shared a variety of wind turbine generator (WTG) vendor information. Based on this information and previous experience with these types of projects, Apex asked Hull to make assumptions for the design vehicle characteristics for this study. These assumptions are shown in Table 1. Once a WTG has been selected for this project, the assumptions shown in Table 1 below will be re-evaluated based on actual expected vehicle characteristics.

A 180-foot (55-m) blade is to be used for the purpose of this route evaluation. Therefore, a worst-case design vehicle was used for the evaluation which has a 180-foot trailer component and total length of 210 feet. For purposes of this study, blade delivery trucks were assumed to have rear-steering capabilities.

Approximate vehicle dimensions for other construction components are also listed in Table 1. An experienced transportation provider will be used for the delivery of materials and turbine elements. For the purpose of this investigation, low-profile flatbed or open-bottom (Schnabel) truck trailers will be used to offset overhead clearance limitations. Also, multi-axle trailers will be used to distribute oversized loads to acceptable levels, as stipulated by state special hauling permits.

Table 1 - Design Vehicle Characteristics

	Approximate Dimension of Component to be Transported, Inclusive of Vehicle				
Vehicle Characteristic	Blade	Nacelle	Tower Sections	Crane	
Width of vehicle, inclusive of load	12'	14.1'	14.1'	Unknown	
Height of vehicle, inclusive of load	14'	15.1'	15.1'	Unknown	
Length, inclusive of load and bumpers	210'	110'	188'	Unknown	
Total Weight of vehicle with 3 or more axels	79,000 lbs	354,000 lbs	233,000 lbs	Unknown	
Weight Per Axel, for 2- axel group	Unknown	Unknown	Unknown	Unknown	

2.0 PROBABLE ROUTE EVALUATION

2.1 Probable Routes

Regarding the Primary Road (Interstate 80/90/Ohio Turnpike), the interchanges appear to provide an adequate radius for a blade truck with rear-steering capability. At the toll booth locations, there is typically a bypass for oversized loads. Blade delivery trucks may need to pass through the toll booths due to turning movement restrictions. The means of access from I-80/90 will be verified after selection of a WTG model and the point of access along I-80/90 is determined.

As a part of this study, an evaluation and visual assessment of the probable secondary transportation roads was conducted by traveling the roadways listed below (see Figure 1 for location of roads). Table 2A and 2B summarizes the existing conditions of the secondary roadways.

Table 2A – Secondary Road Characteristics – Preferred Route

Road	From	То	2-Lane Width	Pavement Condition	Surface Type	Speed Limit
State Route 53	Interstate 80/90 Exit Ramp	State Route 20	24'	Good	Asphalt	Varies 35-55
U.S. Route 20	State Route 53	South County Road 260	24'	Good	Asphalt	Varies 35-55
State Route 18	County Road 62/ County Road 113	Township Road 122	28'	Good	Asphalt	55
State Route 101	County Road 62/ County Road 113	State Route 19	27'	Good	Asphalt	55
State Route 19	State Route 101	County Road 38	24'	Good	Asphalt	55

Table 2B - Secondary Road Characteristics - Alternative Route

Road	From	То	2-Lane Width	Pavement Condition	Surface Type	Speed Limit
State Route 4	Interstate 80/90 Exit Ramp	County Road 64	24'	Good	Asphalt	Varies 35-55
State Route 269	County Road 64	County Road 62/ County Road 113	24'	Good	Asphalt	55

The Ohio Department of Transportation (ODOT) District 2 and District 3 Bridge Engineers were contacted to discuss the load capacity of bridges and culverts along the portions of State Routes listed in Table 2A and Table 2B. Both the District 2 and District 3 engineers indicated that there are no "posted" bridge or culvert crossings along these specified routes. A bridge or culvert is 'posted' if it does not meet ODOT's loading/inspection requirements.

2.2 Constraints and Conceptual Improvements

Each of the secondary roads in Tables 2A and 2B have constraining features, particularly intersection radii. Possible constraining points were investigated in the field, and existing conditions were photo and video-documented. The path of the worst-case design vehicle (blade truck) was evaluated along each of the potential travel routes to identify whether intersection improvements may be required. Figures 1 and 2 show the locations of the intersections.

Individual diagrams at each intersection were developed to show turning movements (Figures 3 through 28). An AutoTurn® turning simulation analysis was performed using the blade truck (worst-case design vehicle) to generate the turning movements shown in these figures. Turning movements were generated to avoid utilities where possible; however, it may be necessary to relocate some utilities to complete turning movements. The figures show whether a utility impact is anticipated (i.e. utility within wheel path/vehicle body path). These figures can be used as a basis for potential improvement areas for constrained intersections along the potential travel routes.

Due to turning capabilities of the assumed delivery vehicles, tire paths may be shown outside the right-of-way limits. These limits will be confirmed when final information is obtained from the final wind turbine supplier and transportation provider. Impacts that would extend outside the right-of-way would require easements and/or land purchases from adjacent property owners.

The secondary roads were also investigated for height limitations. Permanent structures that cross over the road and restrict the clearance for oversized loads (such as bridges and overpasses) were found along the secondary roads. Along the Alternative Route (State Route 4 and State Route 269), there were no overpasses or bridges over the road. Along the Preferred Route (State Route 53 and State Route 20), there were multiple overpasses. No observations indicated a less-than-legal overhead clearance for these structures. The ODOT Location and Design Manual Figures 302-1E and 302-2E indicate that the minimum vertical clearance for Interstate and Other Freeway Bridges to remain is 14.5 feet. The selected transportation company will investigate the actual vertical clearances at these locations using the selected WTG and component delivery vehicles. For overhead cables, the national standard for minimum clearance over roads is 15.5 feet, and cables cross over the studied roadways in numerous locations. In the areas of likely intersection improvements (see Figures 3 through 28); cables and poles running parallel to the road may be in conflict with the travel routes. However, electric providers can (for a fee) temporarily or permanently raise the cables and/or move the poles. Therefore, cables should not be a limiting feature for the roads.

The secondary roads were observed for potential vertical curve/gradient limitations. Generally, the terrain throughout the Project Area is flat; the secondary road gradients were observed to be significantly less than 10%. Active railroads cross the Project Area at multiple locations. Typically, the railroads appear to have been constructed above grade, with road approaches that elevate to meet the rail line. Railroad crossing approach improvements may be necessary to provide a more gentle transition over the rail intersections and prevent a delivery vehicle from "bottoming out". A more detailed investigation for necessary improvements at the rail locations will be performed during design of the infrastructure improvements when a WTG model has been selected and capabilities of WTG component vehicles are known. Locations where railroads cross project roads are designated with a Railroad Crossing symbol on Figure 1 and Figure 2.

Table 3A - Limitations of Secondary Roads and Conceptual Improvements - Preferred Route

Road	From	То	Figures	Weight Limit if Super Load Permit is Obtained	Minimum Clearance of Overhead Obstructions
State Route 53	Interstate 80/90	State Route 20	No. 3	None	14.5' Min.
U.S. Route 20	State Route 53	South County Road 260	Nos. 3, 4	None	1 <i>4</i> .5' Min.
State Route 18	County Road 62/ County Road 113	Township Road 122	Nos. 8, 9, 11, 12, 18	None	15.5' Min.
State Route 101	County Road 62/ County Road 113	State Route 19	Nos. 7, 25	None	15.5' Min.
State Route 19	State Route 101	County Road 38	Nos. 21, 22, 24	None	15.5' Min.

Table 3B - Limitations of Secondary Roads and Conceptual Improvements - Alternative Route*

Road	From	То	Figures	Weight Limit if Super Load Permit is Obtained	Minimum Clearance of Overhead Obstructions
State Route 4	Interstate 80/90	East County Road 24	Nos. 3, 6	None	15.5' Min.
State Route 269	County Road 64	County Road 113	Nos. 6, 7	None	15.5' Min.

2.3 Loads and Permits

Special hauling permits are required when loads exceed legal dimensions or weights. Table 4 summarizes these maximum legal dimensions for State of Ohio highways. Transportation of the blades, nacelles, tower sections, and cranes will require Special Hauling Permits for a variety of criteria. Each vehicle must receive

an individual Special Hauling Permit from the ODOT Central Office. Permits are issued by ODOT for various vehicle criteria, but all permits have the name "Special Hauling Permit."

The specifications of the Special Hauling Permit depend on the characteristics of the vehicle, its cargo, and the duration of the delivery schedule. The total weight of Nacelles combined with the transport vehicle can exceed 360,000 pounds. If any vehicle exceeds 120,000 pounds, 14 feet wide, or 14.5 feet in height, a permit via the "super load" process is required. Table 4 presents the criteria for Special Hauling Permits as well as the approximate dimensions for the project delivery vehicles. The Special Hauling Permit fees and the Special Hauling Permit application are included in **Appendix B**.

Table 4 – Dimensional Criteria for Special Hauling Permits

	State	State Highway Limit with	Approximate Dimension of Component to be Transported, Inclusive of Vehicle				
Vehicle Characteristic	Highway Limit	Special Hauling Permit	Blade	Nacelle	Tower Sections	Crane Sections	
Width of vehicle, inclusive of load	8.5 Feet	None	12'	14.1'	14.1'	Unknown*	
Height of vehicle, inclusive of load	13.5 Feet	None	14'	15.1'	15.1'	Unknown*	
Length of vehicle, inclusive of load and bumpers	85 Feet	None	209'	110'	188'	Unknown*	
Total Weight of vehicle with 3 or more axels	80,000 Pounds	None	79,000 lbs	354,000 lbs	233,000 lbs	Unknown*	
Weight Per Axel, for 2-axel group	34,000 Pounds	Usually 46,000 Pounds	Unknown	Unknown	Unknown	Unknown*	

^{*} Crane sections are typically designed to be disassembled and transported without Super Load Permits

2.4 Conclusions for Secondary Roads

The purpose of this evaluation is to identify probable secondary travel routes; identify constraints for height, width, turning radii, and weight along the routes; and determine potential improvements required for delivery of major wind turbine components during the construction of the project.

Along the Preferred Route, height constraints including bridges/overpasses and some overhead cables were identified, improvements may be necessary at the railroad crossing on County Road 260 and at select intersections, and special hauling permits will be required for many components.

Along the Alternative Route, no height or width constraints other than overhead cables were identified, improvements may be necessary at select intersections, and special hauling permits will be required for many components.

Special hauling permits will also be required due to the weight of the components; however, specialized transport vehicles with numerous axels can be used to distribute the weight, minimize the effects to the roadway, and comply with the special hauling permit requirements.

3.0 PRELIMINARY ASSESSMENT OF TERTIARY ROADS

3.1 Visual Observation Results

The following roads were investigated on a preliminary basis, and a general summary of the results is presented next to each road.

- County Road 113/ East County Road 62 from State Route 269 west to State Route 101: 18.5 to 24-foot pavement width; asphalt in good condition with berm; probable turning constraints; possible grade issues at railroad crossing depending on trailer dimensions; possible low overhead electric lines along road at multiple locations. No bridges/overpasses observed.
- County Road 292 from County Road 113/ East County Road 62 north to project boundary: 20-foot pavement width; asphalt pavement in fair condition with minor fatigue cracking; no berm; probable turning constraints; possible grade issues at railroad crossing depending on trailer dimensions; possible low overhead electric lines along road at two locations. No bridges/overpasses observed.
- 3. Township Road 82 from County Road 113/ East County Road 62 south to County Road 34: 20 foot pavement width; asphalt in fair to good condition with no berm; probable turning constraints; possible low overhead electric lines at residences; no bridges/overpasses observed.
- 4. North Township Road 76 from East Township Road 148 north to East Township Road 164: 18 to 21-foot pavement width; asphalt in good condition; small gravel shoulder; probable turning constraints; possible low overhead electric lines at residences; no bridges/overpasses observed.
- 5. East County Road 34 from State Route 18 east to State Route 269: 19.5 to 24-foot pavement width; asphalt in good condition; no berm; low to moderate cracking recently sealed; probable turning constraints; possible grade issues at railroad crossing depending on trailer dimensions; possible low overhead electric lines along road at multiple locations. No bridges/overpasses observed.
- 6. Township Road 178 from Township Road 81east to State Route 269: 18.5-foot pavement width; asphalt pavement in fair condition with moderate to severe edge and centerline cracking; no berm; probable turning constraints; possible grade issues at railroad crossing depending on trailer dimensions; possible low overhead electric lines along road at two locations. No bridges/overpasses observed.
- 7. North Township Road 81 from State Route 18 south to East Township Road: 12-foot pavement width; asphalt in fair to good condition; small gravel shoulder; probable turning constraints; possible low overhead electric lines at residences; no bridges/overpasses observed.
- 8. County Road 32 from State Route 18 west to State Route 19: 19-foot pavement width; asphalt pavement in fair to good condition with low to moderate wheel rutting/cracking; no berm; probable turning constraints; possible low overhead electric lines along road at multiple locations; no bridges/overpasses observed.

- 9. County Road 44 from State Route 101 west to Township Road 76: 19-foot pavement width; asphalt pavement in fair to good condition with low to moderate wheel rutting/cracking; no berm; probable turning constraints, including a jog in the road at the intersection with Township Road 169; possible low overhead electric lines along road at multiple locations; one box culvert observed just west of State Route 19.
- 10. North Township Road 169 from East County Road 44 north to East Township Road 164: 16-foot pavement width; asphalt in fair to good condition; small gravel shoulder; probable turning constraints; possible low overhead electric lines at residences; no bridges/overpasses observed.
- 11. County Road 46 from County Road 27 18 east to County Road 29: 21-foot pavement width; asphalt in good condition; no berm; probable turning constraints; possible grade issues at railroad crossing depending on trailer dimensions; possible low overhead electric lines along road at two locations. One box culvert observed along route.
- 12. County Road 27 from State Route 18 south to County Road 46: 21-foot pavement width; asphalt in good condition; no berm; probable turning constraints. No bridges/overpasses observed.
- 13. Township Road 148 from County Road 21 west to North Township Road 175:17 feet pavement width; asphalt in good condition with berm; probable turning constraints. One bridge along route located just west of intersection with SR-19.
- 14. Township Road 148 from North Township Road 76 west to North Township Road 167: 16-foot pavement width; asphalt pavement in fair condition with berm; probable turning constraints; no low overhead electric lines and no bridges/overpasses observed along route; steep grade observed along route.
- 15. North Township Road 175 from southern project boundary north to East State Route 19: 12- foot asphalt pavement; asphalt in good condition with berm; probable turning constraints; possible low overhead electric lines along road at residences; no bridges/overpasses observed along route.
- 16. Township Road 179 from County Road 38 south to East County Road 24: 16- foot asphalt pavement width; asphalt in good condition with berm; probable turning constraints; possible low overhead electric lines along road at multiple locations; no bridges/overpasses observed.
- 17. East County Road 24 from County Road 21 east to eastern project boundary: 19-foot pavement width; asphalt in good condition; no berm; probable turning constraints; possible low overhead electric lines along road at multiple locations. Three box culverts were observed along the route.
- 18. North Township Road 77 from State Route 18 south to State Route 162: 12 to 14-foot pavement width; asphalt in fair to good condition with berm; probable turning constraints; possible low overhead electric lines along road at residences; one box culvert observed along route.
- 19. East Township Road 124 from North Township Road 77 west to project boundary: 12.5-foot pavement width; chipseal pavement in good condition with berm; probable turning constraints; no low overhead electric lines and no bridges/overpasses observed along route.

- 20. County Road 27 from Township Road 122 north to Township Road 136: 22 to 25-foot pavement width; asphalt in fair to good condition; no berm; probable turning constraints; possible grade issue at one location; possible low overhead electric lines along road at multiple locations. Slight horizontal curve in road at intersection with CR-38. Three box culverts were observed along the route.
- 21. Township Road 138 from Township Road 179 west to proposed turbine access road: 17.5-foot pavement width; asphalt pavement in good condition;; no berms. One bridge was observed along the route between TR-179 and SR-19.
- 22. East Township Road 136 from County Road 27 east to eastern project boundary: 13-foot single lane road; gravel and chipseal road surface in good condition with 1 foot berms on each side; probable turning constraints. One bridge and one box culvert bridge observed along road.
- 23. Township Road 134 from Township Road 80 west to County Road 27: 13-foot single lane chip seal pavement width; poor conditions for approximately 500 ft where chip seal is completely deteriorated in spots ("Rough Road" sign posted for this area); pavement in fair condition otherwise, with moderate edge raveling. No overhead clearance issues observed. No bridges/overpasses observed.
- 24. County Road 38 from County Road 27 west to proposed turbine access road and from Township Road 179 to State Route 19: 18.5-foot pavement width; asphalt in good condition, with cracks recently sealed; no berm; probable turning constraints. No overhead clearance or grade issues observed along road. One box culvert observed along the route.
- 25. Township Road 183 from County Road 38 south to East Township Road 124: 11 to 16.5-foot pavement width with berms; chipseal in fair condition, with cracks recently sealed; probable turning constraints. No overhead clearance or grade issues observed along road. No bridges/overpasses observed.
- 26. East Township Road 122 from North Township Road 77 east to Township Road 183: 12-foot pavement width; asphalt pavement in good condition; small berm; probable turning constraints; possible low overhead electric lines in one location; no bridges/overpasses observed.

4.0 POTENTIAL IMPACTS TO ROADWAYS

The development of a wind-powered, electric generating facility has the potential to create transportation impacts as a result of short-term construction activities. The following sections estimate the trip generation for construction vehicles during the project and outline steps for mitigating the impacts to roadways.

4.1 Construction Traffic

The Project Area is served by state and local roadways. To deliver the turbine components, concrete, gravel, equipment, and construction workers to each turbine site during the construction of the facility, these roads will experience increased truck traffic. The exact construction vehicles have not yet been determined, but the following provides an order-of-magnitude estimate for the trip generation for each truck type:

- Gravel trucks with capacity of approximately 10 cubic yards (CY) per truck and an estimated gross weight of 75,000 pounds (lbs), for access road construction (estimated total of 4,000 trips throughout construction).
- Concrete trucks for construction of tower foundations with capacity of approximately 8 CY per truck and an estimated gross weight of 75,000 lbs (estimated total of approximately 4,600 trips throughout construction).
- Flatbed trucks (multiple axels to distribute loads) for transporting turbine components. These trucks can have gross weights up to 360,000 lbs; lengths (inclusive of tractor) up to 210 feet; widths up to 14.1 feet; and heights up to 15.1 feet. The estimated trips for each turbine components are as follows:

Turbine Component	Assumption	Trips
Blades	1 blade per truck	174
Towers	4 tower sections per turbine	232
Nacelle and Hub	3 loads per turbine	174

- Pickup trucks for equipment and tools.
- Trucks and cars for transporting construction workers.
- Oversize trucks for crane assembly/erection.

A final delivery route has not yet been finalized, but it is likely that delivery of turbine components to the Project Area will be from the northeast by way of Interstate-80/90 (Ohio Turnpike) to State Route 4 or from the northwest by way of Interstate-80/90 (Ohio Turnpike) to State Route 53, then State Route 20. Within the Project Area, several county and township roads and new gravel access roads will likely be used to deliver components to each turbine site. Prior to construction, such factors as highway limitations,

planned work schedules for state and local roadways, road widening, intersection improvements, utility relocations, railroad crossing geometry and potential delays, and bridge/culvert reinforcement will be assessed by the selected transportation company.

Oversized construction vehicles could cause minor delays on public roads in the vicinity of the project, but these are unlikely to be significant given the relatively low traffic volume through the area. Most of the impacts will be to transportation infrastructure due to roadway improvements for oversized vehicles. Temporary turn-outs may be installed to allow uninterrupted flow of traffic, and spot radii widening may be used to accommodate the turning radius of over-length vehicles. Overhead utility line re-location projects will be needed in some areas to accommodate over-height vehicles and turning radii. Culvert and/or bridge reinforcement projects are also likely along main delivery routes for heavy vehicles.

There are locations along the identified routes where component delivery vehicles and construction traffic will cross into opposing lanes of traffic. With the assistance of Law Enforcement Officers (LEO), escorts, and/or flaggers, the maintenance of traffic (MOT) concerns will be adequately addressed.

4.2 Proposed Mitigation

Prior to construction, the selected transportation provider will obtain all necessary permits from ODOT and the Sandusky and Seneca County Engineers. Permits will likely be required for oversized loads; new access points, improving existing roadways, and crossing highways with buried electrical interconnects. The Final Transportation Routing Plan will be provided to the government agencies prior to the start of the project.

All public upgrades that may be required to accommodate construction vehicles will be identified as part of the Final Transportation Routing Plan, based on the routes selected. The following mitigation techniques may be utilized to avoid or minimize transportation-related impacts and/or to provide long-term improvement to the local road system:

4.2.1 Insufficient Roadway Width

- Widening roadway width to accommodate construction vehicles.
- Rerouting over-width vehicles to wider roadways.

4.2.2 Insufficient Vertical Clearance

- Temporarily relocating overhead utility lines and poles.
- Permanently relocating overhead utility lines and poles.

Rerouting over-height vehicles to roadways with sufficient vertical clearance.

4.2.3 Insufficient Cover over Drainage Structures

- Adding temporary gravel.
- Reinforcing structures with bracing.
- Using bridge jumpers to clear structures.
- Replacing structures prior to construction.
- Repairing structures during or after construction if damaged by construction traffic.
- Rerouting heavy-loaded vehicles to avoid structures.

4.2.4 Poor Structure Condition

- Repairing structure prior to construction.
- Replacing structure during or after construction if damaged by construction traffic.
- Using bridge jumpers to clear structures.
- Rerouting heavy-loaded vehicles to avoid structures.

4.2.5 Inadequate Bridge Capacity

- Using bridge jumpers to clear bridges.
- Reinforcing bridge with additional longitudinal or lateral support beams
- Replacing bridge components that provide insufficient capacity.
- Rerouting heavy-loaded vehicles to avoid bridges.

4.2.6 Insufficient Roadway Geometry

- Constructing appropriate turning radii at intersections where construction traffic is anticipated. This includes clearing and grubbing of existing vegetation; grading of the terrain to accommodate the improvement; extension of existing drainage pipes and/or culverts; re-locating utility poles if necessary; re-establishment of ditch line if necessary; and construction of a suitable roadway surface to carry the construction traffic, based on the existing geotechnical conditions.
- Rerouting over-sized vehicles to avoid insufficient roadway geometry.
- Profile adjustments to roadways with insufficient vertical geometry.

The selected roadways will also be video-documented to establish existing conditions prior to, and after construction. Upon completion of the project, Apex will, at a minimum, return all roadways to their preconstruction conditions. The process of documenting roadway conditions and restoring impacted roads after construction will be performed in conjunction with state and local permitting.

5.0 CONCLUSIONS

Based on information collected during the field investigation, delivery vehicle assumptions, and information available from ODOT, sufficient infrastructure exists via primary and secondary roads to transport the turbine components to the Project Area. A number of intersection radii improvements will be required. Specialized transport vehicles are available to offset vertical clearance limitations at overpasses and bridges along the probable routes, such as Interstate-80/90, State Route 53, and U.S. Route 20. These vehicles are also capable of distributing the weights of loads to acceptable levels along the probable routes.


A transportation provider experienced with oversized loads will be engaged to provide a Final Transportation Routing Plan including all primary, secondary, and tertiary roads. The Plan will be performed in conjunction with the special hauling permit process for the Ohio Department of Transportation (and other state DOTs for out-of-state deliveries). Construction plans will be prepared for any roadway or intersection improvements. These improvements could be temporary or permanent. All temporary improvements will be restored to their pre-construction condition following completion of construction. All work will be coordinated and approved by the appropriate regulatory agency prior to construction.


FIGURES


HULL & ASSOCIATES, INC.

DUBLIN, OHIO


DECEMBER 2017
ACX003.300.0005

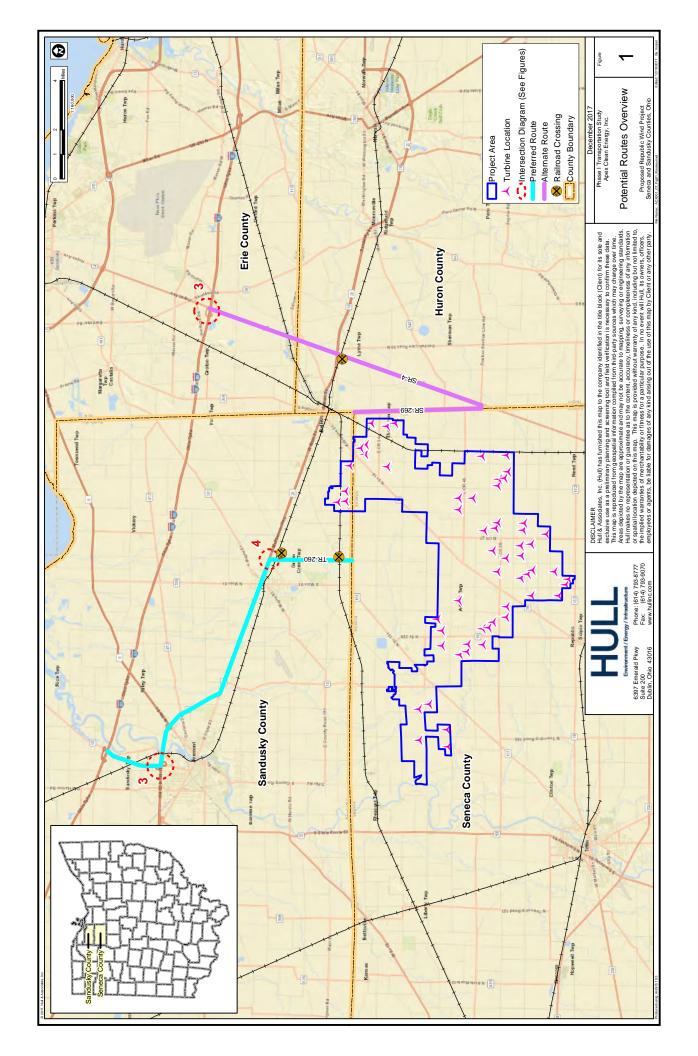

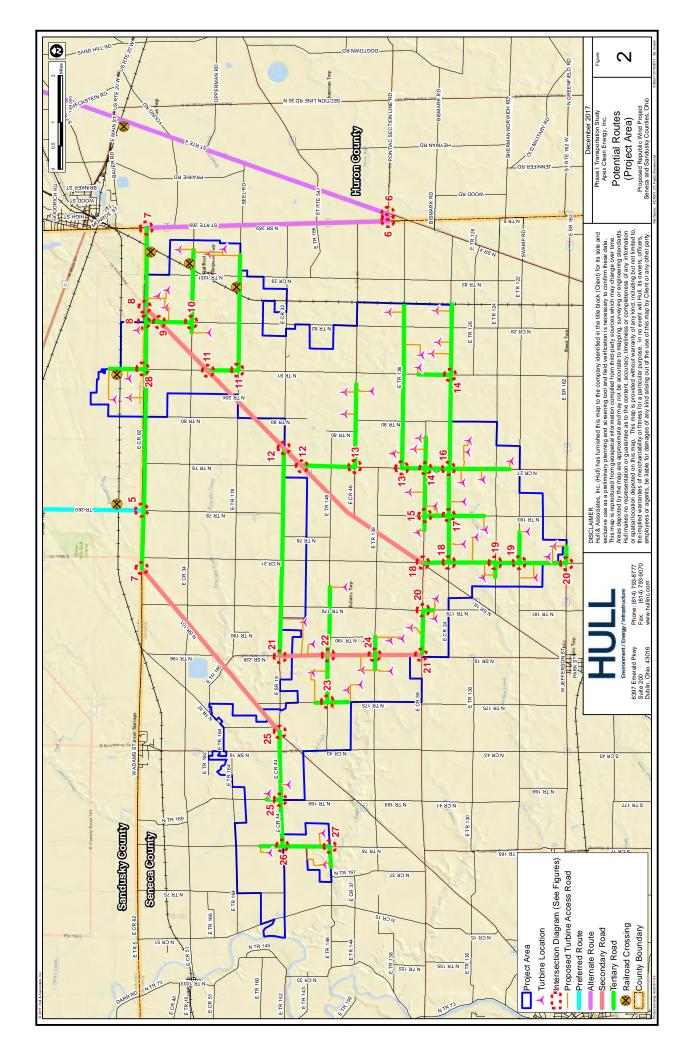

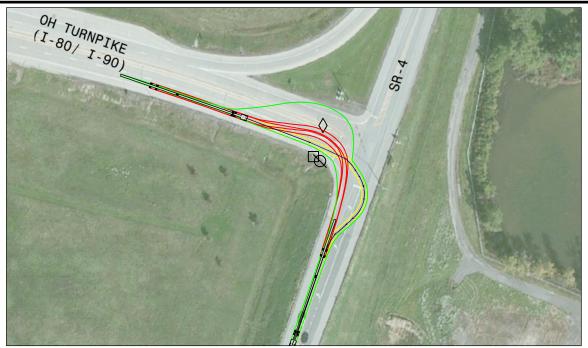

OHIO TURNPIKE (I-80/ I-90) TO STATE ROUTE 4

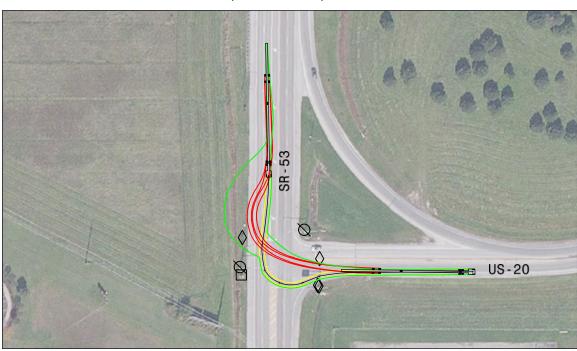

STATE ROUTE 53 TO US-20 EASTBOUND RAMP

ROAD SIGN

LEGEND

NOTE: TURNING MOVEMENTS BASED ON LIMITED FIELD SURVEY DATA AND AERIAL IMAGERY. ALL TURNING MOVEMENTS TO BE VERIFIED PRIOR TO ROAD IMPROVEMENT DESIGN.


BHULL

BROWNFIELDS SHALE OIL & GAS WASTE MANAGEMENT ENVIRONMENTAL ALTERNATIVE ENERGY

© 2016 Hull & Associates, Inc. 6397 Emerald Parkway Phone: (614) 793-8777 Suite 200 Fax: (614) 793-9070 Dublin, Ohio 43016 www.hullinc.com PHASE I TRANSPORTATION STUDY APEX CLEAN ENERGY, INC.

TURNING MOVEMENTS FIGURE 3

PROJECT NO.: ACXOO3	SUBMITTAL DATE:	DECEMBER 2017
CAD DWG FILE: ACX003.300.0001	PLOT DATE:	12/18/2017

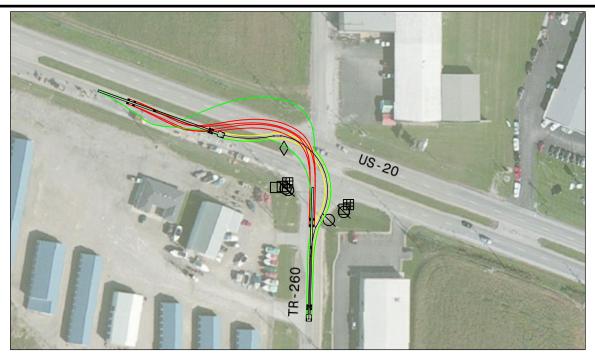

US-20 EASTBOUND TO TOWNSHIP ROAD 260

NOTE: TURNING MOVEMENTS BASED ON LIMITED FIELD SURVEY DATA AND AERIAL IMAGERY. ALL TURNING MOVEMENTS TO BE VERIFIED PRIOR TO ROAD IMPROVEMENT DESIGN.

- Ø UTILITY POLE
- UTILITY BOX Δ UNDERGROUND UTILITY MARKER
- TREE
- ROAD SIGN

CATCH BASIN FRONT TIRE PATH - REAR TIRE PATH

VEHICLE BODY

PHASE I TRANSPORTATION STUDY APEX CLEAN ENERGY, INC.

TURNING MOVEMENTS

FIGURE 4

PROPOSED REPUBLIC WIND PROJECT SANDUSKY AND SENECA COUNTIES, OHIO

PROJECT NO.: ACX003 SUBMITTAL DATE: DECEMBER 2017 CAD DWG FILE: ACX003.300.0001 PLOT DATE: 12/18/2017



BROWNFIELDS SHALE OIL & GAS WASTE MANAGEMENT ENVIRONMENTAL ALTERNATIVE ENERGY

© 2016 Hull & Associates, Inc. 6397 Emerald Parkway Phone: (614) 793-8777 Suite 200 Fax: (614) 793-9070 Dublin, Ohio 43016 www.hullinc.com



TOWNSHIP ROAD 260 SOUTHBOUND TO COUNTY ROAD 62/113 EASTBOUND



TOWNSHIP ROAD 260 SOUTHBOUND TO COUNTY ROAD 62/113 WESTBOUND

\(\text{\Quad UTILITY POLE} \)
\(\text{\Quad UTILITY POLE} \)
\(\text{\Quad UTILITY BOX} \)
\(\text{\Quad UTILITY BOX} \)
\(\text{\Quad UTILITY BOX} \)
\(\text{\Quad UTILITY MARKER} \)
\(\text{\Quad UNDERGROUND UTILITY MARKER} \)
\(\text{\Quad PEAR TIRE PATH MARKER} \)
\(\text{\Quad POAD SIGN} \)
\(\text{\Quad POAD SIGN} \)




BROWNFIELDS SHALE OIL & GAS WASTE MANAGEMENT ENVIRONMENTAL ALTERNATIVE ENERGY


© 2016 Hull & Associates, Inc. 6397 Emerald Parkway Phone: (614) 793-8777 Suite 200 Fax: (614) 793-9070 Dublin, Ohio 43016 www.hullinc.com PHASE I TRANSPORTATION STUDY APEX CLEAN ENERGY, INC.

TURNING MOVEMENTS FIGURE 5

PROJECT NO.: ACXOO3	SUBMITTAL DATE:	DECEMBER 2017
CAD DWG FILE: ACX003.300.0001	PLOT DATE:	12/18/2017

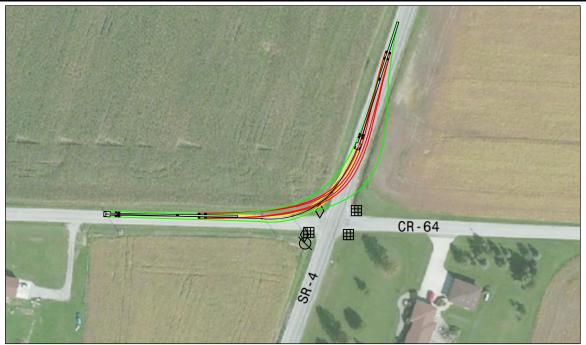

STATE ROUTE 4 SOUTHBOUND TO COUNTY ROAD 64

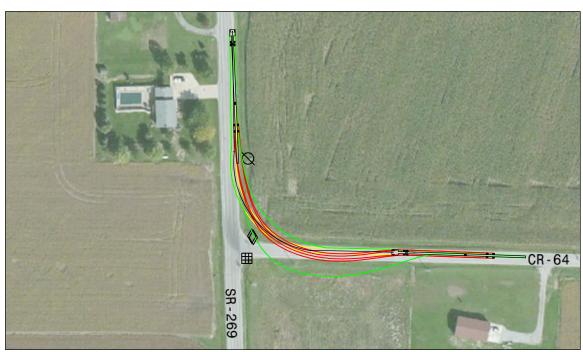

COUNTY ROAD 64 TO STATE ROUTE 269

ROAD SIGN

<u>LEGEND</u>

NOTE: TURNING MOVEMENTS BASED ON LIMITED FIELD SURVEY DATA AND AERIAL IMAGERY. ALL TURNING MOVEMENTS TO BE VERIFIED PRIOR TO ROAD IMPROVEMENT DESIGN.


BHULL

BROWNFIELDS SHALE OIL & GAS WASTE MANAGEMENT ENVIRONMENTAL ALTERNATIVE ENERGY

© 2016 Hull & Associates, Inc. 6397 Emerald Parkway Phone: (614) 793-8777 Suite 200 Fax: (614) 793-9070 Dublin, Ohio 43016 www.hullinc.com PHASE I TRANSPORTATION STUDY APEX CLEAN ENERGY, INC.

TURNING MOVEMENTS FIGURE 6

PROJECT NO.: ACXOO3	SUBMITTAL DATE:	DECEMBER 2017
CAD DWG FILE: ACX003.300.0001	PLOT DATE:	12/18/2017

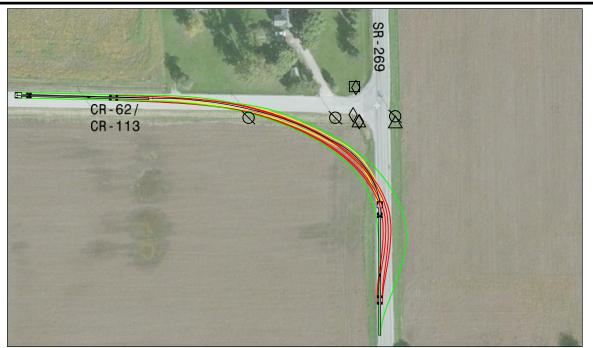

STATE ROUTE 269 TO COUNTY ROAD 62 / COUNTY ROAD 113 WESTBOUND



COUNTY ROAD 62 / COUNTY ROAD 113 TO STATE ROUTE 101 SOUTHBOUND

ROAD SIGN

NOTE: TURNING MOVEMENTS BASED ON LIMITED FIELD SURVEY DATA AND AERIAL IMAGERY. ALL TURNING MOVEMENTS TO BE VERIFIED PRIOR TO ROAD IMPROVEMENT DESIGN.

LEGEND UTILITY POLE UTILITY BOX FRONT TIRE PATH UNDERGROUND UTILITY MARKER REAR TIRE PATH WEHICLE BODY

HULL

BROWNFIELDS SHALE OIL & GAS WASTE MANAGEMENT ENVIRONMENTAL ALTERNATIVE ENERGY


© 2016 Hull & Associates, Inc. 6397 Emerald Parkway Phone: (614) 793-8777 Suite 200 Fax: (614) 793-9070 Dublin, Ohio 43016 www.hullinc.com PHASE I TRANSPORTATION STUDY APEX CLEAN ENERGY, INC.

TURNING MOVEMENTS FIGURE 7

PROJECT NO.: ACXOO3	SUBMITTAL DATE:	DECEMBER 2017
CAD DWG FILE: ACX003.300.0001	PLOT DATE:	12/18/2017



COUNTY ROAD 62 / COUNTY ROAD 113 TO TOWNSHIP ROAD 82 SOUTHBOUND

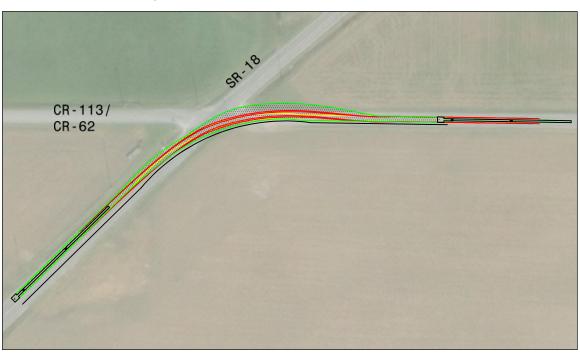

COUNTY ROAD 62 / COUNTY ROAD 113 TO STATE ROUTE 18 SOUTHBOUND

NOTE: TURNING MOVEMENTS BASED ON LIMITED FIELD SURVEY DATA AND AERIAL IMAGERY. ALL TURNING MOVEMENTS TO BE VERIFIED PRIOR TO ROAD IMPROVEMENT DESIGN.

LEGEND

HULL

BROWNFIELDS SHALE OIL & GAS WASTE MANAGEMENT ENVIRONMENTAL ALTERNATIVE ENERGY

© 2016 Hull & Associates, Inc. 6397 Emerald Parkway Phone: (614) 793-8777 Suite 200 Fax: (614) 793-9070 Dublin, Ohio 43016 www.hullinc.com PHASE I TRANSPORTATION STUDY APEX CLEAN ENERGY, INC.

TURNING MOVEMENTS FIGURE 8

PROJECT NO.: ACXOO3	SUBMITTAL DATE:	DECEMBER 2017
CAD DWG FILE: ACX003.300.0001	PLOT DATE:	12/18/2017



STATE ROUTE 18 TO TOWNSHIP ROAD 82 SOUTHBOUND



TOWNSHIP ROAD 82 TO STATE ROUTE 18 SOUTHBOUND

\(\text{\Quad UTILITY POLE} \)
\(\text{\Quad UTILITY POLE} \)
\(\text{\Quad UTILITY BOX} \)
\(\text{\Quad UTILITY BOX} \)
\(\text{\Quad UTILITY BOX} \)
\(\text{\Quad UTILITY MARKER} \)
\(\text{\Quad UNDERGROUND UTILITY MARKER} \)
\(\text{\Quad PEAR TIRE PATH MARKER} \)
\(\text{\Quad POAD SIGN} \)
\(\text{\Quad POAD SIGN} \)



BROWNFIELDS SHALE OIL & GAS WASTE MANAGEMENT ENVIRONMENTAL ALTERNATIVE ENERGY


© 2016 Hull & Associates, Inc. 6397 Emerald Parkway Phone: (614) 793-8777 Suite 200 Publin, Ohio 43016 Fax: (614) 793-9070 www.hullinc.com PHASE I TRANSPORTATION STUDY APEX CLEAN ENERGY, INC.

TURNING MOVEMENTS FIGURE 9

PROJECT NO.: ACXOO3	SUBMITTAL DATE:	DECEMBER 2017
CAD DWG FILE: ACX003.300.0001	PLOT DATE:	12/18/2017



TOWNSHIP ROAD 82 TO COUNTY ROAD 34 WESTBOUND

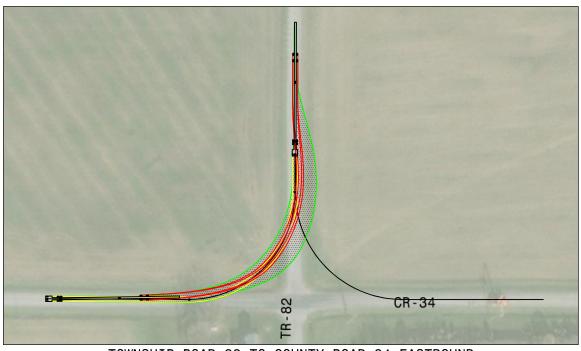

TOWNSHIP ROAD 82 TO COUNTY ROAD 34 EASTBOUND

NOTE: TURNING MOVEMENTS BASED ON LIMITED FIELD SURVEY DATA AND AERIAL IMAGERY. ALL TURNING MOVEMENTS TO BE VERIFIED PRIOR TO ROAD IMPROVEMENT DESIGN.

HULL

BROWNFIELDS SHALE OIL & GAS WASTE MANAGEMENT ENVIRONMENTAL ALTERNATIVE ENERGY

© 2016 Hull & Associates, Inc. 6397 Emerald Parkway Phone: (614) 793-8777 Suite 200 Fax: (614) 793-9070 Dublin, Ohio 43016 www.hullinc.com PHASE I TRANSPORTATION STUDY APEX CLEAN ENERGY, INC.

TURNING MOVEMENTS FIGURE 10


PROPOSED REPUBLIC WIND PROJECT SANDUSKY AND SENECA COUNTIES, OHIO

 PROJECT NO.:
 ACX003
 SUBMITTAL DATE:
 DECEMBER 2017

 CAD DWG FILE:
 ACX003.300.0001
 PLOT DATE:
 12/18/2017



STATE ROUTE 18 TO TOWNSHIP ROAD 81 SOUTHBOUND

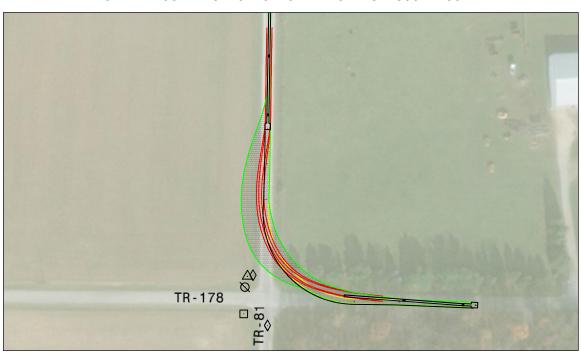

TOWNSHIP ROAD 81 TO TOWNSHIP ROAD 178 EASTBOUND

UTILITY POLE
 UTILITY BOX
 FRONT TIRE PATH
 UNDERGROUND UTILITY MARKER
 REAR TIRE PATH

 TREE
 VEHICLE BODY

 ROAD SIGN

 CATCH BASIN
 FRONT TIRE PATH
 REAR TIRE PATH
 VEHICLE BODY

NOTE: TURNING MOVEMENTS BASED ON LIMITED FIELD SURVEY DATA AND AERIAL IMAGERY. ALL TURNING MOVEMENTS TO BE VERIFIED PRIOR TO ROAD IMPROVEMENT DESIGN.

HULL

BROWNFIELDS SHALE OIL & GAS WASTE MANAGEMENT ENVIRONMENTAL ALTERNATIVE ENERGY

© 2016 Hull & Associates, Inc. 6397 Emerald Parkway Phone: (614) 793-8777 Suite 200 Fax: (614) 793-9070 Dublin, Ohio 43016 www.hullinc.com PHASE I TRANSPORTATION STUDY APEX CLEAN ENERGY, INC.

TURNING MOVEMENTS FIGURE 11

PROJECT NO.: ACXOO3	SUBMITTAL DATE:	DECEMBER 2017
CAD DWG FILE: ACX003.300.0001	PLOT DATE:	12/18/2017



STATE ROUTE 18 TO COUNTY ROAD 32 WESTBOUND



STATE ROUTE 18 TO COUNTY ROAD 27 SOUTHBOUND

Ø UTILITY POLE CATCH BASIN UTILITY BOX FRONT TIRE PATH NOTE: TURNING MOVEMENTS BASED ON LIMITED FIELD SURVEY DATA AND AERIAL IMAGERY. ALL TURNING MOVEMENTS TO BE VERIFIED PRIOR TO Δ UNDERGROUND UTILITY MARKER - REAR TIRE PATH TREE VEHICLE BODY ROAD SIGN

BROWNFIELDS SHALE OIL & GAS WASTE MANAGEMENT ENVIRONMENTAL ALTERNATIVE ENERGY

ROAD IMPROVEMENT DESIGN.

© 2016 Hull & Associates, Inc. 6397 Emerald Parkway Phone: (614) 793-8777 Suite 200 Fax: (614) 793-9070 Dublin, Ohio 43016 www.hullinc.com


PHASE I TRANSPORTATION STUDY APEX CLEAN ENERGY, INC.

TURNING MOVEMENTS FIGURE 12

PROJECT NO.: ACXOO3	SUBMITTAL DATE:	DECEMBER 2017
CAD DWG FILE: ACX003.300.0001	PLOT DATE:	12/18/2017



COUNTY ROAD 27 TO COUNTY ROAD 46 EASTBOUND

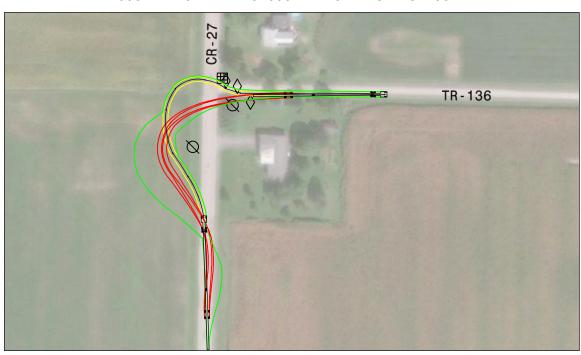

COUNTY ROAD 27 TO TOWNSHIP ROAD 136 EASTBOUND

NOTE: TURNING MOVEMENTS BASED ON LIMITED FIELD SURVEY DATA AND AERIAL IMAGERY. ALL TURNING MOVEMENTS TO BE VERIFIED PRIOR TO ROAD IMPROVEMENT DESIGN.


BHULL

BROWNFIELDS SHALE OIL & GAS WASTE MANAGEMENT ENVIRONMENTAL ALTERNATIVE ENERGY

© 2016 Hull & Associates, Inc. 6397 Emerald Parkway Phone: (614) 793-8777 Suite 200 Fax: (614) 793-9070 Dublin, Ohio 43016 www.hullinc.com PHASE I TRANSPORTATION STUDY APEX CLEAN ENERGY, INC.

TURNING MOVEMENTS FIGURE 13

PROJECT NO.: ACXOO3	SUBMITTAL DATE:	DECEMBER 2017
CAD DWG FILE: ACX003.300.0001	PLOT DATE:	12/18/2017

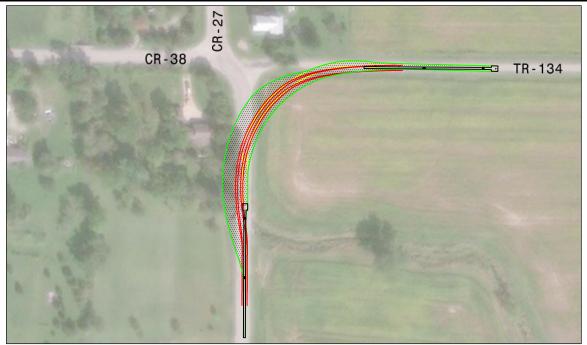

COUNTY ROAD 27 TO TOWNSHIP ROAD 148 EASTBOUND



COUNTY ROAD 24 TO TOWNSHIP ROAD 81 NORTHBOUND

<u>LEGEND</u>

\(\text{\Quad UTILITY POLE} \)
\(\text{\Quad UTILITY POLE} \)
\(\text{\Quad UTILITY BOX} \)
\(\text{\Quad UTILITY BOX} \)
\(\text{\Quad UTILITY BOX} \)
\(\text{\Quad UTILITY MARKER} \)
\(\text{\Quad UNDERGROUND UTILITY MARKER} \)
\(\text{\Quad PEAR TIRE PATH MARKER} \)
\(\text{\Quad POAD SIGN} \)
\(\text{\Quad POAD SIGN} \)




BROWNFIELDS SHALE OIL & GAS WASTE MANAGEMENT ENVIRONMENTAL ALTERNATIVE ENERGY

© 2016 Hull & Associates, Inc. 6397 Emerald Parkway Phone: (614) 793-8777 Suite 200 Fax: (614) 793-9070 Dublin, Ohio 43016 www.hullinc.com PHASE I TRANSPORTATION STUDY APEX CLEAN ENERGY, INC.

TURNING MOVEMENTS FIGURE 14

PROJECT NO.: ACXOO3	SUBMITTAL DATE:	DECEMBER 2017
CAD DWG FILE: ACX003.300.0001	PLOT DATE:	12/18/2017

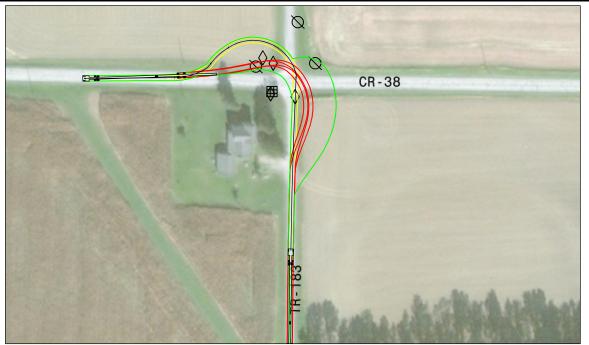

TOWNSHIP ROAD 183 NORTHBOUND TO COUNTY ROAD 38 WESTBOUND



TOWNSHIP ROAD 183 NORTHBOUND TO COUNTY ROAD 38 EASTBOUND

Ø UTILITY POLE \blacksquare CATCH BASIN UTILITY BOX FRONT TIRE PATH NOTE: TURNING MOVEMENTS BASED ON LIMITED Δ UNDERGROUND UTILITY MARKER - REAR TIRE PATH FIELD SURVEY DATA AND AERIAL IMAGERY. ALL TURNING MOVEMENTS TO BE VERIFIED PRIOR TO TREE VEHICLE BODY ROAD IMPROVEMENT DESIGN. ROAD SIGN




BROWNFIELDS SHALE OIL & GAS WASTE MANAGEMENT ENVIRONMENTAL ALTERNATIVE ENERGY


© 2016 Hull & Associates, Inc. 6397 Emerald Parkway Phone: (614) 793-8777 Suite 200 Fax: (614) 793-9070 Dublin, Ohio 43016 www.hullinc.com PHASE I TRANSPORTATION STUDY APEX CLEAN ENERGY, INC.

TURNING MOVEMENTS FIGURE 15

PROJECT NO.: ACXOO3	SUBMITTAL DATE:	DECEMBER 2017
CAD DWG FILE: ACX003.300.0001	PLOT DATE:	12/18/2017

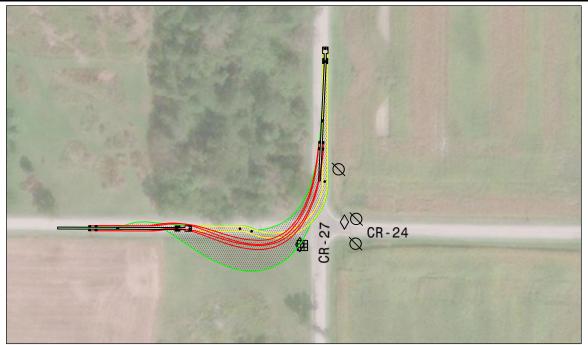

COUNTY ROAD 24 EASTBOUND TO COUNTY ROAD 27 NORTHBOUND

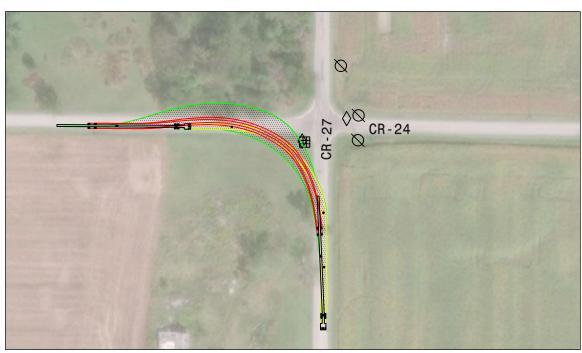

COUNTY ROAD 24 EASTBOUND TO COUNTY ROAD 27 SOUTHBOUND

ROAD SIGN

<u>LEGEND</u>

NOTE: TURNING MOVEMENTS BASED ON LIMITED FIELD SURVEY DATA AND AERIAL IMAGERY. ALL TURNING MOVEMENTS TO BE VERIFIED PRIOR TO ROAD IMPROVEMENT DESIGN.

 □
 UTILITY POLE
 ■ CATCH BASIN

 □
 UTILITY BOX
 — FRONT TIRE PATH

 △
 UNDERGROUND UTILITY MARKER
 — REAR TIRE PATH

 **
 TREE
 — VEHICLE BODY




BROWNFIELDS SHALE OIL & GAS WASTE MANAGEMENT ENVIRONMENTAL ALTERNATIVE ENERGY


© 2016 Hull & Associates, Inc. 6397 Emerald Parkway Phone: (614) 793-8777 Suite 200 Phone: (614) 793-9070 Dublin, Ohio 43016 www.hullinc.com PHASE I TRANSPORTATION STUDY APEX CLEAN ENERGY, INC.

TURNING MOVEMENTS FIGURE 16

PROPOSED REPUBLIC WIND PROJECT SANDUSKY AND SENECA COUNTIES, OHIO

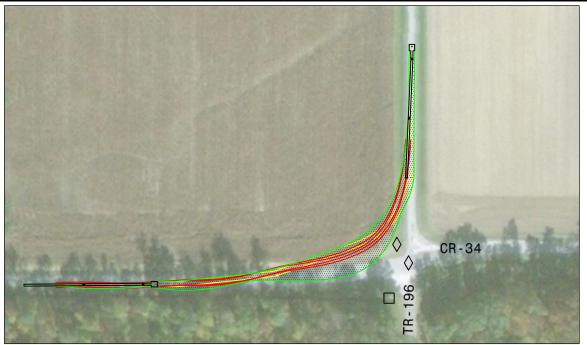

COUNTY ROAD 24 EASTBOUND TO TOWNSHIP ROAD 183 NORTHBOUND

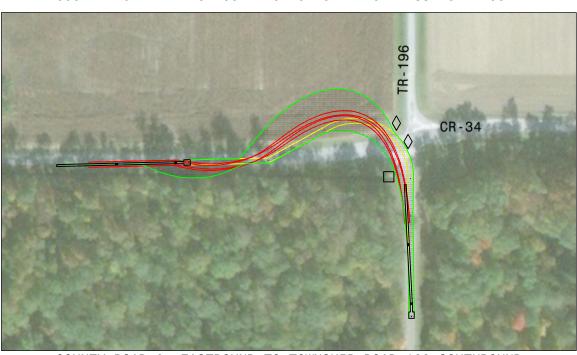

COUNTY ROAD 24 EASTBOUND TO TOWNSHIP ROAD 183 SOUTHBOUND

ROAD SIGN

NOTE: TURNING MOVEMENTS BASED ON LIMITED FIELD SURVEY DATA AND AERIAL IMAGERY. ALL TURNING MOVEMENTS TO BE VERIFIED PRIOR TO ROAD IMPROVEMENT DESIGN.

W UTILITY POLE ■ CATCH BASIN □ UTILITY BOX — FRONT TIRE PATH △ UNDERGROUND UTILITY MARKER — REAR TIRE PATH ★ TREE VEHICLE BODY

LEGEND

HULL

BROWNFIELDS SHALE OIL & GAS WASTE MANAGEMENT ENVIRONMENTAL ALTERNATIVE ENERGY

© 2016 Hull & Associates, Inc. 6397 Emerald Parkway Phone: (614) 793-8777 Suite 200 Fax: (614) 793-9070 Dublin, Ohio 43016 www.hullinc.com PHASE I TRANSPORTATION STUDY
APEX CLEAN ENERGY, INC.
TUDNING MOVEMENTS

TURNING MOVEMENTS FIGURE 17

PROPOSED REPUBLIC WIND PROJECT SANDUSKY AND SENECA COUNTIES, OHIO



STATE ROUTE 18 SOUTHBOUND TO COUNTY ROAD 21 SOUTHBOUND



COUNTY ROAD 21 SOUTHBOUND TO COUNTY ROAD 24 EASTBOUND

\(\text{\Quad UTILITY POLE} \)
\(\text{\Quad UTILITY POLE} \)
\(\text{\Quad UTILITY BOX} \)
\(\text{\Quad UTILITY BOX} \)
\(\text{\Quad UTILITY BOX} \)
\(\text{\Quad UTILITY MARKER} \)
\(\text{\Quad UNDERGROUND UTILITY MARKER} \)
\(\text{\Quad PEAR TIRE PATH MARKER} \)
\(\text{\Quad POAD SIGN} \)
\(\text{\Quad POAD SIGN} \)



BROWNFIELDS SHALE OIL & GAS WASTE MANAGEMENT ENVIRONMENTAL ALTERNATIVE ENERGY


© 2016 Hull & Associates, Inc. 6397 Emerald Parkway Phone: (614) 793-8777 Suite 200 Fax: (614) 793-9070 Dublin, Ohio 43016 www.hullinc.com PHASE I TRANSPORTATION STUDY APEX CLEAN ENERGY, INC.

TURNING MOVEMENTS FIGURE 18

PROJECT NO.: ACXOO3	SUBMITTAL DATE:	DECEMBER 2017
CAD DWG FILE: ACX003.300.0001	PLOT DATE:	12/18/2017



TOWNSHIP ROAD 77 SOUTHBOUND TO TOWNSHIP ROAD 124 WESTBOUND

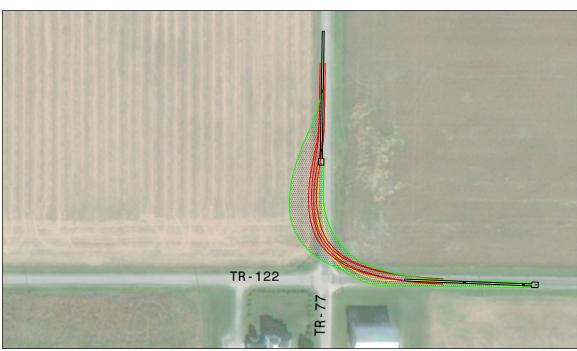

TOWNSHIP ROAD 77 SOUTHBOUND TO TOWNSHIP ROAD 122 EASTBOUND

<u>LEGEND</u>

\(\text{\Quad UTILITY POLE} \)
\(\text{\Quad UTILITY POLE} \)
\(\text{\Quad UTILITY BOX} \)
\(\text{\Quad UTILITY BOX} \)
\(\text{\Quad UTILITY BOX} \)
\(\text{\Quad UTILITY MARKER} \)
\(\text{\Quad UNDERGROUND UTILITY MARKER} \)
\(\text{\Quad PEAR TIRE PATH MARKER} \)
\(\text{\Quad POAD SIGN} \)
\(\text{\Quad POAD SIGN} \)




BROWNFIELDS SHALE OIL & GAS WASTE MANAGEMENT ENVIRONMENTAL ALTERNATIVE ENERGY


© 2016 Hull & Associates, Inc. 6397 Emerald Parkway Phone: (614) 793-8777 Suite 200 Phone: (614) 793-9070 Dublin, Ohio 43016 www.hullinc.com PHASE I TRANSPORTATION STUDY APEX CLEAN ENERGY, INC.

TURNING MOVEMENTS FIGURE 19

PROJECT NO.: ACXOO3	SUBMITTAL DATE:	DECEMBER 2017
CAD DWG FILE: ACX003.300.0001	PLOT DATE:	12/18/2017

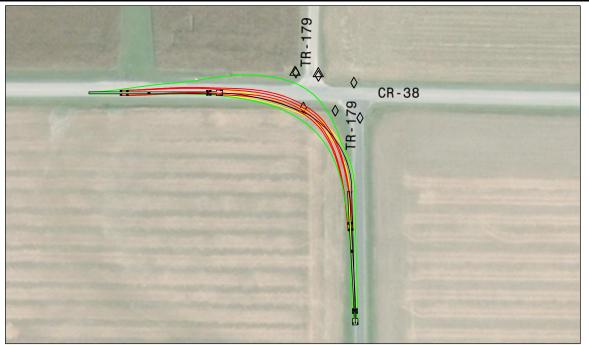

COUNTY ROAD 38 EASTBOUND TO TOWNSHIP ROAD 179

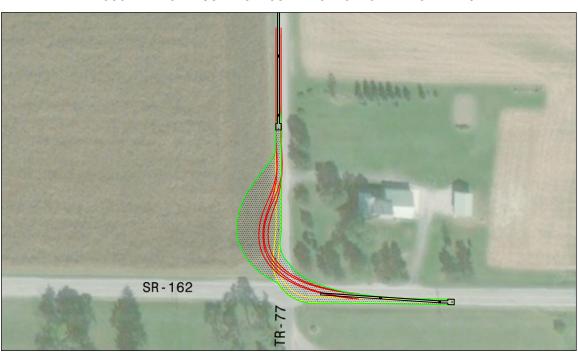

TOWNSHIP ROAD 77 SOUTHBOUND TO STATE ROUTE 162 EASTBOUND

\(\text{\Quad UTILITY POLE} \)
\(\text{\Quad UTILITY POLE} \)
\(\text{\Quad UTILITY BOX} \)
\(\text{\Quad UTILITY BOX} \)
\(\text{\Quad UTILITY BOX} \)
\(\text{\Quad UTILITY MARKER} \)
\(\text{\Quad UNDERGROUND UTILITY MARKER} \)
\(\text{\Quad PEAR TIRE PATH MARKER} \)
\(\text{\Quad POAD SIGN} \)
\(\text{\Quad POAD SIGN} \)



BROWNFIELDS SHALE OIL & GAS WASTE MANAGEMENT ENVIRONMENTAL ALTERNATIVE ENERGY


© 2016 Hull & Associates, Inc. 6397 Emerald Parkway Phone: (614) 793-8777 Suite 200 Fax: (614) 793-9070 Dublin, Ohio 43016 www.hullinc.com PHASE I TRANSPORTATION STUDY APEX CLEAN ENERGY, INC.

TURNING MOVEMENTS FIGURE 20

PROJECT NO.: ACXOO3	SUBMITTAL DATE:	DECEMBER 2017
CAD DWG FILE: ACX003.300.0001	PLOT DATE:	12/18/2017



COUNTY ROAD 32 WESTBOUND TO STATE ROUTE 19 SOUTHBOUND

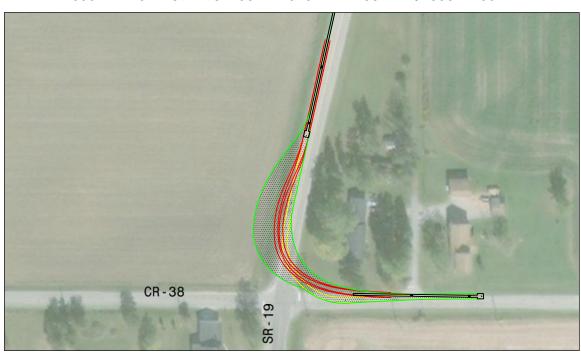

STATE ROUTE 19 SOUTHBOUND TO COUNTY ROAD 38 EASTBOUND

NOTE: TURNING MOVEMENTS BASED ON LIMITED FIELD SURVEY DATA AND AERIAL IMAGERY. ALL TURNING MOVEMENTS TO BE VERIFIED PRIOR TO ROAD IMPROVEMENT DESIGN.

BHULL

BROWNFIELDS SHALE OIL & GAS WASTE MANAGEMENT ENVIRONMENTAL ALTERNATIVE ENERGY


© 2016 Hull & Associates, Inc. 6397 Emerald Parkway Phone: (614) 793-8777 Suite 200 Fax: (614) 793-9070 Dublin, Ohio 43016 www.hullinc.com PHASE I TRANSPORTATION STUDY APEX CLEAN ENERGY, INC.

TURNING MOVEMENTS FIGURE 21

PROJECT NO.: ACXOO3	SUBMITTAL DATE:	DECEMBER 2017
CAD DWG FILE: ACX003.300.0001	PLOT DATE:	12/18/2017



STATE ROUTE 19 SOUTHBOUND TO TOWNSHIP ROAD 148 EASTBOUND

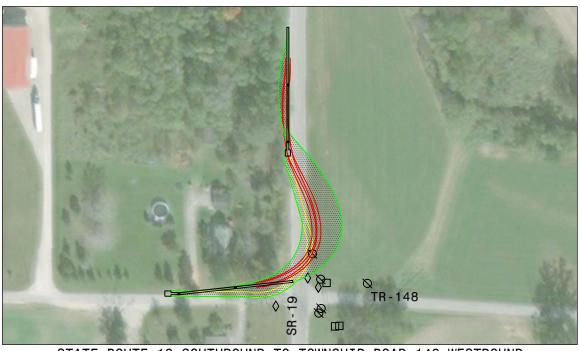

STATE ROUTE 19 SOUTHBOUND TO TOWNSHIP ROAD 148 WESTBOUND

\(\text{\Quad UTILITY POLE} \)
\(\text{\Quad UTILITY POLE} \)
\(\text{\Quad UTILITY BOX} \)
\(\text{\Quad UTILITY BOX} \)
\(\text{\Quad UTILITY BOX} \)
\(\text{\Quad UTILITY MARKER} \)
\(\text{\Quad UNDERGROUND UTILITY MARKER} \)
\(\text{\Quad PEAR TIRE PATH MARKER} \)
\(\text{\Quad POAD SIGN} \)
\(\text{\Quad POAD SIGN} \)




BROWNFIELDS SHALE OIL & GAS WASTE MANAGEMENT ENVIRONMENTAL ALTERNATIVE ENERGY

© 2016 Hull & Associates, Inc. 6397 Emerald Parkway Phone: (614) 793-8777 Suite 200 Fax: (614) 793-9070 Dublin, Ohio 43016 www.hullinc.com PHASE I TRANSPORTATION STUDY APEX CLEAN ENERGY, INC.

TURNING MOVEMENTS FIGURE 22

PROJECT NO.: ACXOO3	SUBMITTAL DATE:	DECEMBER 2017
CAD DWG FILE: ACX003.300.0001	PLOT DATE:	12/18/2017

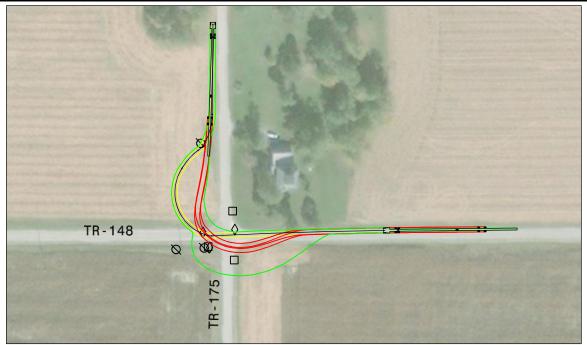

TOWNSHIP ROAD 148 WESTBOUND TO TOWNSHIP ROAD 175 NORTHBOUND



TOWNSHIP ROAD 148 WESTBOUND TO TOWNSHIP ROAD 175 SOUTHBOUND

NOTE: TURNING MOVEMENTS BASED ON LIMITED FIELD SURVEY DATA AND AERIAL IMAGERY. ALL TURNING MOVEMENTS TO BE VERIFIED PRIOR TO ROAD IMPROVEMENT DESIGN.

LEGEND □ UTILITY POLE □ UTILITY BOX □ UNDERGROUND UTILITY MARKER ** TREE □ VEHICLE BODY ○ ROAD SIGN

HULL

BROWNFIELDS SHALE OIL & GAS WASTE MANAGEMENT ENVIRONMENTAL ALTERNATIVE ENERGY

© 2016 Hull & Associates, Inc. 6397 Emerald Parkway Phone: (614) 793-8777 Suite 200 Fax: (614) 793-9070 Dublin, Ohio 43016 www.hullinc.com PHASE I TRANSPORTATION STUDY APEX CLEAN ENERGY, INC.

TURNING MOVEMENTS FIGURE 23

PROJECT NO.: ACXOO3	SUBMITTAL DATE:	DECEMBER 2017
CAD DWG FILE: ACX003.300.0001	PLOT DATE:	12/18/2017



STATE ROUTE 19 SOUTHBOUND TO TOWNSHIP ROAD 138 EASTBOUND



STATE ROUTE 19 SOUTHBOUND TO TOWNSHIP ROAD 138 WESTBOUND

Ø

LEGEND

□ UTILITY BOX □

NOTE: TURNING MOVEMENTS BASED ON LIMITED

FIELD SURVEY DATA AND AERIAL IMAGERY. ALL

TURNING MOVEMENTS TO BE VERIFIED PRIOR TO

ROAD IMPROVEMENT DESIGN.

□ UTILITY BOX

UNDERGROUND UTILITY MARKER

▼ TREE

□ POAD GION

REAR TIRE PATH
VEHICLE BODY

CATCH BASIN

FRONT TIRE PATH

♦ ROAD SIGN

UTILITY POLE


BROWNFIELDS SHALE OIL & GAS WASTE MANAGEMENT ENVIRONMENTAL ALTERNATIVE ENERGY

© 2016 Hull & Associates, Inc. 6397 Emerald Parkway Phone: (614) 793-8777 Suite 200 Fax: (614) 793-9070 Dublin, Ohio 43016 www.hullinc.com PHASE I TRANSPORTATION STUDY APEX CLEAN ENERGY, INC.


 \blacksquare

TURNING MOVEMENTS FIGURE 24

PROPOSED REPUBLIC WIND PROJECT SANDUSKY AND SENECA COUNTIES, OHIO

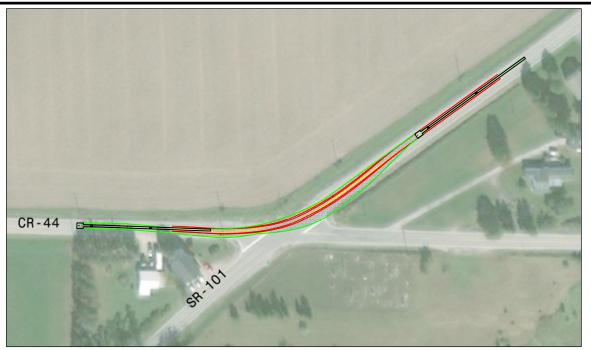

STATE ROUTE 101 SOUTHBOUND TO COUNTY ROAD 44 WESTBOUND

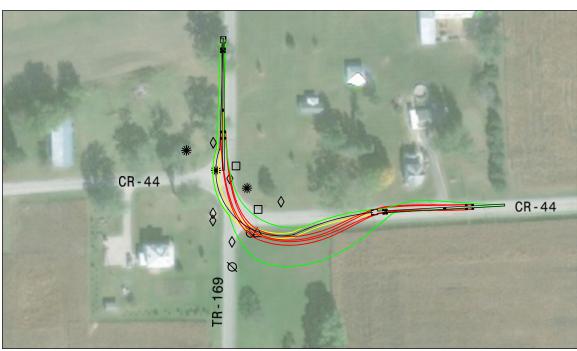

COUNTY ROAD 44 WESTBOUND TO TOWNSHIP ROAD 169 NORTHBOUND

NOTE: TURNING MOVEMENTS BASED ON LIMITED FIELD SURVEY DATA AND AERIAL IMAGERY. ALL TURNING MOVEMENTS TO BE VERIFIED PRIOR TO ROAD IMPROVEMENT DESIGN.

LEGEND


BHULL

BROWNFIELDS SHALE OIL & GAS WASTE MANAGEMENT ENVIRONMENTAL ALTERNATIVE ENERGY


© 2016 Hull & Associates, Inc. 6397 Emerald Parkway Phone: (614) 793-8777 Suite 200 Fax: (614) 793-9070 Dublin, Ohio 43016 www.hullinc.com PHASE I TRANSPORTATION STUDY APEX CLEAN ENERGY, INC.

TURNING MOVEMENTS FIGURE 25

PROPOSED REPUBLIC WIND PROJECT SANDUSKY AND SENECA COUNTIES, OHIO

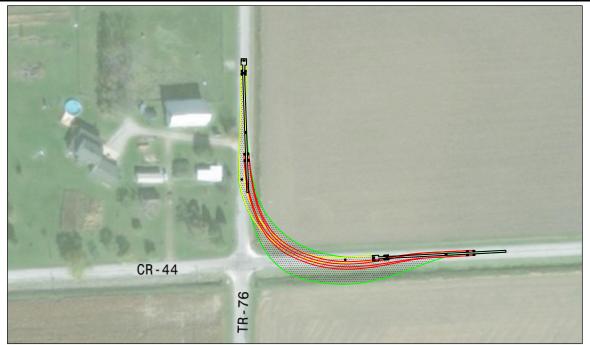

COUNTY ROAD 44 WESTBOUND TO TOWNSHIP ROAD 76 NORTHBOUND

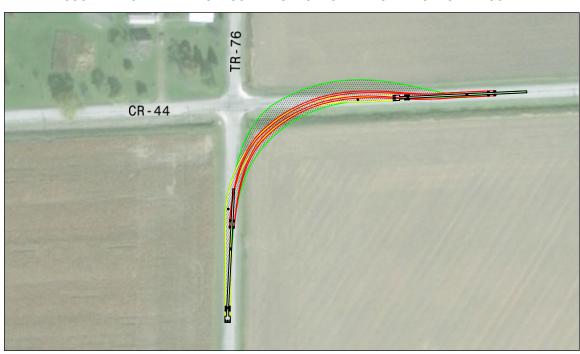

COUNTY ROAD 44 WESTBOUND TO TOWNSHIP ROAD 76 SOUTHBOUND

\(\text{\Quad UTILITY POLE} \)
\(\text{\Quad UTILITY POLE} \)
\(\text{\Quad UTILITY BOX} \)
\(\text{\Quad UTILITY BOX} \)
\(\text{\Quad UTILITY BOX} \)
\(\text{\Quad UTILITY MARKER} \)
\(\text{\Quad UNDERGROUND UTILITY MARKER} \)
\(\text{\Quad PEAR TIRE PATH MARKER} \)
\(\text{\Quad POAD SIGN} \)
\(\text{\Quad POAD SIGN} \)




BROWNFIELDS SHALE OIL & GAS WASTE MANAGEMENT ENVIRONMENTAL ALTERNATIVE ENERGY

© 2016 Hull & Associates, Inc. 6397 Emerald Parkway Phone: (614) 793-8777 Suite 200 Fax: (614) 793-9070 Dublin, Ohio 43016 www.hullinc.com PHASE I TRANSPORTATION STUDY APEX CLEAN ENERGY, INC.

TURNING MOVEMENTS FIGURE 26

PROJECT NO.: ACXOO3	SUBMITTAL DATE:	DECEMBER 2017
CAD DWG FILE: ACX003.300.0001	PLOT DATE:	12/18/2017

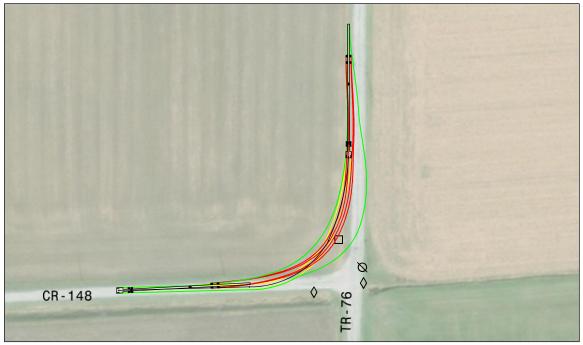

COUNTY ROAD 44 WESTBOUND TO TOWNSHIP ROAD 76 NORTHBOUND

COUNTY ROAD 44 WESTBOUND TO TOWNSHIP ROAD 76 SOUTHBOUND

ROAD SIGN

LEGEND

NOTE: TURNING MOVEMENTS BASED ON LIMITED FIELD SURVEY DATA AND AERIAL IMAGERY. ALL TURNING MOVEMENTS TO BE VERIFIED PRIOR TO ROAD IMPROVEMENT DESIGN.

Ø	UTILITY POLE	=	CATCH BASIN
	UTILITY BOX		FRONT TIRE PATH
\triangle	UNDERGROUND UTILITY MARKER		REAR TIRE PATH
*	TREE		VEHICLE BODY


BHULL

BROWNFIELDS SHALE OIL & GAS WASTE MANAGEMENT ENVIRONMENTAL ALTERNATIVE ENERGY


© 2016 Hull & Associates, Inc. 6397 Emerald Parkway Phone: (614) 793-8777 Suite 200 Fax: (614) 793-9070 Dublin, Ohio 43016 www.hullinc.com PHASE I TRANSPORTATION STUDY APEX CLEAN ENERGY, INC.

TURNING MOVEMENTS FIGURE 27

PROJECT NO.: ACXOO3	SUBMITTAL DATE:	DECEMBER 2017
CAD DWG FILE: ACX003.300.0001	PLOT DATE:	12/18/2017

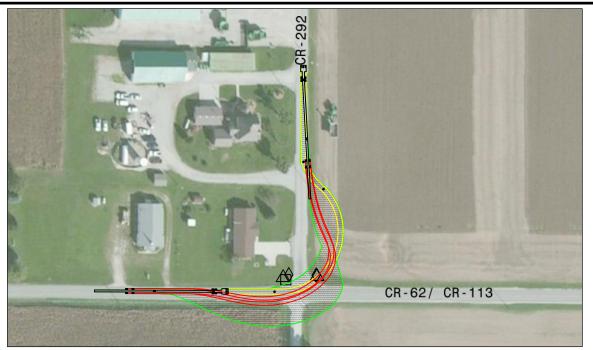

COUNTY ROAD 113/ COUNTY ROAD 62 EASTBOUND TO TOWNSHIP ROAD 81 NORTHBOUND

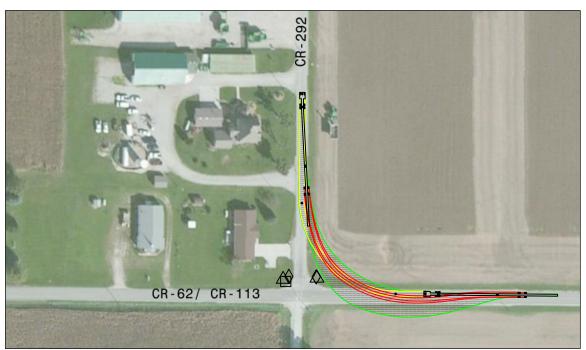

COUNTY ROAD 113/ COUNTY ROAD 62 WESTBOUND TO TOWNSHIP ROAD 81 NORTHBOUND LEGEND

ROAD SIGN

NOTE: TURNING MOVEMENTS BASED ON LIMITED FIELD SURVEY DATA AND AERIAL IMAGERY. ALL TURNING MOVEMENTS TO BE VERIFIED PRIOR TO ROAD IMPROVEMENT DESIGN.

□
UTILITY POLE
■
CATCH BASIN

□
UTILITY BOX
FRONT TIRE PATH

△
UNDERGROUND UTILITY MARKER
REAR TIRE PATH

**
TREE
VEHICLE BODY

BROWNFIELDS SHALE OIL & GAS WASTE MANAGEMENT ENVIRONMENTAL ALTERNATIVE ENERGY


© 2016 Hull & Associates, Inc. 6397 Emerald Parkway Phone: (614) 793-8777 Suite 200 Phone: (614) 793-9070 Dublin, Ohio 43016 www.hullinc.com PHASE I TRANSPORTATION STUDY APEX CLEAN ENERGY, INC.

TURNING MOVEMENTS FIGURE 28

PROJECT NO.: ACXOO3	SUBMITTAL DATE:	DECEMBER 2017
CAD DWG FILE: ACX003.300.0001	PLOT DATE:	12/18/2017


APPENDIX A


Truck Profiles

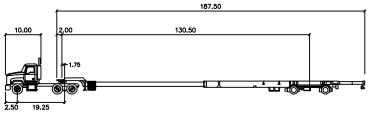

55 Meter Wind Blade L feet


Tractor Width Trailer Width Tractor Track Trailor Track Lock to Lock Time Steering Angle Articulating Angle : 8.50 : 3.00 : 8.00 : 8.00 : 12.0 : 40.0 : 90.0

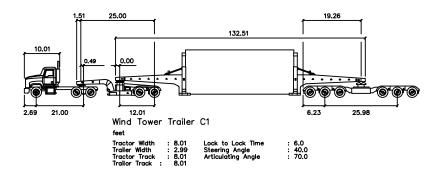

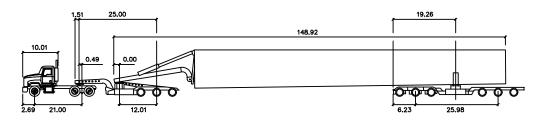

Wind Tower Trailer B1

First Unit Width Trailer Width First Unit Track Trailer Track Lock to Lock Time Steering Angle Articulating Angle

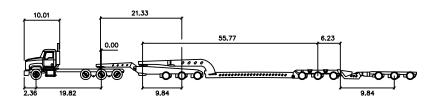

Booster Trailer C6 feet

First Unit Width Trailer Width First Unit Track Trailer Track Lock to Lock Time Steering Angle Articulating Angle



SHALE OIL & GAS WASTE MANAGEMENT ENVIRONMENTAL ALTERNATIVE ENERGY

© 2016 Hull & Associates, Inc. 6397 Emerald Parkway Phone: (614) 793-8777 Suite 200 Dublin, Ohio 43016 Phone: (614) 793-9070 www.hullinc.com

PHASE I TRANSPORTATION STUDY APEX CLEAN ENERGY, INC.

APPENDIX A TRUCK PROFILES

PROJECT N	١٠.١	ACX003		SUBMITTAL DATE:	DECEMBER 2017
CAD DWG F	FILE:	ACX003.300.0001_FIGS	3-	1176LGT 2000AT7E:	12/15/2017

APPENDIX B

ODOT Special Hauling Permit Fees & Application



OHIO DEPARTMENT OF TRANSPORTATION

SPECIAL HAULING PERMIT SECTION 1980 WEST BROAD ST., MAIL STOP 5140 COLUMBUS, OHIO 43223 TELEPHONE (614) 351-2300 FACSIMILE (614) 728-4099

www.dot.state.oh.us/permits

SPECIAL HAULING PERMIT FEE SCHEDULE

(Per Ohio Administrative Code 5501:2-1-10)

Effective January 27, 2014

PERMIT TYPE		UTINE DIMENSIONS	SUPERLOAD WEIGHTS / DIMENSIONS Over 120,000 lbs; Over 14' wide or Over 14'6" high						
	One Way	& Return	One Way	& Return					
SINGLE TRIP									
OS Only	\$65	\$100	\$135	\$200					
OS/OW	\$135	\$200	\$135	+ TM** \$200	+ TM**				
Steel/Aluminum Coil	\$65	N/A*	N/A*	N/A*					
Multi-State OS Only	\$65	N/A*	N/A*	N/A*					
Multi-State OS/OW	\$135	N/A*	N/A*	N/A*					
Emergency	\$250	\$365	N/A*	N/A*					
CONTINUING (90 DAY)									
OS Only	\$250	\$375	N/A*	N/A*					
OS/OW	\$500	\$750	N/A*	N/A*					
Steel/Aluminum Coil	\$125	N/A*	N/A*	N/A*					
Michigan Legal	\$125	\$125	\$165	\$165					
International Sealed Container	\$500	N/A*	N/A*	N/A*					
CONTINUING ANNUAL (365 DA	Y)								
OS Only	 \$970	\$1,170	N/A*	N/A*					
OS/OW	\$1,970	\$2,970	N/A*	N/A*					
Steel/Aluminum Coil	\$470	N/A*	N/A*	N/A*					
Michigan Legal	\$470	\$470	\$630	\$630					
Continuing (45 Day)									
International Sealed Container	\$250	N/A*	N/A*	N/A*					
BLANKET PERMITS (365 DAY)									
Boat	\$100	Included	N/A*	N/A*					
Construction Equipment	\$100	Included	N/A*	N/A*					
Farm Equipment	\$100	Included	N/A*	N/A*					
Manufactured Building	\$100	Included	N/A*	N/A*					
Marina	\$100	Included	N/A*	N/A*					
REVISIONS***									
All Permits	\$10	\$10	\$50	\$50					

^{***} If what is being revised will change the price of the original permit, a new permit must be obtained.

^{*} N/A - Not Available

^{**} TM - Ton Mile = [(GVW - 120,000)/2000] times \$0.04 per mile travelled

OS-1 Ohio Department of Transportation

Mail Special Hauling Permit Section

or 1980 West Broad Street, Mail Stop 5140

Deliver Columbus, OH 43223 To Telephone: 614-351-2300

We do not accept faxed applications





Applicant Nam			nsured (of Veh												
Address (Mailing)							Application Date								
City State					Zip Code			Area Code/Telephone Number							
Person Requesting Permit					DOT Number										
All Weights Legal? Yes Various Tra			ailers?	Yes	Conveyance: L			Lo	padedTowed			Self-Propelled			
Vehicle Information No. Make Axles		License Number		State Length E		Em	mpty Weight		Width He		ght				
Power Unit Trailer 1 Trailer 2 Trailer 3															
Load Informa	d Information Make (if applicable) Load		Model (if applicable)		Len	gth Width		dth	Height		١	Weight			
Load Descrip Overall Vehicle Length			ght	Weight		ront rhang	Rea Overh			Deck Height Minimum of Trailer Underclearance				Max Trailer Width	
Total Number	of Axles	:=		COMPLET	E ONL Y	' IF OVEI	RWEIGH	IT (Ple	ase use	e an OS	-1W if	more th	an 9 ax	les)	
Load (Axle Wei	Axle 1 (Front) Axle 2 Weights)		Axle 3 Ax		de 4	de 4 Axle 5		Axl	Axle 6 Ax		e 7 Axle 8		8 :	Axle 9	
Number of T															
Spacing Bet	ween Axl	es			OUTIN	C INFOR	MATION	.,		I.					
FROM (Location, Municipality, State) TO (Location, Municipality, State)															
VIA HIGHWAY ROADS															
-															
Comments:															
Desired Effect	ive Date	:		Permit Trans	smittal:	Fax Nu		Fax	,		Mail	_		Pick-U _l)
TYPE PERMIT	: (check	only one)	BLANKET:	REVI	SION	Fee \$		Cash		Pai	d By:	Check /			Account**
SINGLE TRIP: Trip Round			Boat Const	ruction Equipn Equipment factured Buildii			d Type:		Card** (Visa			Applies			Discover
	· & Returi	n (N/A for Ste	Marin			E	xpiration	Date:		/	ldor Ci	anatura		Code: (If a	applicable)
365 Day 365-Day & Return (N/A for Steel Coil or MI Legal Weight)					Card Holder Signature * Make checks payable to: Treasurer of State c/o ODOT ** ODOT's Columbus Special Hauling Permit Office Only										

This foregoing document was electronically filed with the Public Utilities

Commission of Ohio Docketing Information System on

2/2/2018 1:11:33 PM

in

Case No(s). 17-2295-EL-BGN

Summary: Application Exhibit E electronically filed by Teresa Orahood on behalf of Sally W. Bloomfield