



Legal Department

October 9, 2018

Chairman Asim Z. Haque
Public Utilities Commission of Ohio
180 East Broad Street
Columbus, OH 43215-3793

Re: In the Matter of the Application of)
The Ohio State University)
and Ohio Power Company) Case No. 18-1040-EL-EEC
for Approval of a Special Arrangement)
Agreement with a Mercantile Customer)

Tanner Wolfram
Legal Fellow
Regulatory Services
(614) 716-2914 (T)
(614) 716-2950 (F)
tswolfram@aep.com

Dear Chairman Haque,

Attached please find the Joint Application of Ohio Power Company (AEP Ohio) and the above-referenced mercantile customer for approval of a Special Arrangement of the commitment of energy efficiency/peak demand reduction (EE/PDR) resources toward compliance with the statutory benchmarks for 2018 (hereinafter "Joint Application").

Amended Substitute Senate Bill 221, codified at R.C. 4928.66, sets forth EE/PDR benchmarks that electric distribution utilities are required to meet or exceed. The statute allows utilities to include EE/PDR resources committed by mercantile customers for integration into the utilities' programs to be counted toward compliance with a utility's EE/PDR benchmarks. The statute also enables the Commission to approve special arrangements for mercantile customers that commit EE/PDR resources to be counted toward compliance with EE/PDR benchmarks.

The Commission's Order in Case No. 10-834-EL-EEC established a streamlined process to expedite review of these special arrangements by developing a sample application process for parties to follow for consideration of such programs implemented during the prior three calendar years. The attached Joint Application and affidavit conforms with AEP Ohio's version of the streamlined sample application. As requested by Commission Staff, any confidential information referenced in the Joint Application has been provided confidentially to Commission Staff for filing in Commission Docket 10-1599-EL-EEC and subject to the confidentially protections of R.C. 4901.16 and OAC 4901-1-24(E). AEP Ohio respectfully requests that the Commission treat the two cases as associated dockets and that any confidential information provided to Staff for filing in connection with the Joint Application be subject to the protective order requested in Docket 10-1599-EL-EEC.

Cordially,

/s/ Tanner Wolfram
Tanner Wolfram

Attachments



Public Utilities Commission

Application to Commit Energy Efficiency/Peak Demand Reduction Programs (Mercantile Customers Only)

Case No.: 18-1040-EL-EEC

Mercantile Customer: THE OHIO STATE UNIVERSITY

Electric Utility: Ohio Power

Program Title or Description: AEP Ohio Business Incentives for Energy Efficiency: Self Direct Program

Rule 4901:1-39-05(F), Ohio Administrative Code (O.A.C.), permits a mercantile customer to file, either individually or jointly with an electric utility, an application to commit the customer's existing demand reduction, demand response, and energy efficiency programs for integration with the electric utility's programs. The following application form is to be used by mercantile customers, either individually or jointly with their electric utility, to apply for commitment of such programs in accordance with the Commission's pilot program established in Case No. [10-834-EL-POR](#)

Completed applications requesting the cash rebate reasonable arrangement option (Option 1) in lieu of an exemption from the electric utility's energy efficiency and demand reduction (EEDR) rider will be automatically approved on the sixty-first calendar day after filing, unless the Commission, or an attorney examiner, suspends or denies the application prior to that time. Completed applications requesting the exemption from the EEDR rider (Option 2) will also qualify for the 60-day automatic approval so long as the exemption period does not exceed 24 months. Rider exemptions for periods of more than 24 months will be reviewed by the Commission Staff and are only approved up the issuance of a Commission order.

Complete a separate application for each customer program. Projects undertaken by a customer as a single program at a single location or at various locations within the same service territory should be submitted together as a single program filing, when possible. Check all boxes that are applicable to your program. For each box checked, be sure to complete all subparts of the question, and provide all requested additional information. Submittal of incomplete applications may result in a suspension of the automatic approval process or denial of the application.

Any confidential or trade secret information may be submitted to Staff on disc or via email at ee-pdr@puc.state.oh.us.

Section 1: Company Information

Name: THE OHIO STATE UNIVERSITY

Principal address: 2003 Millikin Rd, Columbus, Oh 43210

Address of facility for which this energy efficiency program applies: 1735 Cannon Dr, Columbus, Oh 43210

Name and telephone number for responses to questions:

John Rappleye, The Ohio State University, (614) 292-6240

Electricity use by the customer (check the box(es) that apply):

- ☒ The customer uses more than seven hundred thousand kilowatt hours per year at our facility. (Please attach documentation.)

See Confidential and Proprietary Attachment 4 - Calculation of Rider Exemption and UCT which provides the facility consumption for the last three years, benchmark kWh, and the last 12 months usage.

- ☐ The customer is part of a national account involving multiple facilities in one or more states. (Please attach documentation.) When checked, see Attachment 6 - Supporting Documentation for a listing of the customer's name and service addresses of other accounts in the AEP Ohio service territory.

Section 2: Application Information

A) The customer is filing this application (choose which applies):

- ☐ Individually, on our own.
- ☒ Jointly with our electric utility.

B) Our electric utility is: Ohio Power Company

The application to participate in the electric utility energy efficiency program is
"Confidential and Proprietary Attachment 3 - Self Direct Program Project
Completed Application."

C) The customer is offering to commit (choose which applies):

- ☐ Energy savings from our energy efficiency program. (Complete Sections 3, 5, 6, and 7.)
- ☐ Capacity savings from the customer's demand response/demand reduction program. (Complete Sections 4, 5, 6, and 7.)
- ☒ Both the energy savings and the demand reduction from the customer's energy efficiency program. (Complete all sections of the Application.)

Section 3: Energy Efficiency Programs

A) The customer's energy efficiency program involves (choose whichever applies):

- ☐ Early replacement of fully functioning equipment with new equipment. (Provide the date on which the customer replaced fully functioning equipment, and the date on which the customer would have replaced such equipment if it had not been replaced early. Please include a brief explanation for how the customer determined this future replacement date (or, if not known, please explain why this is not known)).
- ☐ Installation of new equipment to replace equipment that needed to be replaced. The customer installed new equipment on the following date(s):
- ☒ Installation of new equipment for new construction or facility expansion. The customer installed new equipment on the following date(s): 8/1/2016
- ☐ Behavioral or operational improvement.

B) Energy savings achieved/to be achieved by your energy efficiency program:

- 1) If you checked the box indicating that your project involves the early replacement of fully functioning equipment replaced with new equipment, then calculate the annual savings [(kWh used by the original equipment) - (kWh used by new equipment) = (kWh per year saved)]. Please attach your calculations and record the results below:

Annual savings: kWh

- 2) If you checked the box indicating that you installed new equipment to replace equipment that needed to be replaced, then calculate the annual savings [(kWh used by less efficient new equipment) - (kWh used by the higher efficiency new equipment) = (kWh per year saved)]. Please attach your calculations and record the results below:

Annual savings: kWh

Please describe the less efficient new equipment that you rejected in favor of the more efficient new equipment.

- 3) If you checked the box indicating that your project involves equipment for new construction or facility expansion, then calculate the annual savings [(kWh used by less efficient new equipment) - (kWh used by higher efficiency new equipment) = (kWh per year saved)]. Please attach your calculations and record the results below:

Unit Quantity (watts) = Existing (watts x units) - Installed (watts x units)

kWh Reduction (Annual Savings) = Unit Quantity x (Deemed kWh/Unit)

Annual savings: 146,510 kWh

See Confidential and Proprietary Attachment 5 – Self Direct Program Project Calculation for annual energy savings calculations and 10-1599-EL-EEC for the work papers that provide all methodologies, protocols, and practices used in this application for prescriptive measures, as needed.

Please describe the less efficient new equipment that you rejected in favor of the more efficient new equipment.

The less efficient new equipment is the minimum required by Ohio State code or Federal Standard whichever is more stringent. For those measures where no code applies the baseline equipment is assumed to be the least efficient equipment available in the marketplace or standard practice, whichever results in the most conservative annual savings. Any information available describing the less efficient new equipment option is provided in 10-1599-EL-EEC for the work papers that provide all methodologies, protocols, and practices used in this application for prescriptive measures.

- 4) If you checked the box indicating that the project involves behavioral or operational improvements, provide a description of how the annual savings were determined.

Section 4: Demand Reduction/Demand Response Programs

A) The customer's program involves (check the one that applies)::

☒ Coincident peak-demand savings from the customer's energy efficiency program.

☐ Actual peak-demand reduction. (Attach a description and documentation of the peak-demand reduction.)

☐ Potential peak-demand reduction (choose which applies):

➤ Choose one or more of the following that applies:

☐ The customer's peak-demand reduction program meets the requirements to be counted as a capacity resource under a tariff of a regional transmission organization (RTO) approved by the Federal Energy Regulatory Commission.

☐ The customer's peak-demand reduction program meets the requirements to be counted as a capacity resource under a program that is equivalent to an RTO program, which has been approved by the Public Utilities Commission of Ohio.

B) On what date did the customer initiate its demand reduction program?

The coincident peak-demand savings are permanent installations that reduce demand through energy efficiency and were installed on the date specified in Section 3 A above.

C) What is the peak demand reduction achieved or capable of being achieved (show calculations through which this was determined):

Unit Quantity (watts) = Existing (watts x units) - Installed (watts x units)

KW Demand Reduction = Unit Quantity (watts) x (Deemed KW/Unit (watts))

32.9 kW

See Confidential and Proprietary Attachment 5 - Self Direct Program Project Calculation for peak demand reduction calculation, and 10-1599-EL-EEC for the work papers that provide all methodologies, protocols, and practices used in this application for prescriptive measures, as needed.

Section 5: Request for Cash Rebate Reasonable Arrangement (Option 1) or Exemption from Rider (Option 2)

Under this section, check the box that applies and fill in all blanks relating to that choice.

Note: If Option 2 is selected, the application will not qualify for the 60-day automatic approval. All applications, however, will be considered on a timely basis by the Commission.

A) The customer is applying for:

☒ Option 1: A cash rebate reasonable arrangement.

OR

☐ Option 2: An exemption from the cost recovery mechanism implemented by the electric utility.

OR

☐ Commitment payment

B) The value of the option that the customer is seeking is:

Option 1: A cash rebate reasonable arrangement, which is the lesser of (show both amounts):

☒ A cash rebate of \$ 11,339.10. (Rebate shall not exceed 50% project cost. Attach documentation showing the methodology used to determine the cash rebate value and calculations showing how this payment amount was determined.)

See Confidential and Proprietary Attachment 5 – Self Direct Program Project Calculation for incentive calculations for this mercantile program.

Option 2: An exemption from payment of the electric utility's energy efficiency/peak demand reduction rider.

☐ An exemption from payment of the electric utility's energy efficiency/peak demand reduction rider for ____ months (not to exceed 24 months). (Attach calculations showing how this time period was determined.)

OR

- ☐ A commitment payment valued at no more than \$_____. (Attach documentation and calculations showing how this payment amount was determined.)

OR

- ☐ Ongoing exemption from payment of the electric utility's energy efficiency/peak demand reduction rider for an initial period of 24 months because this program is part of an ongoing efficiency program that is practiced by our organization. (Attach documentation that establishes your organization's ongoing efficiency program. In order to continue the exemption beyond the initial 24 month period your organization will need to provide a future application establishing additional energy savings and the continuance of the organization's energy efficiency program.)

Section 6: Cost Effectiveness

The program is cost effective because it has a benefit/cost ratio greater than 1 using the (choose which applies):

- ☐ Total Resource Cost (TRC) Test. The calculated TRC value is: _____
(Continue to Subsection 1, then skip Subsection 2)
- ☒ Utility Cost Test (UCT) . The calculated UCT value is: 4.12 (Skip to Subsection 2.)

Subsection 1: TRC Test Used (please fill in all blanks).

The TRC value of the program is calculated by dividing the value of our avoided supply costs (generation capacity, energy, and any transmission or distribution) by the sum of our program overhead and installation costs and any incremental measure costs paid by either the customer or the electric utility.

The electric utility's avoided supply costs were _____.

Our program costs were _____.

The utility's incremental measure costs were _____.

Subsection 2: UCT Used (please fill in all blanks).

We calculated the UCT value of our program by dividing the value of our avoided supply costs (capacity and energy) by the costs to our electric utility (including administrative costs and incentives paid or rider exemption costs) to obtain our commitment.

Our avoided supply costs were \$ 50,360.41

The utility's program costs were \$ 879.06

The utility's incentive costs/rebate costs were \$ 11,339.10.

Section 7: Additional Information

Please attach the following supporting documentation to this application:

- Narrative description of your program including, but not limited to, make, model, and year of any installed and replaced equipment.

See Attachment 1 - Self Direct Project Overview and Commitment for a description of the project. See Attachment 6 - Supporting Documentation, for the specifications of the replacement equipment 10-1599-EL-EEC for the work papers that provide all methodologies, protocols, and practices used in this application for prescriptive measures, as needed. Due to the length of time since the equipment replacement, the make, model and year of the replaced equipment is not available.

- A copy of the formal declaration or agreement that commits your program to the electric utility, including:

- 1) any confidentiality requirements associated with the agreement;

See Attachment 2 - Self Direct Program Project Blank Application including Rules and Requirements. All confidentiality requirements are pursuant to the Retrospective Projects/Rules and Requirements that are part of the signed application which is provided as Confidential and Proprietary Attachment 3 - Self Direct Program Project Completed Application.)

- 2) a description of any consequences of noncompliance with the terms of the commitment;

See Attachment 2 - Self Direct Program Project Blank Application including Rules and Requirements. All consequences of noncompliance are pursuant to the Retrospective Projects/Rules and Requirements that are part of the signed application which is provided as Confidential and Proprietary Attachment 3 - Self Direct Program Project Completed Application.

- 3) a description of coordination requirements between the customer and the electric utility with regard to peak demand reduction;

None required because the resources committed are permanent installations that reduce demand through increased efficiency during the Company's peak summer demand period generally defined as May through September and do not require specific coordination and communication to provide demand reduction capabilities to the Company.

- 4) permission by the customer to the electric utility and Commission staff and consultants to measure and verify energy savings and/or peak-demand reductions resulting from your program; and,

See Attachment 2 - Self Direct Program Blank Application including Rules and Requirements granting such permission pursuant to the Retrospective Projects/Rules and Requirements that are part of the signed application which is provided as Confidential and Proprietary Attachment 3 - Self Direct Program Project Completed Application.

- 5) a commitment by you to provide an annual report on your energy savings and electric utility peak-demand reductions achieved.

See Attachment 1 - Self Direct Project Overview and Commitment for the commitment to comply with any information and compliance reporting requirements imposed by rule or as part of the approval of this arrangement by the Public Utilities Commission of Ohio.

- A description of all methodologies, protocols, and practices used or proposed to be used in measuring and verifying program results. Additionally, identify and explain all deviations from any program measurement and verification guidelines that may be published by the Commission.

The Company applies the same methodologies, protocols, and practices to Self Direct Program retrospective projects that are screened and submitted for approval as it does to prospective projects submitted through its Prescriptive and Custom Programs. The Commission has not published a technical reference manual for use by the Company so deviations can not be identified. The project submitted is a prescriptive project and energy savings are determined as described in Confidential and Proprietary Attachment 5 - Self Direct Program Project Calculation, and 10-1599-EL-EEC for the work papers that provide all methodologies, protocols, and practices used in this application for prescriptive measures, as needed.



Public Utilities
Commission

Project # 18-22877
Docket # 18-1040

Application to Commit
Energy Efficiency/Peak Demand
Reduction Programs
(Mercantile Customers Only)

Case No.: 18-1040-EL-EEC

State of Ohio :

Nigme Mustafa, Affiant, being duly sworn according to law, deposes and says that:

1. I am the duly authorized representative of:

DNV GL Energy Services USA Inc. agent of Ohio Power

2. I have personally examined all the information contained in the foregoing application, including any exhibits and attachments. Based upon my examination and inquiry of those persons immediately responsible for obtaining the information contained in the application, I believe that the information is true, accurate and complete.

Nigme Mustafa Engineer
Signature of Affiant & Title

Sworn and subscribed before me this 9th day of August, 2018 Month/Year

Linda M. Schmidt
Signature of official administering oath

LINDA M. SCHMIDT
Print Name and Title
Admin. Assistant

My commission expires on 7/31/2022



LINDA M. SCHMIDT
Notary Public, State of Ohio
My Commission Expires 7-31-2022



Self Direct Project Overview & Commitment

The Public Utility Commission of Ohio (PUCO) will soon review your application for participation in AEP Ohio's Energy Efficiency/Peak Demand Response program. Based on your submitted project, please select by initialing one of the two options below, sign and fax to 877-607-0740.

Customer Name	THE OHIO STATE UNIVERSITY	
Project Number	AEP-18-22677	
Customer Premise Address	1735 CANNON DR, COLUMBUS, OH 43210	
Customer Mailing Address	2003 Millikin Rd, Columbus, OH 43210	
Date Received	2/15/2018	
Project Installation Date	8/1/2016	
Annual kWh Reduction	146,510	
Total Project Cost	\$42,836.60	
Unadjusted Energy Efficiency Credit (EEC) Calculation	\$15,118.80	
Simple Payback (yrs)	5.9	
Utility Cost Test (UCT) for EEC	4.12	
Utility Cost Test (UCT) for Exemption	N/A	
<i>Please Choose One Option Below and Initial</i>		
Self Direct EEC: 75%	\$11,339.10	<input checked="" type="checkbox"/> Initial: <i>JR</i>
EE/PDR Rider Exemption	12 Months (with possible extension up to N/A months after PUCO Approval)	<input type="checkbox"/> Initial: N/A

Note: This is a one time selection. By selecting EEC, the customer will receive payment in the amount stated above. Selection of EE/PDR rider exemption, will result in the customer not being eligible to participate in any other energy efficiency programs offered by AEP Ohio during the period of exemption. In addition, the term of EE/PDR rider exemption is subject to ongoing review for compliance and could be changed by the PUCO.

If EEC has been selected, will the Energy Efficiency Funds selected help you move forward with other energy efficiency projects? ☐ YES ☒ NO

Note: Exemptions for periods beyond 24 months are subject to look-back or true-up adjustments every year to ensure that the exemption accurately reflects the EEDR savings. Applicants must file for renewal for any exemption beyond 12 months.

Project Overview:

The Self Direct (Prescriptive and Custom) project that the above has completed and applied is as follows.

The documentation that was included with the application proved that the energy measures applied for were purchased and installed.

By signing this document, the Mercantile customer affirms its intention to commit and integrate the above listed energy efficiency resources into the utility's peak demand reduction, demand response, and energy efficiency programs. By signing, the Mercantile customer also agrees to serve as a joint applicant in any filings necessary to secure approval of this arrangement by the Public Utilities Commission of Ohio, and comply with any information and compliance reporting requirements imposed by rule or as part of that approval.

Columbus Southern Power Company

By: *John J. Will*
Title: Manager
Date: 07/06/2018

THE OHIO STATE UNIVERSITY

By: *John Rappaport*
Title: Energy Programs Manager
Date: July 6, 2018



Application Guidelines

Final Applications must be submitted before November 16, 2018 in order to qualify for incentives identified in this application.

Step 1. Verify Eligibility

- Customer must have a valid AEP Ohio account.
- Equipment/measure must be installed at facilities served by the AEP Ohio account.
- Project must produce permanent reduction in electrical energy use (kWh).
- All installed equipment must meet or exceed the specifications in the application.
- Please see **Efficient Products for Business, Process Efficiency and New Construction Terms and Conditions** or **Self-Direct Terms and Conditions** for program rules and regulations.

Step 2. Complete Applicant Information

- All fields in customer and project information sections must be completed.
- Contractor information must be completed if project is not self-performed.

Step 3. Complete the Incentive Worksheet(s)

- Find and read specifications related to the project.
- Choose the incentive category on the worksheet based on installed equipment and specifications.
- Complete all fields (fixture description, operating hours, etc.) on the related worksheet.

Step 4. Sign Customer Agreement

- Read the Terms and Conditions before signing and submitting the application.
- Sign Pre-Approval Agreement and submit the application to reserve funds.
- Sign Final Application Agreement and submit the application after the project is completed to receive funds.
- Complete Third Party Payment Release Authorization ONLY if incentive payment is to be paid to an entity other than AEP Ohio customer listed on the Applicant Information page.

Step 5. Submit Pre-Approval Application¹

(For Self-Direct applications, skip to Step 6)

- Submitting a Pre-Approval Application to determine qualification and reserve program funds for a project is strongly recommended.
- All process efficiency projects require pre-approval.
- Complete all fields in Pre-Approval Agreement.
- Pre-Approval Application must be submitted with:
 - Proposed scope of work (type and quantity of old and new equipment must be listed)
 - Specification sheets for all proposed equipment
 - W-9 form
- Submit application via email, fax or mail.
- An inspection may be required during application review; applicants requiring inspection will be contacted for scheduling.

Step 6. Submit Final Application

- Complete all fields for Final Application Agreement.
- Update the application if measures/equipment differs from pre-application.
- Final Application must be submitted with:
 - Dated and itemized material invoice
 - External labor invoice (if applicable)
 - If Pre-Approval Application was not submitted, include the documents listed on Step 5
- Submit application via email, fax or mail.
- An inspection may be required during application review; applicants requiring inspection will be contacted for scheduling.
- Self-Direct applications require additional steps. Please see the Self-Direct Terms and Conditions for details.

AEP Ohio Business Incentives Program

445 Hutchinson Avenue, Suite 300

Columbus, Ohio 43235

877-541-3048 | aepohiosolutions@clearesult.com

Visit our website at AEPohio.com/solutions

¹A Pre-Approval Application is not a guarantee of an incentive; the actual incentive will be based on the energy savings and equipment installed as determined in the Final Application. Funds are reserved for 90 days, unless an applicant is granted an extension. The program team reserves the right to contact the customer before the reservation expiration date to ensure that the project is moving forward. If the project is not underway, the reservation may be cancelled. Reserved funds are not transferable to other projects, facilities and/or customers. A waiting list will be established when funds become fully subscribed.



Application Checklist

Pre-Approval

- ☐ Completed Applicant Information
- ☐ Estimated Total Project Cost
- ☐ Estimated Completion Date
- ☐ Completed Incentives Requested Section of Application
- ☐ Applicable Incentive Worksheets Completed
- ☐ Completed and Signed Customer Agreement
- ☐ Equipment Specifications
- ☐ Proposed Scope of Work
- ☐ W-9 Form (Business Name Must Match Line 1 or 2 on the Form)

Final Application Only (Without Pre-Approval)

- ☐ Completed Applicant Information
- ☐ Completed Incentives Requested Section of Application
- ☐ Applicable Incentive Worksheets Completed
- ☐ Total Project Cost
- ☐ Completion date
- ☐ Completed and Signed Customer Agreement
- ☐ Completed Third-Party Payment Release Authorization (optional)
- ☐ Itemized Invoices
- ☐ Equipment Specifications
- ☐ Scope of Work
- ☐ W-9 Form (Business Name Must Match Line 1 or 2 on the Form)

Final Application (With Pre-Approval)

- ☐ Completed Applicant Information
- ☐ Assigned Project Number on Signature Page
- ☐ Total Project Cost
- ☐ Project Completion Date
- ☐ Completed and Signed Final Payment Agreement
- ☐ Completed Third-Party Payment Release Authorization (optional)
- ☐ Installed Equipment Specifications (if there were changes from pre)
- ☐ Itemized Invoices
- ☐ Updated Scope of Work (if there were changes from pre)
- ☐ Applicable Incentive Worksheets (if there were changes from pre)



Applicant Information

AEP Application Number AEP - _ _ - _ _ _ _ _

Application Type (Select One)

CUSTOMER INFORMATION

Business Name _____

Name as It Appears on Utility Bill _____

How many AEP Ohio Accounts are at the Project Site? _____

AEP Ohio Account Numbers for this Project¹ _____

Taxpayer ID _____ - _____ W-9 Tax Status (Select One) _____

MAILING ADDRESS - WHERE CHECK WILL BE SENT

Contact Name _____ Contact Title _____

Mailing Address _____ City _____ State OH Zip _____

Phone _____ Ext. _____ Contact Email _____

How Did You Hear About the Program? (Select One) _____ AEP OH Energy Advisor _____

PROJECT INFORMATION

Project Name (if applicable) _____

☐ Check if mailing address and project site address are the same.

Project Site Address _____ City _____ State OH Zip _____

Building Type (Select One) _____ Shift (Select One) _____

Annual Operating Hours _____ Building Area (sq. ft.) _____

Construction Type (Select One) _____ Does the facility have a data center? (Select One) _____

¹Please only enter the first eleven digits of the account number.



Applicant Information

CONTRACTOR INFORMATION

Company Name _____

Contact Name _____ Title of Contact _____

Mailing Address _____ City _____ State OH Zip _____

Phone _____ Ext. _____ Contact Email _____

PRIMARY CUSTOMER CONTACT INFORMATION

Contact Name _____ Title of Contact _____

Phone _____ Ext. _____ Contact Email _____

Who should we contact with questions about the application? ☐ Customer ☐ Contractor

Incentive Summary Table

INCENTIVE CATEGORY	TOTAL INCENTIVES
LIGHTING	
HVAC	
MOTORS & DRIVES	
COMPRESSED AIR	
REFRIGERATION/FOOD SERVICE	
AGRICULTURE	
MISCELLANEOUS	
PROCESS EFFICIENCY	
NC LIGHTING (SELF-DIRECT ONLY)	
TOTAL INCENTIVES	

AEP Application Number AEP - _ _ - _ _ _ _ _



Customer Agreement

APPLICATION AGREEMENT

By signing this document, I agree to program requirements outlined in the measure specifications, Terms and Conditions for the applicable program and Final Application Agreement. As an eligible customer, I verify the information is correct and request consideration for participation under this program. Furthermore, I concur that I meet all eligibility criteria in order to receive payment under this program.

[Link to Efficient Products for Business/Process Efficiency Terms and Conditions, and Final Application Agreement](#)

[Link to Self-Direct Terms and Conditions, and Final Application Agreement](#)

☐ Pre-Application ☐ Final-Application

Project Completion Year (Select One) _____

Self-Direct _____

Project Completion Date _____

Total Project Cost _____

Total Requested Incentive¹ _____

Total Self-Direct Requested Incentive² _____

Print Name _____

Date _____

AEP Ohio Customer Signature _____

PRINT APPLICATION

¹Incentives have a threshold of 50% of the project cost and total incentives paid to a threshold of \$25,000 and Bid4Efficiency above that.

²Self-Direct incentives are 75% of Total Requested Incentive, after 50% of the project cost threshold and tiering is applied.



Third Party Payment Release

THIRD PARTY PAYMENT RELEASE AUTHORIZATION (NOT APPLICABLE TO SELF-DIRECT)

Complete this section ONLY if incentive payment is to be paid to an entity other than the AEP Ohio customer.

Make checks payable to: Company/Individual _____

Mailing Address _____ City _____ State OH Zip _____

Phone _____ Ext. _____

Taxpayer ID of 3rd Party _____ - _____ W-9 Tax Status _____

By signing this document, I authorize the payment of the incentive to the third party named above and understand that I will not receive the incentive payment from AEP Ohio. I also understand that my release of the payment to a third party does not exempt me from the program requirements outlined in the measure specifications, Terms and Conditions, and Final Application Agreement.

Print Name	Date	AEP Ohio Customer Signature
_____	_____	_____

Contractor: Vaughn Industries

PANEL LUMINAIRES

LM22 - 2 X 2 LIGHT PANEL SERIES

FEATURES


CONSTRUCTION

- Side lit design for an ultra thin profile
- IC rated, IP44-suitable for damp or dry locations
- Wide beam angle (120°) for better spacing
- CE and cULus rated
- RoHS compliant
- 5 year warranty (standard)

ELECTRICAL

- Dimmable (via driver or using PWM)⁽¹⁾
- Constant voltage design allows for multiple lights per driver
- LM-80 and LM-79 available
- Panels should be placed within 50 feet of driver
- Rated at 60W max AC power (51W DC)⁽¹⁾

2X2



Project Name	OSU - NRDT
Date	
Type	A1

T/ILT

TILT Part Number	L GM 22 35 W
TILT Driver	LD60

CM22 DCOS

LUMEN PACKAGES (2X2) ⁽¹⁾					
CCT	50,000 hours (L70)				
	STANDARD 90+ CRI, R9 >50				
5000k	Lumens	4700	4157	3736	2775
	LPW	74.1	79.2	82	87.5
4000k	Lumens	4550	4298	3837	2847
	LPW	77.3	78.4	80.4	87.7
3500k	Lumens	4225	3829	3426	2542
	LPW	72.5	75.2	77.4	84.8
3000k	Lumens	3900	3360	3016	2237
	LPW	67.6	71.5	73.9	81.4

ORDERING INFORMATION

L	GM	22	50	W
Fixture Type	Mounting Type	Size	CCT	Frame Color ⁽⁴⁾
L - Light	GM - Grid Mount	22 - 2' x 2'	50 - 5,000K 40 - 4,000K 35 - 3,500K 30 - 3,000K	W - White B - Black S - Silver + - special order

USE WITH

Driver	
LD60	LD60PE7
LD60P	LD90PE7
LD90	LD100PE7
LD100P	

DRIVER SPECIFICATION

NOTE on DRIVERS: UL 8750, short circuit, over current, over voltage, and over temperature protection
UL recognized and CE rated, RoHS compliant
Class II, SELV, IP67

Model ⁽⁵⁾	Size in Inches (LxWxH)	AC Input	DC Output	Dimming ⁽⁹⁾	Temp	Max Fixtures ⁽⁸⁾
LD60	6.50 x 1.63 x 1.26	90 - 305V	60W	I-10V	-40C - 60C	1
LD60P	12.50 x 2.38 x 1.50	90 - 305V	60W	I-10V	-40C - 70C	1
LD90	6.34 x 2.40 x 1.26	90 - 305V	90W	I-10V	-40C - 60C	1
LD100P	14.50 x 2.63 x 1.58	90 - 305V	100W	I-10V	-40C - 60C	2

Emergency ⁽⁷⁾	Size in Inches (LxWxH)	AC Input	Output ⁽⁶⁾	Lumens	Temp	Max Fixtures ⁽⁸⁾
LD60PE7	13.00 x 5.50 x 1.75	90 - 305V	7W for 90 mins	400 - 600	0C - 50C	1
LD90PE7	13.00 x 5.50 x 1.75	90 - 305V	7W for 90 mins	400 - 600	0C - 50C	1
LD100PE7	13.00 x 5.50 x 1.75	90 - 305V	7W for 90 mins	400 - 600	0C - 50C	2

NOTES (NUMBERS)

- (1) See driver or dimming product sheet for specific details
- (2) AC W used for circuit power, DC W used for driver circuit
- (3) Lumen packages provided using Dim Chip with driver
- (4) Colors other than white are custom
- (9) TILT drivers use a I-10V control but are compatible with most 0-10V control systems. For details specific to your system, contact us at 855.440.8458

- (5) "P" designation after watt rating denotes Plenum Rated
- (6) Based on watt load of fixtures and driver output
- (7) See Product Sheet for Emergency Drivers
- (8) Safe amount of fixtures per driver




Contractor: Vaughn Industries

Job Name: OSU NRD T Building B

TILT PANEL LUMINAIRE LM22

PHOTOMETRIC CHARTS WITH TESTING DATA. CALL FOR SPECIFIC INFORMATION NOT LISTED HERE: 855.440.8458

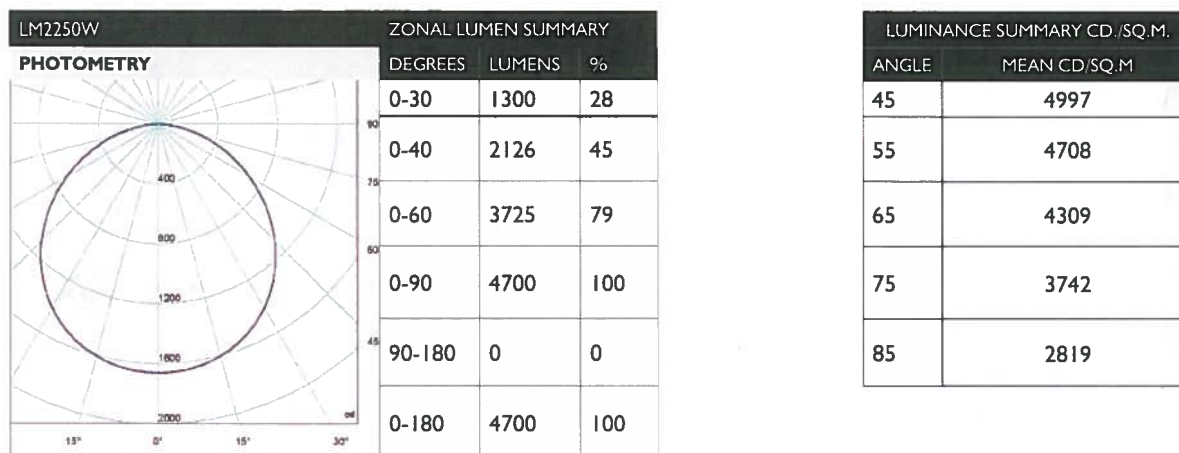

	COEFFICIENT OF UTILIZATION								
	80%			70%			50%		
	70	50	30	70	50	30	70	50	30
0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11
1	1.09	1.05	1.01	1.07	1.03	0.99	0.98	0.95	0.92
2	1.00	0.92	0.86	0.98	0.90	0.85	0.87	0.82	0.78
3	0.91	0.81	0.74	0.89	0.80	0.73	0.77	0.71	0.66
4	0.84	0.73	0.65	0.82	0.72	0.64	0.69	0.62	0.57
5	0.78	0.65	0.56	0.75	0.64	0.56	0.62	0.55	0.49
6	0.71	0.58	0.50	0.69	0.57	0.49	0.56	0.48	0.43
7	0.66	0.52	0.44	0.64	0.51	0.43	0.50	0.42	0.37
8	0.61	0.47	0.39	0.59	0.47	0.39	0.45	0.38	0.33
9	0.56	0.43	0.35	0.55	0.42	0.35	0.41	0.34	0.29
10	0.52	0.39	0.31	0.51	0.39	0.31	0.38	0.31	0.26

NOTES

- Lifespan: 50,000 hrs (L70)
- LM79 and LM80 available upon request. Call 855.440.8458
- IES files available online at: laurenillumination.com/resources



Lauren Illumination is a Lauren International Company
 ©Lauren Illumination and ©TILT are registered trademarks of Lauren Illumination
 2162 Reiser Avenue SE | New Philadelphia, OH 44663 P: 855.440.8458 | F: 330.339.1515
laurenillumination.com | laureninternational.com

SURFACE MOUNT KIT


FEATURES

- Designed for use with TILT panels and drivers
- Multi-purpose hanging configurations for:
 - Mounting light to ceiling
 - As a down-lighted hanging fixture
 - As a two-way, up and down-lighted fixture
- Frame profile: 2-1/2" deep
- Screw location guide included in flange for mounting
- Heavy-duty frame construction
- Easily adapted for conduit feed

Project Name	OSU - NRDT
Date	
Type	A1

T/LT

TILT Part Number	CM22
------------------	-------------

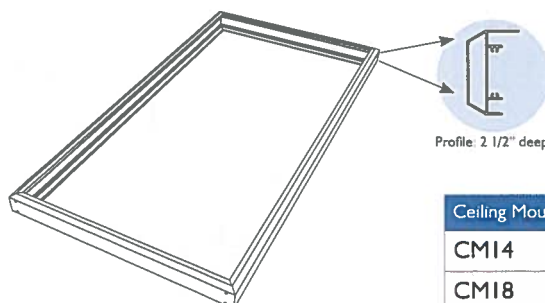

Ceiling Mount and Hanging Kit Models:		
CM14	CM22	CM24
CM18	Custom ¹	HK02

Part Number
Example: CM14

CM	I4		
Name	Model	Description	Use
CM - Surface Mount HK - Hanging Kit	CM14	Accessories, 1' x 4' Surface Mount	Use to surface mount or for hanging* panel lights.
	CM18	Accessories, 1' x 8' Surface Mount	
	CM22	Accessories, 2' x 2' Surface Mount	Call for details
	CM24	Accessories, 2' x 4' Surface Mount	
	Custom ¹	Made to order sizes	
	HK02	2 pcs. Hanging Mount Kit*	

SURFACE MOUNT	MODEL	DESCRIPTION	WIDTH	LENGTH	USE
	CM14	Accessories, 1'X4' Surface Mount	13.075"	49.075"	Use to surface mount or hang panel lights. NOTE: Hanging mount requires use of HK02.
	CM22	Accessories, 2'X2' Surface Mount	25.075"	25.075"	
	CM24	Accessories, 2'X4' Surface Mount	25.075"	49.075"	
	CM18	Accessories, 1'X8' Surface Mount	13.075"	96.825"	
	CUSTOM ¹	Made to order	Custom ¹	Custom ¹	Call for details
	HK02	2 pcs Hanging Mount Kit	Specify 5-foot or 10-foot lengths for cables		Use to hang* Surface mount kit from Surface or substrate

NOTES

* When hanging light panels, Surface Mount Kit requires the use of HK02

¹ Custom sizes available - call when ordering 855.440.8458




Contractor: Vaughn Industries

DIM CHIP

FEATURES

- Dim Chips are designed to be used with TILT drivers
- Limits driver wattage through control circuit
- Four level options available per chip
- Custom settings available with driver wattage levels set to customer request
- Limits both light output and corresponding wattage with no efficiency loss
- 5 year warranty

Project Name	OSU - NRD T
Date	
Type	A1
T/ LT	
TILT Part Number	DCO

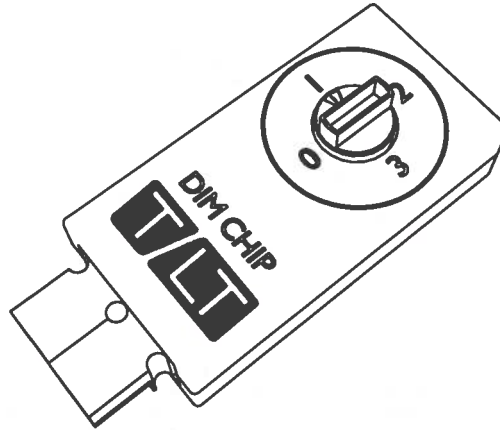

Dim Chip Models:
DC01
DC02
DC03
CUSTOM +

SPECIFICATIONS

PERCENT OF DRIVER WATTAGE				
ALL DIM CHIP MODELS	DC01	DC02	DC03	CUSTOM +
Dim Chip Setting 0	100%	100%	100%	Contact Lauren at 855.440.8458 for a custom Dim Chip, to set wattage or lumen levels for your application
Dim Chip Setting 1	85%	75%	50%	
Dim Chip Setting 2	75%	50%	30%	
Dim Chip Setting 3	50%	25%	10%	

FOR USE WITH

DOWNLIGHTS	PANELS
LCLCV6 LCLCV8	LGM14, LFM14 LGM22, LFM22 LGM24

DIMMER COMPATIBILITY CHART*

DRIVER	DIMMING
NOTE: Driver selection may be specific to your installation configuration. For complete listing of driver and its particular dimming compatibility, see individual TILT driver sheet.	

NOTES

*TILT drivers use a 1-10V control but are compatible with most 0-10V control systems. For details specific to your system, contact us at 855.440.8458

+ For custom Dim Chip settings, call Customer Service at 855.550.8458




Contractor: Vaughn Industries

DIM CHIP DC01, DC02, DC03

WIRING DETAIL & SETTING CONTROL

SEE INSTALLATION MANUAL FOR APPROVED INSTALLATION METHODS AND OTHER DETAILS FOR ALL DRIVERS

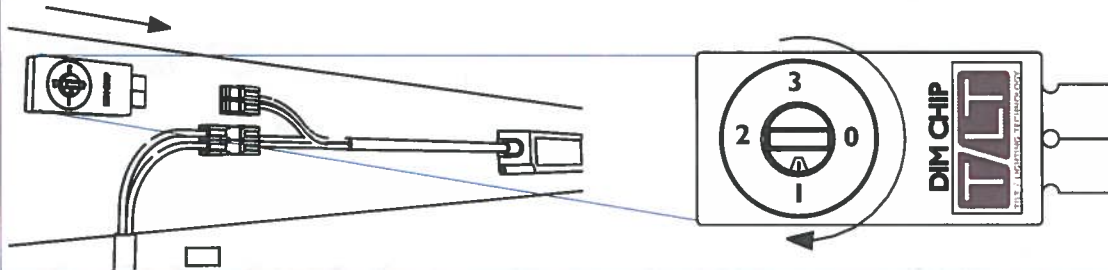

SETTING DIAGRAM

DC01		DC02		DC03		CUSTOM ⁺	
Setting	% of driver Wattage	Setting	% of driver Wattage	Setting	% of Driver Wattage	Setting	% of Driver Wattage
0	100	0	100	0	100	Contact Lauren at 855.440.8458 for a custom Dim Chip, to set wattage or lumen levels for your application.	
1	85	1	75	1	50		
2	75	2	50	2	30		
3	50	3	25	3	10		

NOTES

- For details specific to your system, call us at 855.550.8458
- + For custom Dim Chip settings, call Customer Service at 855.550.8458
- TILT drivers use a 1-10V control but are compatible with most 0-10V control systems. For details specific to your system, contact us at 855.440.8458



Lauren Illumination is a Lauren International Company.
©Lauren Illumination and ©TILT are registered trademarks of Lauren Illumination
2162 Reiser Avenue SE | New Philadelphia, OH 44663 P: 855.440.8458 | F: 330.339.1515
laurenillumination.com | laureninternational.com

Contractor: Vaughn Industries


Job Name: OSU NRDT Building B

CONSTANT VOLTAGE DRIVERS

PRODUCT DATA SHEETS

FEATURES

- 24V constant voltage power supply
- Protections include:
 - Short circuit / over current / over voltage / over temperature
- Class II power unit, SELV rated
- Built in active PFC function
- Dimmable (see chart below)
- UL recognized
- RoHS compliant
- CE rated
- 5-year warranty

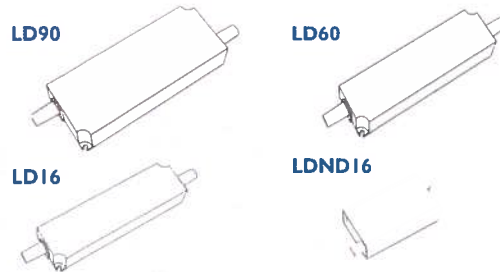

Project Name	OSU - NRDT
Date	
Type	A1

T/LT

TILT Part Number	LD60
------------------	-------------

Constant Voltage Driver Models:

LD90
LD60
LD16
LDND16 (Non Dim)

SPECIFICATIONS

ALL PLENUM MODELS	LD60	LD90	LD16	LDND16 (Non Dim)
Length x Width (in)	6.500" x 1.750"	6.500" x 2.375"	6.00" x 1.625"	3.00" x 1.50"
Height (in)	1.250"	1.500"	1.250"	1.125"
IP Rating	IP67	IP67	IP30	IP30
DC output supply (W)	60	90	16	16
AC input voltage range	90 - 305VAC	90-305VAC	90-305VAC	90 - 264VAC
AC inrush current (max) Cold start	75A @ 230VAC	70A @ 230VAC	50A @ 230VAC	70A @ 230VAC
Safety standards	UL 8750	UL 8750	UL 8750	UL 8750
Protections	Short circuit/over current/over voltage/over temperature			
Thermal Operation	-40°C - 50°C	-40°C - 50°C	-40°C - 50°C	-40°C - 50°C
Thermal Shutdown	75°C	70°C	70°C	70°C

FOR USE WITH

LUMINAIRE	CV DRIVER	MAX # UNITS	CV DRIVER	MAX # UNITS	CV DRIVER	MAX # UNITS
LCLCV6	LD16, LDND16	1	LD60	5	LD90	8
LCLCV8	LD16, LDND16	1	LD60	4	LD90	6
LGM22	LD16, LDND16	0	LD60	1	LD90	1
LGM24	LD16, LDND16	0	LD60	0	LD90	1
LGM14	LD16, LDND16	0	LD60	1	LD90	1

DIMMER COMPATIBILITY CHART

BRAND	MODEL
TILT	WLVD
TILT	DIM CHIP (DC01, DC02, DC03)
LEVITON (0-10V)	IP-710*
LUTRON (0-10V)	DVSTV*

*TILT drivers use a 1-10V control but are compatible with most 0-10V control systems.
For details specific to your system, contact us at 855.440.8458





Contractor: Vaughn Industries

Job Name: OSU NRD T Building B

CONSTANT VOLTAGE DRIVERS LD90, LD60, LD16, LDND16**CONNECTING CONSTANT VOLTAGE DRIVERS - DC WIRING****CLOSE-UP DC WIRING DETAIL**

SEE INSTALLATION MANUAL FOR APPROVED INSTALLATION METHODS AND OTHER DETAILS FOR ALL DRIVERS

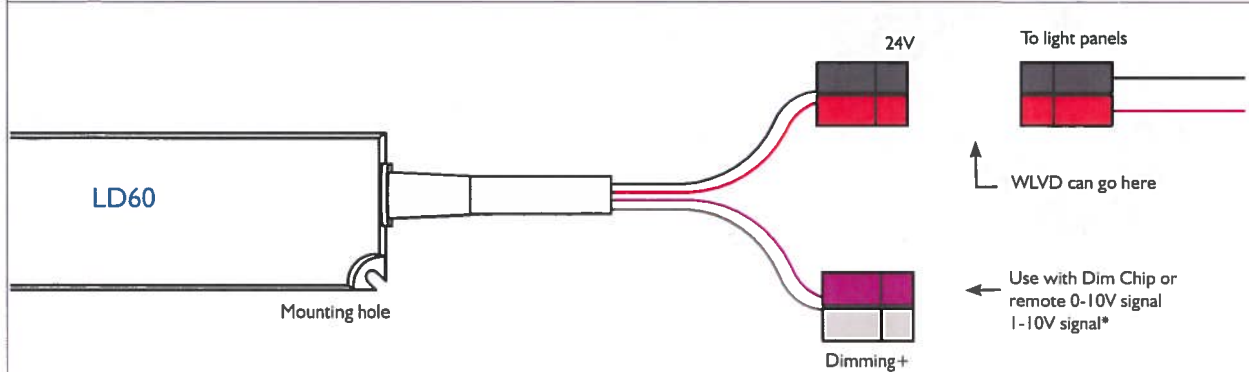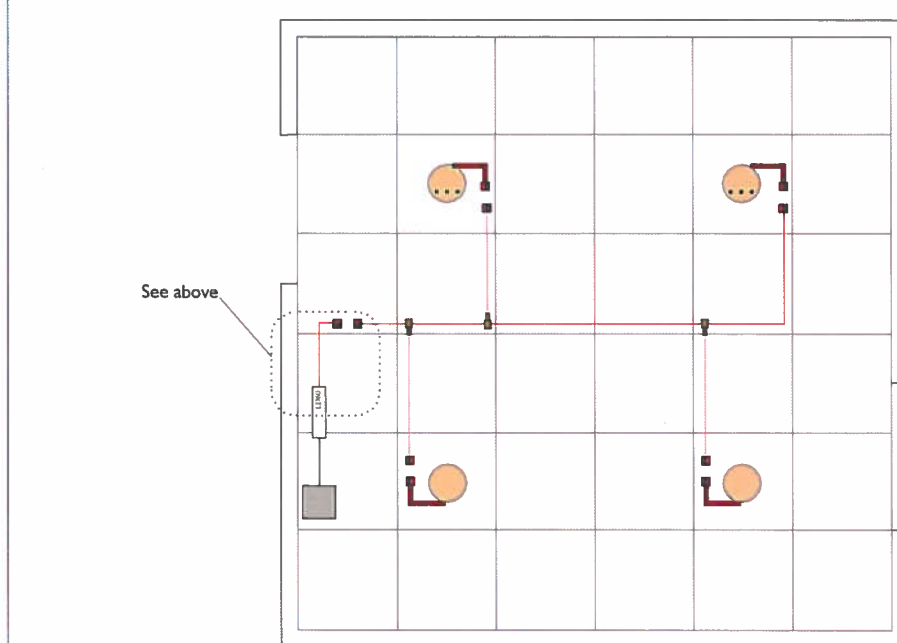**SAMPLE ROOM LAYOUT WITH DRIVERS INSTALLED****NOTES**


- Lights should be placed within 50 feet of driver
- Wattage load (lights) should not exceed wattage of driver
- + TILT drivers use 1-10V. They will accept 0-10V signals. Operation from 0-10V will depend on the system being used. For details specific to your system, call us at 855.440.8458



©TILT is a registered product brand
of Lauren Illumination



Lauren Illumination is a Lauren International Company
2162 Reiser Avenue SE | New Philadelphia, OH 44663
P: 855.440.8458 | F: 330.339.1515
laurenillumination.com | laureninternational.com

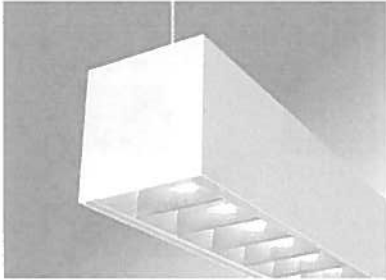

CONSTRUCTION 6063-T5 extruded aluminum housing. Highly reflective die-formed white painted aluminum reflector. Die-formed anodized snap-in aluminum semi-specular parabolic louver, removable for lamp replacement.

ELECTRICAL Standard T5 and T5HO: Program start 120/277 volt integral electronic ballast with less than 10% THD. Standard T8: Instant start 120/277 volt electronic ballast with less than 10% THD. Through wiring with quick connects standard. Standard single circuit. Each ballast provided with disconnects to meet luminaire disconnect code requirement.

MOUNTING Aircraft cable and wall mount available. Adjustable aircraft cable mounts on 4'-0" and 8'-0" centers (See back page for MR16 mounting detail). Aircraft Cable supplied with 5" power and 2" non-power canopies. Refer to installation instructions for appropriate ceiling detail. Canopies are painted white unless otherwise specified.

FINISH Standard powder-coat white painted finish. Consult factory for custom colors.

LABELS UL and cUL Listed, approved for dry/damp location unless otherwise noted.

LUMINAIRE SPECIFICATION

Sample Catalog #: EX4-A-N-1T5-24-AC48G1-120-1C-W

EX4_ - _ - N- _T_ -

EX4-
Edge EX 4,
Straight Lamp

N- None,
Closed

1T5- (1) T5
2T5- (2) T5¹
1T5HO-(1) T5HO
2T5HO-(2) T5HO¹
1T8- (1) T8²
2T8- (2) T8²

LO- Lens Overlay
M_ - MR16 Lamp³
CN- Non-
Illuminated
Connector

P- Parabolic Louver
L- White Louver
WP- Asymmetric with
Acrylic Lens⁴
WL- Asymmetric with
Acrylic Lens⁴

Individual Units

4- 4'
8- 8'


Continuous Runs

xx' - Specify nominal
overall row length
in 4' increments


¹Not available with Asymmetric Lamp option (WP and WL). ²Consult factory for additional lengths. ³Consult factory for tegular edged tiles. ⁴Replaces standard 2" canopy. ⁵347 volt and UNV not available with MR16 and battery packs. ⁶Some Edge EX configurations will not accommodate all electrical options. Consult factory. ⁷See Back Page for Layout and Ordering Information. ⁸WP, WL, 2T5/2T5HO, and T8 lamps are not available with staggered lamp option (EX4S).

PHOTOMETRICS


EDGE EX4_P




Test # 202436
Part # EX4-P-N-1T5
Total Luminaire Efficiency: 74.5%



Test # 202438
Part # EX4-P-N-1T8
Total Luminaire Efficiency: 61.6%




Test # 202442
Part # EX4-WP-N-1T5
Total Luminaire Efficiency: 72.9%



Test # 202444
Part # EX4-WP-N-1T8
Total Luminaire Efficiency: 59.5%


• INDIVIDUAL MODULES¹

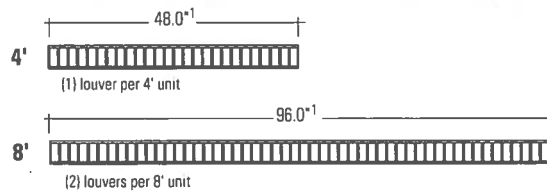

See Straight or Staggered Lamp Guide for row configuration, wattage and number of lamps per run.

¹Add 1/16" for each end plate or 1/8" to the overall length of the row.

• MOUNTING OPTIONS

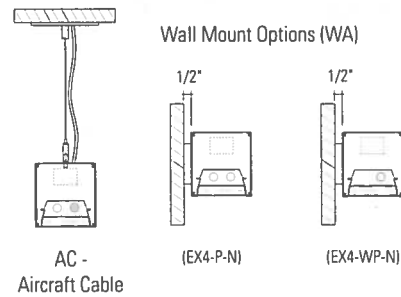



• NON-ILLUMINATED CONNECTOR

APPLICATION: Utilize non-illuminated connectors to create unique configurations.

INSTALLATION: Non-illuminated connector easily joins to linear fixtures using standard Pinnacle Lighting joiner kits.

ORDERING INFORMATION: Specify Non-Illuminated Connector (CN) in the options section of the part number. Sample Catalog #: EX4-P-N-1T5-24-AC48G1-120-1C-W**CN**.



	Project 14-16183-14 Date 10/29/2014 Contractor: Vaughn Industries	Job Name: SPM9 2 32 20/80 WHR 8FT R8 120 GEB10PS SCT LP835 F1/24 C111 DU ACG	Catalog Number SPM9 2 32 20/80 WHR 8FT R8 120 GEB10PS SCT LP835 F1/24 C111 DU ACG	Type
	Submitted By LIGHTING UNLIMITED INC	Notes		A15

Peerless

Staple Lens
I/D or Direct T8

SPECIFICATIONS


Suspended

SPM9

SPM9 2 32 20/80 WHR 8FT R8 120 GEB10PS SCT LP835 F1 24 C111 DU ACG

LAMPING OPTIONS


SPM9 - 1



SPM9 - 2



SPM9 - 3



SPECIFICATIONS

Construction

Nominal 8 1/2" x 2 3/8" rectangular housing is formed from cold-rolled steel. Die-cast aluminum end caps are mechanically attached with no exposed fasteners. Rounded end caps standard. For squared end caps, choose option FEP.

Reflectors/ Shielding

Formed, pre-finished white reflector standard. Acrylic lens shielding.

Finish

Finish for housing and end caps is white, black or painted aluminum. Custom colors available, consult factory.

Electrical

Specify 120V, 277V or 347V. Pre-wired with 16AWG fixture wires. For special circuiting or wire gauge, consult factory. Plug-in electrical connectors included. UL and C-UL listed.

Luminaire Length

4', 8' and 12' lengths in a single section for nominal suspension spacing of 4', 8' and 12'. For total luminaire length, add 1 1/8" for each end cap.

Using internal joiners, 4', 8' and 12' sections can be joined to form longer length luminaires.

Installation Features

Y-hangers with adjustable cables come standard to simplify leveling across the width and length. Individual 4', 8' and 12' luminaires can be ordered with end caps and power cords pre-installed and hanging hardware included in the luminaire packaging to reduce installation time (option IND).

Packaging

Recycled cardboard box, folded cardboard cradles and kraft tape. Biodegradable protective luminaire bag.

CATALOG NUMBER

Examples: SPM9 2 32 WHR 4 FT R12 277 GEB10 DCT LP835 F1/24 C032 — SPM9 3 32 WHR 32 FT R8 277 GEB10 15E EL DCT LP835 F1/24 C032


SPM9	2	32	20/80	WHR	8FT	R8	120	GEB10PS	▶▶▶
Luminaire	# of Lamps in Cross Section	Lamp Type	Distribution (nominal)	Reflector	Luminaire Row Length	Maximum Section Length	Voltage	Ballast Type	
SPM9	32	T8	(Blank) 65% up, 35% down standard 40/60° 40% up, 60% down 20/80° 20% up, 80% down 0/100° 100% down CLIP Center lamp isolator	WHR White Reflector (Standard)	X FT (4 increments)	R4 4' section(s) R8 8' section(s) R12 12' section(s)	120 277 347	GEB10 <10% THD Electronic DMHL3D Lutron Hi Lume dim OSSC*	**PROGRAMMED START Reference Ballast Wizard on website or consult factory for other options.
▶▶	# of Emergency Modules	Emergency Type ⁴	Switching	Lamp Color	Mounting Type /	Overall Suspension ⁵	Finish	Options	
	(Blank) None 1SE 1 section 2SE 2 sections XSE X sections	(Blank) None EC Emergency circuit EL ⁴ Emergency battery pack EN ⁴ Emergency battery pack w/night light circuit	SCT Single circuit DCT Dual circuit	L/LP No lamp L/LPE No lamp. Wired for energy saving lamps. LP830 3500K 80+ CRI LP835 3500K 80+ CRI LP841 4100K 80+ CRI Reference Lamp Chart on website or consult factory for other options.	F1/ T-bar ceiling (universal mounting bracket) F1A/ T-bar ceiling (UMB with integrated J-box) F2/ Hard ceiling (horizontal J-box)	24 24" 48 48" 72 72" 96 96" XX XX" Overall suspension is measured from ceiling to bottom of luminaire	C032 White white (high gloss) C111 Painted aluminum (low gloss) C201 Black (low gloss) C099 Custom finish	CP Chicago plenum (available with F1A only) DL Damage location label DU Dust cover FEP Squared end caps GLR Fusing (fast blow) GMF Fusing (slow blow) IND Individual luminaire (factory installed end caps and power cord, hanging hardware in box) MCS Matching feed canopy at support NEPPSD Night enabled control module per row/zone NYC New York City code OJB Offset junction box SLP Sloped ceiling (for 10-45°, must be specified with F2 and OJB options) XXXX Integrated sensor: choose options and obtain code on page 2	
Notes:	1 Nominal distribution, refer to photometric test for exact distribution 2 Available with 3-lamp cross section only 3 Not available in 347V	4 EL and EC are installed in last 4 of luminaire sections. Separate feed required. 5 Adjustable cable gripper comes standard						ACG Adjustable cable grippers	

2246 5th Street, Berkeley, CA 94710 • Tel: 510.845.2760 • Fax: 510.845.2776 • Email: techsupport@peerlesslighting.com • PeerlessLighting.com

© 2014 Acuity Brands Lighting, Inc. All Rights Reserved. "Peerless" is a registered trademark of Acuity Brands Lighting. Products in this document may be covered by one or more U.S. Patents and Patents Pending. Specifications subject to change without notice. Year limited warranty. Complete warranty terms located at: www.acuitybrands.com/customerresources/terms_and_conditions.asp

Date Submitted: Sept. 2, 2015

SPM9 Staple Lens I/D or Direct T8
Distributor: C.E.D. Columbus, Oh 43207

	Project 14-16183-14 Date 10/29/2014 Contractor: Vaughan Industries Submitted By LIGHTING UNLIMITED INC	Job Name: SPM9 LPB27 Redding R Catalog Number SPM9 LPB27 Redding R 8FT R8 120 GEB10PS SCT LP835 F1/24 C111 DU ACG Notes	Type <h1>A15</h1>
--	--	--	--------------------------

Peerless

Staple Lens I/D or Direct T8

Type:

Project:

Suspended

SPM9

INTEGRATED nLIGHT MICRO SENSOR

Determine the appropriate sensor type, network type and sensor power source for your application. Enter the code in the Options section of the Catalog Number.


EXAMPLE PDT1

Sensor Type (choose one)		Network Type & Sensor Power Source (choose one)	
ADC nLight model nES ADCX	Daylight Dimming Specify 0-10V dimming ballast No occupancy sensing	1*	nLight-Enabled (Network-Ready) with Luminaire-Integrated Power Pack 10' Cat-5e cable and splitter provided
PDT nLight model nES PDT7 ADCX	Daylight Dimming and/or Occupancy Detection Specify 0-10V dimming ballast for daylight dimming Specify fixed-output ballast for occupancy detection only (daylight dimming disabled)	2	Standalone Operation (No Networking) with Luminaire Integrated Power Pack No Cat-5e cable provided
		3*	nLight-Enabled (Network-Ready) with Remote nLight Power Pack or nPanel 10' Cat-5e cable and splitter provided Order required remote nLight Power Pack or nPanel separately through nLight (Acuity Brands Controls)

For more information about the Integrated nLight Micro Sensor, its capabilities and options, download the PDF guide at: PeerlessLighting.com/nLight-Sensor-Guide
 *nLight-Enabled (network-ready) options include one RJ-45 connector on the luminaire and 10' of Cat-5e cable and a splitter to control the entire luminaire row (depending on wattage/voltage limitations). The Cat-5e cable drop is located in the same section as the sensor. For multiple zones, please contact techsupport@peerlesslighting.com.


WEIGHTS & SUPPORT SPACING

Suspension spacing equals section length. Default location shown. Consult factory for stem mounting suspension spacing and alternate locations.

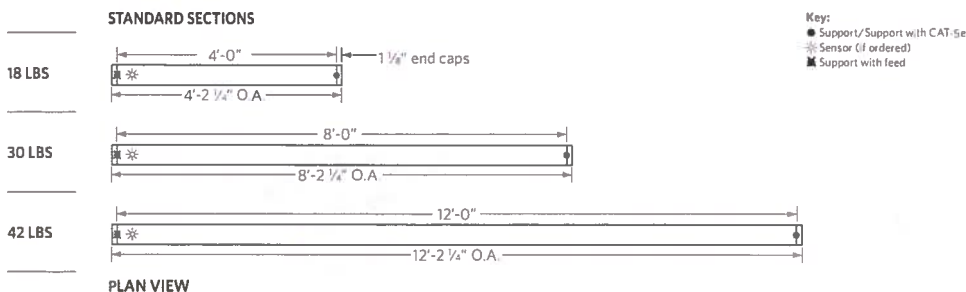

PHOTOMETRICS

Actual performance may differ as a result of end-user environment and application.

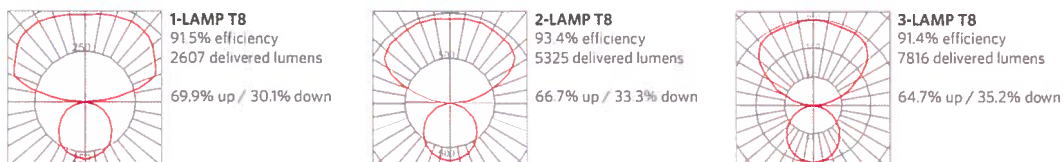

Contractor: Vaughn Industries

Job Name: OSU NRD Building B

Submitted by Lighting Systems of Columbus

**Job Name:**OHIO STATE UNIVERSITY NORTH RESIDENTIAL
DISTRICT TRANSFORMATION**Catalog Number:**

034SUSSW

Notes:


Type:**A17**

LSC14-37947


O3 | allège³

elements

omni-direct

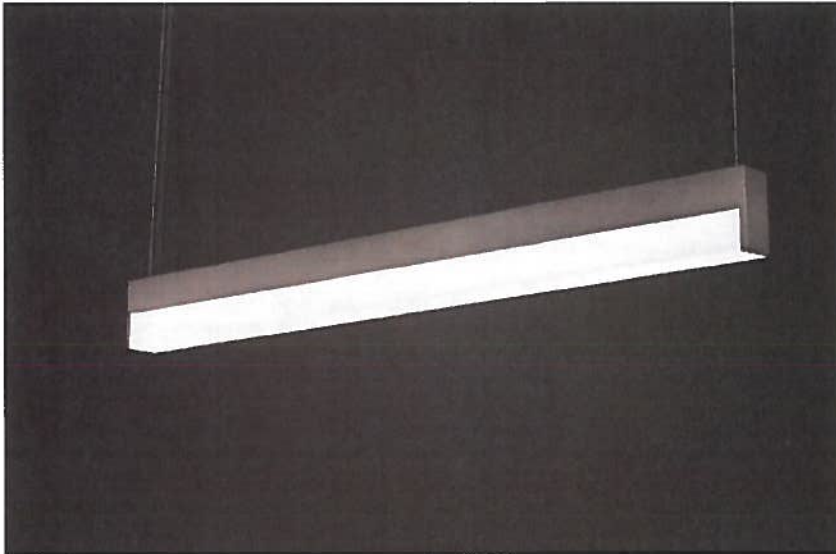


suspended



ceiling



wall

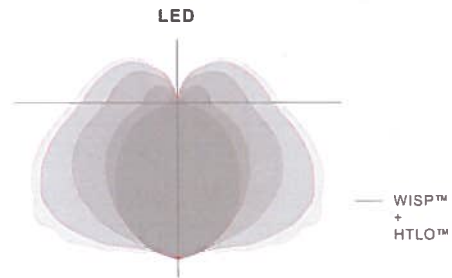

2, 3, 4' individual

8' individual

12' individual

16' joined

20' joined

24' joined

LED	1 board in cross	
per foot	watts/ft	lumens/ft
LS	5	600
LH	10	1200

Lumens at board at 4000K.
Consult IES files online for delivered lumens.
Specifications subject to change

Available Light Platforms:**Available Mounting:**

Contractor: Vaughn Industries

Job Name: OSU NRODT Building B

Submitted by Lighting Systems of Columbus

Lighting Systems
of Columbus, Inc.**Job Name:**OHIO STATE UNIVERSITY NORTH RESIDENTIAL
DISTRICT TRANSFORMATION**Catalog Number:**

O34SUSSW

Notes:

Type:**A17**

LSC14-37947

03 | allège³

project

type

quantity

interior**Mounting:**

Single Cable: (1) 4", 1mm stainless steel aircraft cable w/ fully adjustable grippers and locking device. 5' plastic-coated, silver-braided, flexible cord. Satin white, square canopy is standard.

Pendant/Stem: 3/8" stem and round canopy, painted white. Indicate pendant length. If specified for earthquake zone, a light will provide swivel canopies.

Wall Blocks: Precisely milled aluminum block mounts provide minimalistic appearance. 3/8", 1/2", 1" or 2" deep. ADA compliant with 3/8", 1/2" or 1" blocks. (2) blocks provided per fixture, lengths 8ft or less, (3) blocks per 12ft. Direct-to-wall mounting is not available due to lens proximity to wall.

Ceiling/Surface Mount: Fixture mounts directly to ceiling, power connects inside fixture using BX or MX style wiring.

Lengths:

All length dimensions are nominal, used for general length identification purposes. Actual lengths may vary by several inches. Lengths to 12' are individual fixtures and do not connect. Lengths beginning with "R" designate standard, nominal rows comprised of 4' and/or 8' sections. 3/8" mid plate joiners are visible between sections.

Specify all modifications with the "integrations" specification sheet: nominal lengths other than the standards available here, rows longer than 24', exact lengths, span mount, mullion mount, etc.

LED:

5yr warranty. >60,000hr LED life. Tested to LM-79 and LM-80. See wattage/lumen table for specifications per foot. All specifications are subject to change.

T5/T5HO:

Single lamp in cross section. Program start is factory standard.

T8:

Single lamp in cross section. Instant start is factory standard: choose low <0.8BF, standard 0.8-1.0BF, high >1.0BF. Specify if program start or custom ballast factor is required.

Construction:

60% recycled aluminum extruded housing. Precision milled endcaps. 180° omni-directional 3D lens.

Finish:

Electrostatically applied powder coat finish.

Listing:

UL/CUL. Damp Location.

Companion Luminaires:

O2 sconce

Legend:

1. Emergency ballast not applicable on lengths 3ft or less.
2. Standard multi-circuiting. See fixture chart below.

Series: **O3****Dimension:**advise
length ?

nominal 2'	2
nominal 3'	3
nominal 4'	4
nominal 8'	8
nominal 12'	12
nominal 16' row	R16
nominal 20' row	R20
nominal 24' row	R24

Lamping:

LED standard output **LS**

LED high output **LH**

T5 (1) **S**

T5HO (1) **H**

T8 (1) low output **T8L**

T8 (1) standard output **T8S**

T8 (1) high output **T8H**

LED Temp (if applicable):

3000k **30**

3500k **35**

4000k **40**

Voltage:

universal 120V - 277V **U**

120V **1**

277V **2**

347V **3**

Optics:

WISP™ lens **S**

WISP™ + HTLO™ lens **SH**

Mounting:

single aircraft cable **S**

pendant / rigid stem - indicate stem length **P**

pendant / rigid stem for earthquake zone - indicate stem length **PV**

wall mount blocks 1" **M1**

wall mount blocks 2" **M2**

wall mount blocks 3/8" **M3**

wall mount blocks 1/2" **M5**

ceiling/surface mount **F**

Finish:

a lightanum™ **T**

satin white **W**

satin black **B**

textured eggshell white **E**

other - specify RAL# **O**

Options:

dimming - specify manufacturer, model/series and voltage **D**

emergency (fluorescent only) - specify model/series or lumens **E**


external fusing **F**

multi-circuit **M**



new york city code **N**

Multi-circuit standards

2, 3', 4'	
6'	

	Project 14-16183-14 Date 10/29/2014 OSU HRT BUILDING	Catalog Number 3550B-48 2XF.T5.28 120V-FRO	Type A18
	Submitted By LIGHTING UNLIMITED INC	Notes	

DOUBLE FLARE 3550B

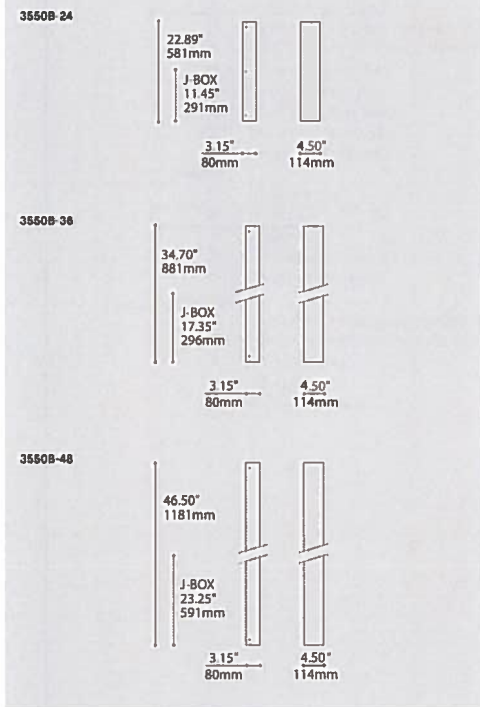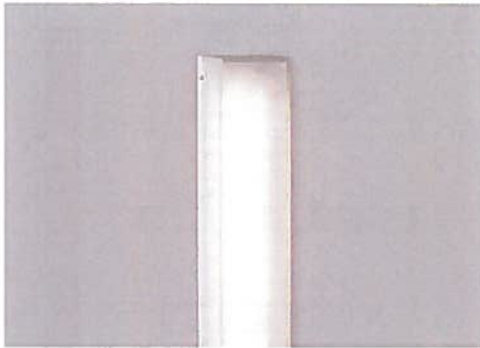


ORDERING SPECIFICATION	SPECIFICATION DE COMMANDE	CODE
MODEL / MODÈLE		3550B
3550B	DOUBLE FLARE	
LUMINAIRE LENGTH / LONGUEUR DU LUMINAIRE		48
24	24"	
36	36"	
48	48"	
LIGHT SOURCE / SOURCE LUMINEUSE		2XF.T5.28
(WATTAGE, LAMP TYPE, LAMP FORM, BASE TYPE, OTHER INFO)		
3550B-24		
2XF.T5.14	14W X 2, T5	
2XF.T5.24	24W X 2, T5 HO	
3550B-36		
2XF.T5.21	21W X 2, T5	
2XF.T5.39	39W X 2, T5 HO	
3550B-48		
2XF.T5.28	28W X 2, T5	
2XF.T5.54	54W X 2, T5 HO	
VOLTAGE / VOLTAGE		120V
120V	120 VOLT	
277V	277 VOLT	
347V*	347 VOLT	
*ONLY AVAILABLE WITH 2XF.T5.54 (NON DIMMING BALLAST)		
DIMMING OPTION / OPTION DE GRADATION		
AVAILABLE WITH 2XF.T5.24 AND 2XF.T5.54		
DM1	ADVANCE MARK 10 ELECTRONIC DIMMING BALLAST	
AVAILABLE WITH 2XF.T5.14, 2XF.T5.21, 2XF.T5.28 AND 2XF.T5.54		
DM7	ADVANCE MARK 7 ELECTRONIC DIMMING BALLAST	
AVAILABLE WITH ALL LIGHT SOURCES		
D3D	LUTRON HI-LUME 3D ELECTRONIC DIMMING BALLAST (ECOSYSTEM DIGITAL LINK WIRING)	
D33	LUTRON HI-LUME 3D ELECTRONIC DIMMING BALLAST (3-WIRE WIRING)	
EMERGENCY BATTERY / BATTERIE D'URGENCE		
AVAILABLE WITH ALL LIGHT SOURCES, 120V OR 277V ONLY		
NOT AVAILABLE WITH A DIMMING BALLAST		
EM	EMERGENCY BATTERY	
STRUCTURE FINISH / FINI STRUCTURE		FRO
FRO	FROSTED	

PRODUCT CHARACTERISTICS / CARACTÉRISTIQUES DU PRODUIT



DESIGN:	Modern rectangular profile available in three lengths and updated performance. ADA compliant.
LIGHT SOURCE:	Highly efficient fluorescent T5 and T5 HO light sources. Dimming and emergency available.
STRUCTURE:	Structure in extruded aluminum & die-stamped steel. Injection moulded plastic end caps.
DIFFUSER:	Machined & frosted acrylic housing with snap-fit, extruded micro-prism acrylic lens.
CERTIFIED:	c-UL-us
CONCEPTION:	Profil carré et contemporain plus performant offert en trois longueurs. Conforme à la norme ADA.
SOURCE LUMINEUSE:	T5 et T5 HO à haute performance; ballasts à gradation et d'urgence disponibles.
STRUCTURE:	Structure en acier extrudé et en acier embouti. Embouts injectés en plastique.
DIFFUSEUR:	Bolier d'acrylique usiné et givré avec hxe par enclenchement. Lentille extrudée en acrylique avec micro-prismes.
CERTIFIÉ:	c-UL-us


FAMILY / FAMILLE




SPECIFICATION

Contractor: Vaughn Industries
Submitted by Spectrum Lighting, Inc.

Job Name: OSU NRD Building B


	Job Name: OSU - NRD BUILDINGS	Catalog Number: CF632PCP/CSK36P	Type: A28
	Notes:		

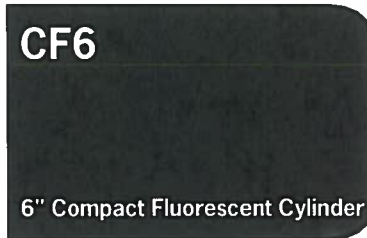



Catalog No. _____

Type _____

Project _____

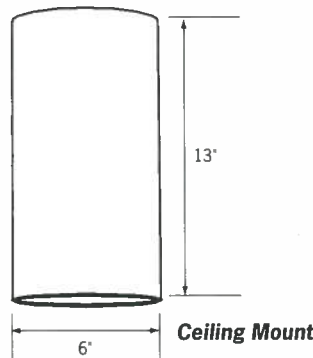

Wall Bracket:
5" x 5"

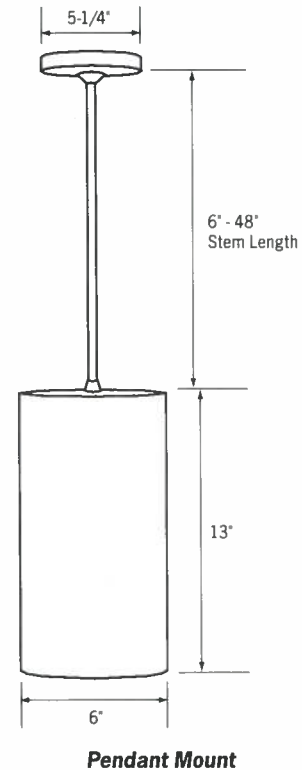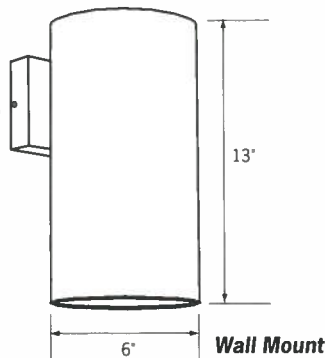

Specifications/Features

Fixture

6" diameter extruded aluminum construction for indoor commercial and industrial applications.
Three mounting options available: ceiling mount, pendant mount or wall mount.
Pendant mount fixtures feature a sloped ceiling canopy (select stem kits separately below).
Wall mount bracket provides easy, one handed installation. Wall mount bracket center point is 3" below the top edge of the fixture.
Safety chain connects the cylinder to the lid (ceiling mount and pendant mount).

Lamp/Electrical

Electronic ballast options for (1) 26W Quad or TTT, 32W TTT or 42W TTT CFL lamps with multi-volt input voltage of 120V to 277V.

Mounting

Ceiling mount, pendant mount or wall mount (hardware included for mounting to octagonal or rectangular switch junction box).

Warranty

This fixture is covered by Con-Tech's full one year replacement guarantee after date of purchase.

Labels/Usage

cULus listed. Suitable for damp locations.

Ordering Information

Example Order: -

Fixture Lamp Mounting Baffle/Reflector Finish Stem Kit - Pendant Mount Only

CF632PCP/CSK36P

CF6

26 - 26W QUAD/TTT **C - Ceiling Mount**
32 - 32W TTT **P - Pendant Mount**
42 - 42W TTT **W - Wall Mount**

B - Black Baffle
C - Clear Reflector

B - Black
P - White
S - Silver

CSK6-(B,P,S) - 6" Stem Kit
CSK12-(B,P,S) - 12" Stem Kit
CSK18-(B,P,S) - 18" Stem Kit
CSK24-(B,P,S) - 24" Stem Kit
CSK30-(B,P,S) - 30" Stem Kit
CSK36-(B,P,S) - 36" Stem Kit
CSK48-(B,P,S) - 48" Stem Kit



1-800-728-0312

www.con-techlighting.com

All specifications subject to change without notice.

Date Submitted: Sept. 2, 2015

Distributor: C.E.D. Columbus, Oh 43207

Contractor: Vaughn Industries

Job Name: OSU NBDT Building B

Submitted by Lighting Systems of Columbus

Lighting Systems
of Columbus, Inc.**Job Name:**OHIO STATE UNIVERSITY NORTH RESIDENTIAL
DISTRICT TRANSFORMATION**Catalog Number:**

P2851-09

Notes:

Type:**A40**

LSC14-37947



Incandescent

Alexa

Close-To-Ceiling

Type _____

-09

P2851

**Finish**Catalog
No.Brushed
Nickel

Lamping

Dimensions (Inches)**A****B**


P2851

-09

2 (m) 100w

12-1/4

11

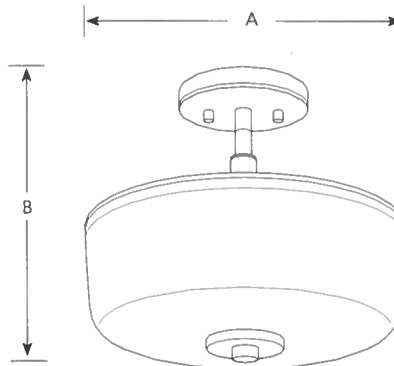Revised the fixture count file from 60W
to 100W**Specifications:**General

- White linen glass bowl: 12-1/4" dia., 4-1/2" ht.
- A crisp, clear edge accent strip complements the etched and clear glass
- Plated Brushed Nickel (-09) finish
- Steel construction
- Companion Bath and Vanity, Chandelier, Close-to-ceiling, Hall and Foyer, Pendant, Wall bracket, fixtures are available

Mounting

- Ceiling mount
- Canopy covers a standard 4" hexagonal recessed outlet box
- Mounting strap for outlet box included

Electrical

- Medium base ceramic sockets
- Pre-wired

Labeling

- UL-CUL Dry location listed

Progress Lighting
701 Millennium Blvd.
Greenville, South Carolina
29607

www.progresslighting.com

Rev. 08/13

Date Submitted: Sept. 2, 2015

Distributor: C.E.D. Columbus, Oh 43207

Contractor: Vaughn Industries

Job Name: OSU NBDT Building B

Submitted by Lighting Systems of Columbus

Lighting Systems
of Columbus, Inc.**Job Name:**OHIO STATE UNIVERSITY NORTH RESIDENTIAL
DISTRICT TRANSFORMATION**Catalog Number:**

VP-610VF32-E1-BA-WHT


Notes:

Type:**A42**

LSC14-37947

Project Name: _____

Type: _____

DIMENSIONS**CYLINDER STYLES****OPEN OR OPEN BAFFLED**

Pendant Mount


6" Aperture

VP610VF Pendant Mount, 6"x10",
Vertical, CF**Finish Options**

SCL Specular Clear "Alzak"
SGC Soft Glow Clear
ECL Etch Clear
WHT White Reflector

Baffle Finish OptionsSpecify reflector finish option - see above,
then add baffle finish color

BL Black Baffle
WH White Baffle

**FEATURES**

Housing - .064" thick spun aluminum cylinder. Polyester powdercoat exterior finish with factory standard colors White (WHT), Black (BLK), Bronze (BZ), Silver (CS).

Socket - Thermo-plastic and positive locking. UL Listed.

Ballast - Electronic ballast, Class P, 50/60 HZ-120/277, Programmed Start, thermally protected, 98% Power Factor, 1.00 Ballast Factor, <10% THD, Class A sound rated. Minimum starting temperature -18°C/0°F. UL Listed component.

Reflector - Heavy gauge hand spun aluminum reflector with a specular "Alzak" low iridescent finish.

Pendant Mount - Pendant mount accepts slope ceilings with a 45 swivel adjustment. L* - Factory Standard stem length is 12".

Features

Manufactured and Listed to UL 1598, ETL and CSA standards.
Suitable for Damp Locations
Wet location under covered ceiling

**ORDERING INFORMATION**

EXAMPLE: VP610VF13E1-2-WHT-SCL

Wattage	Mounting	Housing	Ballast	Color	Finish	Baffle	Options
13	VP	610VF13	E1-2	WHT	SCL	BL	REM
18		610VF18	E3	BLK	SGC	WH	
26		610VF26	DL	BZ	ECL		
32		610VF32	DAX1	BA	WHT		
			DAX2	CS			
			DA7				

Specify Baffle Color

advise baffle color?

Ballast Options

Electronic 120-277 volt is standard

E1-2 - Electronic (120-277V)
E3 - Electronic (347V)

Dimming Ballast Options

DL - Lutron Eco System (120-277V)
DAX1 - Advance Mark X (120V)
DAX2 - Advance Mark X (277V)
DA7 - Advance Mark VII (120-277V)

DL-Lutron Specify Wattage

Ballast is remote in the canopy.

Options Descriptions

REM - Remote Emergency Battery

Vantage reserves the right to change components, finishes or design details in any manner which does not alter the installed appearance or reduce performance and intended function.

▲ See Options pages for other options and finishes.
Vantage recommends the use of Philips or Sylvania lamps.

VANTAGE LIGHTING INC

VANTAGE.LTG.COM

Date Submitted: Sept. 2, 2015

Distributor: C.E.D. Columbus, Oh 43207

6"x10"

6"x10" VERTICAL FLUORESCENT CYLINDER

Rev 05/14
229

Contractor: Vaughn Industries

Job Name: OSU NRD Building B

Submitted by Lighting Systems of Columbus

Lighting Systems
of Columbus, Inc.**Job Name:**OHIO STATE UNIVERSITY NORTH RESIDENTIAL
DISTRICT TRANSFORMATION**Catalog Number:**

44 0902

Notes:


Type:**A45**

LSC14-37947

KIORA**A SPECIFY LAMP/LUMINAIRE TYPE**

Code:	Lamp:	Weight:	Photometry:
44 0902	1 x 26/32/42W PL-T	2.0Kg/4.4lb	File# 440902
44 0903	1 x 57W PL-T	2.0Kg/4.4lb	File# 440903

Example Specification Code: 44 0902

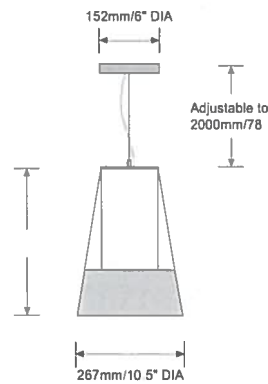INTERIOR
PENDANTS

WWW.BETACALCO.COM | © 2011 BETA-CALCO INC.

75

Contractor: Vaughn Industries

Job Name: OSU NRD Building B

Submitted by Lighting Systems of Columbus

Lighting Systems
of Columbus, Inc.**Job Name:**OHIO STATE UNIVERSITY NORTH RESIDENTIAL
DISTRICT TRANSFORMATION**Catalog Number:**

44 0902 LP32T35KSYL FSDFI

Notes:

Type:**A45**

LSC14-37947

**GENERAL SPECIFICATION****Outer diffuser:** Injection moulded clear acrylic with an etched lower band.**Internal diffuser:** Injection moulded opal acrylic.**Suspension:** Single stainless steel cable.**Power cable:** Silver braided.**Canopy finish:** White powder coated paint.**Reflector:** Aluminum, frosted finish with vertical facets.**Ballasts:** HPF, high frequency electronic ballasts for multiple types and voltages 120-277V.**Mechanical:** Mounts directly to a junction box (by others) hardware (by others).**Approvals:** ETL.MULTI-ARM
Page 206

Contractor: Vaughn Industries

Job Name: OSU NRD Building B

Submitted by Lighting Systems of Columbus

Lighting Systems
of Columbus, Inc.**Job Name:**OHIO STATE UNIVERSITY NORTH RESIDENTIAL
DISTRICT TRANSFORMATION**Catalog Number:**

137215MC/MP

Notes:

Type:**A46**

LSC14-37947

BRUCK.

Job Name:

Contact:

Fixture Type:

Part Number:

LEDRA® CHROMA II

**Description:**

The Bruck Chroma II 6.5W LED pendant is Uni-Light fixture with 40° beam spread. Industry best color quality and consistency is achieved through the use of single source LED module with cold remote phosphor technology for +50K hours of life. Integral driver allows fixture to work on all Bruck tracks with standard 12VAC transformers using the appropriate adaptor. Operates with magnetic transformer.


[Click here for Wila 621 LED 4" and 6" high output downlights with up to 1500 lm using Chroma technology.](#)

Ordering Code:

Choose the desired light source, shade color, finish, and mounting from the options below.
example: 137 - 215 - bz - MP

Light Source:137  LED, warm white, 3000k**Shade Colors:**

215 metal shade

Finish:bz  bronzemc  matte chrome**Mounting Options:**

MP 4" Kiss Canopy

Contractor: Vaughn Industries

Job Name: OSU NRDIT Building B

Submitted by Lighting Systems of Columbus

Lighting Systems
of Columbus, Inc.**Job Name:**OHIO STATE UNIVERSITY NORTH RESIDENTIAL
DISTRICT TRANSFORMATION**Catalog Number:**

137215MC/MP

Notes:

Type:**A46**

LSC14-37947

BRUCK.

Job Name:

Contact:

Fixture Type:

Part Number:

3W DC DRIVER for LED FIXTURES

**Description:**

The 3 watt driver is a Class II power supply rated for operating LEDs. It features a universal voltage input and a constant current output. The inherent protection adds reliability to both the driver and LEDs connected. To avoid damaged to LEDs, the number of fixtures connected must be within the range limits listed for the driver and be wired in series. Use 18-20 gauge wire for remote installation up to a maximum of 150ft. National and local codes must be followed when mounting driver inside a junction box. Please contact manufacturer for further details. [Click Here for LED Driver Matrix.](#)

Part Numbers:**70415**

3W, for 1(3watt LED)

Technical Specs:

100-240V AC, 50/60Hz input

700mA DC constant current output

6VA, 3W for 1(3watt LED)

Operating temperature: -4°F to 140°F

Class II rated


Suitable for dry location only

Short circuit protection

Overload protection

Over-voltage protection

Thermal protection



Contractor: Vaughn Industries

Job Name: OSU NRD Building B

Submitted by Spectrum Lighting, Inc.


Job Name:
OSU - NRD BUILDINGS
Catalog Number:LPLUU-S-4'-IFSO-R-DG-DFSO-R-
WD-120-AL

Notes:

Type:**A48**

SPEC14-5147

LIGHTPLANE LINEAR - Up & Under

Page 1 of 3

TYPE: **1. Style:**

LPLUU-S

- ☐ LPLUU-S - Lightplane Up and Under Suspended (LPLUU-S)
☐ LPLUU-W - Lightplane Up and Under Wall (LPLUU-W)

2. Overall Run Length:


4'

- ☐ Individual (2', 3', 4', 5', 6', 7', 8')
☐ Continuous (Enter total run length, i.e. 20')

3. Indirect Lamping Option:

IFSO

- ☐ N/A - Open channel for downlighting only (N/A)
☐ IFSO - Fluorescent - Standard Output (IFSO)
☐ IFHO - Fluorescent - High Output (IFHO)
☐ IHP7 - 80 LPW High Performance LED White 3500° 7W/LF (IHP7)
☐ IHP14 - 80 LPW High Performance LED White 3500° 14W/LF (IHP14)
☐ IRGB - LED Color Changing (RGB)-Consult Factory for Control Interface Options (IRGB)
☐ IT8 - Fluorescent T8 (IT8)
☐ ILXHO - Seamlessline lamp (ILXHO Feelux High Output)*
☐ ILXHE - Seamlessline lamp (ILXHE Feelux High Efficiency)*
 *See Option 1A

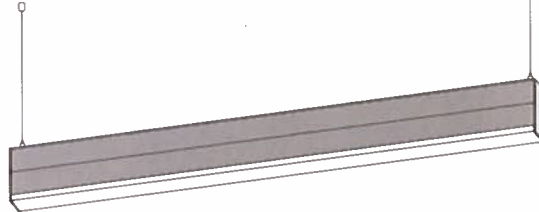**4. Indirect Lamp Configuration:**


R

- ☐ R - Regular (R)
☐ S - Staggered (S)

5. Indirect Lens Option:

DG

- ☐ WD - Saline Lens (WD)
☐ *EXT - Extra Diffuse, Opal Lens (EXT)
☐ RO - Open top Reflector Only (RO)
☐ DG - Flush guard lens - Indirect only (DG)
 *The EXT Option is best for minimal lamp image.

**6. Indirect Ballast Specification:**

ISTD

- ☐ ILED - LED Power Supply, non-dim (ILED)
☐ ILED-DIM - LED Power Supply with 0-10V dimming (ILED-DIM)
☐ ISTD - Standard Electronic, non-dim <10%THD (ISTD)
☐ IRGBSEQ - RGB with integral sequencer, no control (IRGBSEQ)
☐ IRGBDIM - RGB with 0-10V Dimming Control Wires (controllers not included) (IRGBDIM)
☐ IRGBDMX - RGB with DMX Interface module (DMX controller not included) (IRGBDMX)
☐ *IMK7 - Advance Mark 7® Dimming 0-10V (IMK7)
☐ *IMK10 - Advance Mark 10® Dimming (IMK10)
☐ *IHILUME3D - Lutron Hilume 3-D® (IHILUME3D)
☐ **IHILUME-A - Lutron Hilume A Series LED® (IHILUME-A)
☐ *IHSeries - Lutron H-SERIES® Dimming (IHSeries)
☐ *IECOSYS - Lutron ECOSYSTEM® Dimming (IECOSYS)
☐ *IBALSTAR - Ballastar® Light level switching (IBALSTAR)
☐ *IUSD - Superdim® Dimming (IUSD)
☐ *IQUICK - Osram Quicktronic® Dimming (IQUICK)
 *Please consult ballast manufacturer for lamp/ballast compatibility.
 ** OPTION FOR LINEAR LED ONLY

7. Direct Lamping Option:

DFSO

- ☐ N/A - Open channel for downlighting only (N/A)
☐ DFSD - Fluorescent - Standard Output (DFSD)
☐ DFHO - Fluorescent - High Output (DFHO)
☐ **DHP7 - 80 LPW High Performance LED White 3500° 7W/LF (DHP7)
☐ DHP14 - 80 LPW High Performance LED White 3500° 14W/LF (DHP14)
☐ DMR16 - 50 W MR16 Halogen (DMR16)
☐ DLED MR16 - 6W LED MR16 GU5.3 Base (DLEDMR16)
☐ DRGB - LED Color Changing (DRGB)-Consult Factory for Control Interface Options
☐ DT8 - Fluorescent T8 (DT8)
☐ DXHO - Seamlessline lamp (DXHO Feelux High Output)*
☐ DXHE - Seamlessline lamp (DXHE Feelux High Efficiency)*
 *See Option 1A

Continued on Next Page...

8FT suspension hardware Included
Canopy to cover 4-O Junction Box
Design Specifications**Construction**

Extruded architectural grade T6061 aluminum. Minimum wall thickness is .080" 100% recyclable.
 Reflectors are formed from .040 aluminum and finished in Titanium white powdercoat.
 Lenses are made from twin layered extruded high-impact acrylic.
 WD is a full frosted/transparent combination.
 EXT is a half frosted/white combination.
 Single piece construction aluminum louver with clear matte anodized finish.

Electrical Details

All ballasts are electronic <10% THD.
 Class P electronic ballasts - Programmed start
 Standard and dimming ballasts are integral to channel (unless otherwise noted).
 LED options available (consult factory)
 Multiple interface options available including dimming, motion sensing, daylight harvesting and DALI.
 ETL listed
 Non-lensed units rated for indoor location only.
 Lensed units rated for damp location.

Emergency

Fixtures can be wired for emergency circuit or emergency battery backup.
 Emergency one-lamp ballasts provide 90 minutes of illumination.
 T5/T5HO = initial output of 1300 lumens

Finish

All fixtures are standard in Ultimatte aluminum finish (AL) - A deep etch and two-step clear anodizing process that gives a smooth, clean and durable surface.
 Powder Coat options are available. Consult factory.



Architectural Lighting Works reserves the right to make changes to fixture design, finish and engineering at any time.

Contractor: Vaughn Industries

Job Name: OSU NRD Building B

Submitted by Spectrum Lighting, Inc.


Job Name:
OSU - NRD BUILDINGS

Catalog Number:
LPLUU-S-4'-IFSO-R-DG-DFSO-R-
WD-120-AL
Notes:
Type:
A48

SPEC14-5147

LIGHTPLANE LINEAR - Up and Under

Page 2 of 3


 TYPE:

8. Direct Lamp Configuration:

☒ **R** ☐ R - Regular (R)
☐ S - Staggered (S)

9. Direct Lens Option:

☒ **WD** ☐ WD - Satine Lens (WD)
☐ EXT - Extra Dimse, Opal Lens (EXT)
 *The EXT Option is best for minimal lamp image.

10. Direct Ballast Specification:

☒ **DSTD** ☐ DLED - LED Power Supply, non-dim (DLED)
☐ DLED-DIM - LED Power Supply with 0-10V dimming (DLED-DIM)
☐ DSTD - Standard Electronic, non-dim <10%THD (DSTD)
☐ DRGBSEQ - RGB with integral sequencer, no control (DRGBSEQ)
☐ DRGBDIM - RGB with 0-10V Dimming Control Wires (controllers not included) (DRGBDIM)
☐ DRGBDMX - RGB with DMX Interface module (DMX controller not included) (DRGBDMX)
☐ *DMK7 - Advance Mark 7® Dimming 0-10V (DMK7)
☐ *DMK10 - Advance Mark 10® Dimming (DMK10)
☐ *DHILUME3D - Lutron Hilume 3-D® (DHILUME3D)
☐ **DHILUME-A - Lutron Hilume A Series LED® (DHILUME-A)
☐ *DHSeries - Lutron H-SERIES® Dimming (DHSeries)
☐ *DECOSYS - Lutron ECOSYSTEM® Dimming (DECOSYS)
☐ *DBALSTAR - Ballastar® Light level switching (DBALSTAR)
☐ *DUSD - Superdim® Dimming (DUSD)
☐ *DQUICK - Osram Quicktronic® Dimming (DQUICK)
 *Please consult ballast manufacturer for lamp/ballast compatibility.
 **OPTION FOR LINEAR LED ONLY

11. Voltage:

☒ **120** ☐ 120 (120V)
☐ 277 (277V)
☐ UNV (120/277 V)
☐ 347 (347V non-dim only)

12.. Finish:

☒ **AL** ☐ *AL (Natural "Ultimate" aluminum)
☐ BK (Black powdercoat)
☐ WH (White powdercoat)
☐ RAL (Specify RAL # of powdercoat of your choice)

*AL is standard on all LPL product

Lamp Configuration Chart: Individual and Continuous

Regular	2'	3'	4'	5'	6'	7'	8'	9'	10'	11'	12'
14 or 24w T5	1										
21 or 39w T5		1			2	1		3		1	
28 or 54w T5			1			1	2		2	2	3
35 or 80w T5				1							

Staggered	2'	3'	4'	5'	6'	7'	8'	9'	10'	11'	12'
14 or 24w T5											
21 or 39w T5					1		3	2	1		3
28 or 54w T5					1	2		1	2	3	1
35 or 80w T5											

Design Specifications

Construction

Extruded architectural grade T6061 aluminum. Minimum wall thickness is .080" 100% recyclable.
 Reflectors are formed from .040 aluminum and finished in Titanium white powdercoat.
 Lenses are made from twin layered extruded high-impact acrylic.
 WD is a full frosted/transparent combination.
 EXT is a half frosted/white combination.
 Single piece construction aluminum louver with clear matte anodized finish.

Electrical Details

All ballasts are electronic <10% THD
 Class P electronic ballasts - Programmed start
 Standard and dimming ballasts are integral to channel (unless otherwise noted).
 LED options available (consult factory)
 Multiple interface options available including dimming, motion sensing, daylight harvesting and DALI.
 ETL Listed
 Non-lensed units rated for indoor location only.
 Lensed units rated for damp location.

Emergency


Fixtures can be wired for emergency circuit or emergency battery backup.
 Emergency one-lamp ballasts provide 90 minutes of illumination.
 T5/T5HO = Initial output of 1300 Lumens

Finish


All fixtures are standard in Ultimate aluminum finish (AL) - A deep etch and two-step clear anodizing process that gives a smooth, clean and durable surface.
 Powder Coat options are available. Consult factory.



*1A - Option: Seamlesline Lamp (LX) End to End Lamp Mounting



*Channel dimensions identical to standard T5 lampping. Luminous ends eliminate the need for staggered lampping. Consult factory for additional details



Spacing Criterion 1.2
 1.3
 Efficiency 74.9 %
 Catalog # LPLUU-4-FSO-RO-WD

Architectural Lighting Works reserves the right to make changes to fixture design, finish and engineering at any time.

Contractor: Vaughn Industries

Job Name: OSU NRD Building B

Submitted by Spectrum Lighting, Inc.



Job Name:
OSU - NRD BUILDINGS

Catalog Number:
LPLUU-S-4'-IFSO-R-DG-DFSO-R-
WD-120-AL
Notes:

Type:**A48**

SPEC14-5147

LIGHTPLANE LINEAR - Up and Under

Page 3 of 3



Standard: Pendant Wire Mounting with adjustable aircraft cable suspension

TYPE: 

*4-1/2" dia. canopy to cover 4-0 Octagon Junction box - Bullet Aircraft cable suspension.

*Adjustable Grip-Lock cable suspension

*8FT suspension hardware is standard on all ALW suspended fixtures

Option: Seismic Bracing

Option: Mitered Angles



Aircraft cable can mount on side of channel to seismic anchoring.



Consult Factory for angle options.

Colors and Finishes:



STANDARD: "Ullimate" Natural aluminum: A two step, clear anodizing process that gives and durable surface.



OPTION: Black - BK powdercoat

OPTION: White - WH powdercoat

RAL

OPTION: RAL - powdercoat the RAL color of your choice. Specify RAL code.



Architectural Lighting Works reserves the right to make changes to fixture design, finish and engineering at any time.

Date Submitted: Sept. 2, 2015

www.archlightworks.com

Distributor: C.E.D. Columbus, Oh 43207

Contractor: Vaughn Industries

PANEL LUMINAIRES

LM22 - 2 X 2 LIGHT PANEL SERIES

FEATURES


CONSTRUCTION

- Side lit design for an ultra thin profile
- IC rated, IP44-suitable for damp or dry locations
- Wide beam angle (120°) for better spacing
- CE and cULus rated
- RoHS compliant
- 5 year warranty (standard)

ELECTRICAL

- Dimmable (via driver or using PWM) ⁽¹⁾
- Constant voltage design allows for multiple lights per driver
- LM-80 and LM-79 available
- Panels should be placed within 50 feet of driver
- Rated at 60W max. AC power (51W DC) ⁽¹⁾

2X2



Project Name	OSU - NRDT
Date	
Type	B1

T/LT

TILT Part Number	L GM 22 35 W
TILT Driver	LD60

LUMEN PACKAGES (2X2) ⁽³⁾					
CCT	50,000 hours (L70)				
	STANDARD 90+ CRI, R9 >50				
5000k	Lumens	4700	4157	3736	2775
	LPW	74.1	79.2	82	87.5
4000k	Lumens	4550	4298	3837	2847
	LPW	77.3	78.4	80.4	87.7
3500k	Lumens	4225	3829	3426	2542
	LPW	72.5	75.2	77.4	84.8
3000k	Lumens	3900	3360	3016	2237
	LPW	67.6	71.5	73.9	81.4

ORDERING INFORMATION

L	GM	22	50	W
Fixture Type	Mounting Type	Size	CCT	Frame Color ⁽⁴⁾
L - Light	GM - Grid Mount	22 - 2' x 2'	50 - 5,000K 40 - 4,000K 35 - 3,500K 30 - 3,000K	W - White B - Black S - Silver + - special order

USE WITH

Driver	
LD60	LD60PE7
LD60P	LD90PE7
LD90	LD100PE7
LD100P	

DRIVER SPECIFICATION

NOTE on DRIVERS: UL 8750, short circuit, over current, over voltage, and over temperature protection
UL recognized and CE rated, RoHS compliant
Class II, SELV, IP67

Model ⁽⁵⁾	Size in Inches (LxWxH)	AC Input	DC Output	Dimming ⁽⁹⁾	Temp	Max Fixtures ⁽⁸⁾
LD60	6.50 x 1.63 x 1.26	90 - 305V	60W	1-10V	-40C - 60C	1
LD60P	12.50 x 2.38 x 1.50	90 - 305V	60W	1-10V	-40C - 70C	1
LD90	6.34 x 2.40 x 1.26	90 - 305V	90W	1-10V	-40C - 60C	1
LD100P	14.50 x 2.63 x 1.58	90 - 305V	100W	1-10V	-40C - 60C	2

Emergency ⁽⁷⁾	Size in Inches (LxWxH)	AC Input	Output ⁽⁶⁾	Lumens	Temp	Max Fixtures ⁽⁸⁾
LD60PE7	13.00 x 5.50 x 1.75	90 - 305V	7W for 90 mins	400 - 600	0C - 50C	1
LD90PE7	13.00 x 5.50 x 1.75	90 - 305V	7W for 90 mins	400 - 600	0C - 50C	1
LD100PE7	13.00 x 5.50 x 1.75	90 - 305V	7W for 90 mins	400 - 600	0C - 50C	2

NOTES (NUMBERS)

- (1) See driver or dimming product sheet for specific details
- (2) AC W used for circuit power, DC W used for driver circuit
- (3) Lumen packages provided using Dim Chip with driver
- (4) Colors other than white are custom
- (9) TILT drivers use a 1-10V control but are compatible with most 0-10V control systems. For details specific to your system, contact us at 855.440.8458

- (5) "P" designation after watt rating denotes Plenum Rated
- (6) Based on watt load of fixtures and driver output
- (7) See Product Sheet for Emergency Drivers
- (8) Safe amount of fixtures per driver




Contractor: Vaughn Industries

Job Name: OSU NRD T Building B

TILT PANEL LUMINAIRE LM22

PHOTOMETRIC CHARTS WITH TESTING DATA. CALL FOR SPECIFIC INFORMATION NOT LISTED HERE: 855.440.8458

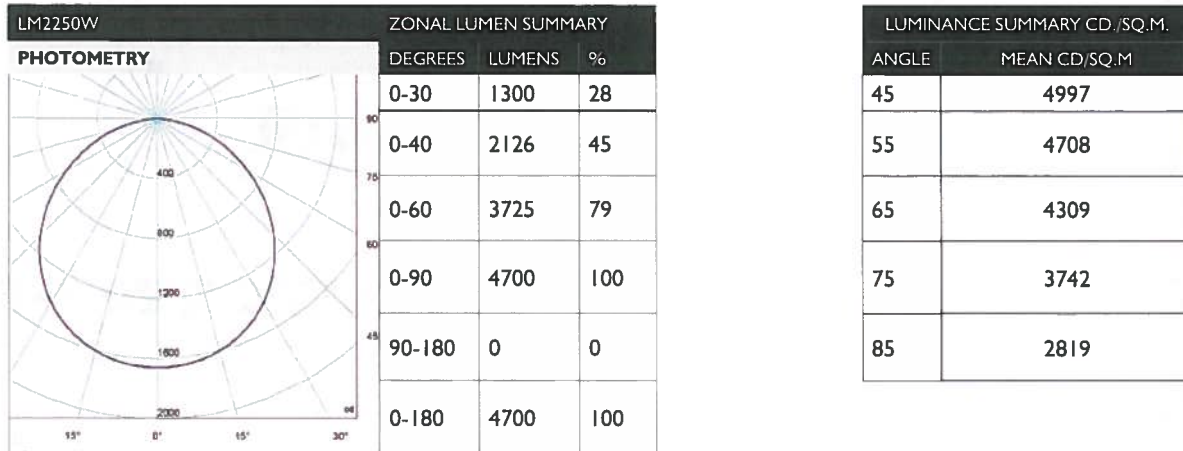

	COEFFICIENT OF UTILIZATION								
	80%			70%			50%		
	70	50	30	70	50	30	70	50	30
0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11
1	1.09	1.05	1.01	1.07	1.03	0.99	0.98	0.95	0.92
2	1.00	0.92	0.86	0.98	0.90	0.85	0.87	0.82	0.78
3	0.91	0.81	0.74	0.89	0.80	0.73	0.77	0.71	0.66
4	0.84	0.73	0.65	0.82	0.72	0.64	0.69	0.62	0.57
5	0.78	0.65	0.56	0.75	0.64	0.56	0.62	0.55	0.49
6	0.71	0.58	0.50	0.69	0.57	0.49	0.56	0.48	0.43
7	0.66	0.52	0.44	0.64	0.51	0.43	0.50	0.42	0.37
8	0.61	0.47	0.39	0.59	0.47	0.39	0.45	0.38	0.33
9	0.56	0.43	0.35	0.55	0.42	0.35	0.41	0.34	0.29
10	0.52	0.39	0.31	0.51	0.39	0.31	0.38	0.31	0.26

NOTES

- Lifespan: 50,000 hrs (L70)
- LM79 and LM80 available upon request. Call 855.440.8458
- IES files available online at: laurenillumination.com/resources




Lauren Illumination is a Lauren International Company
 ©Lauren Illumination and ©TILT are registered trademarks of Lauren Illumination
 2162 Reiser Avenue SE | New Philadelphia, OH 44663 P: 855.440.8458 | F: 330.339.1515
laurenillumination.com | laureninternational.com

CONSTANT VOLTAGE DRIVERS

PRODUCT DATA SHEETS

FEATURES

- 24V constant voltage power supply
- Protections include:
 - Short circuit / over current / over voltage / over temperature
- Class II power unit, SELV rated
- Built in active PFC function
- Dimmable (see chart below)
- UL recognized
- RoHS compliant
- CE rated
- 5-year warranty

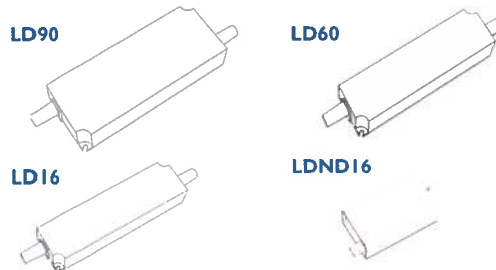

Project Name	OSU - NRDT
Date	
Type	A1

T/LT

TILT Part Number	LD60
------------------	------

Constant Voltage Driver Models:

LD90
LD60
LD16
LDND16 (Non Dim)

SPECIFICATIONS

ALL PLENUM MODELS	LD60	LD90	LD16	LDND16 (Non Dim)
Length x Width (in)	6.500" x 1.750"	6.500" x 2.375"	6.00" x 1.625"	3.00" x 1.50"
Height (in)	1.250"	1.500"	1.250"	1.125"
IP Rating	IP67	IP67	IP30	IP30
DC output supply (V)	60	90	16	16
AC input voltage range	90 - 305VAC	90-305VAC	90-305VAC	90 - 264VAC
AC inrush current (max) Cold start	75A @ 230VAC	70A @ 230VAC	50A @ 230VAC	70A @ 230VAC
Safety standards	UL 8750	UL 8750	UL 8750	UL 8750
Protections	Short circuit/over current/over voltage/over temperature			
Thermal Operation	-40°C - 50°C	-40°C - 50°C	-40°C - 50°C	-40°C - 50°C
Thermal Shutdown	75°C	70°C	70°C	70°C

FOR USE WITH

LUMINAIRE	CV DRIVER	MAX # UNITS	CV DRIVER	MAX # UNITS	CV DRIVER	MAX # UNITS
LCLCV6	LD16, LDND16	1	LD60	5	LD90	8
LCLCV8	LD16, LDND16	1	LD60	4	LD90	6
LGM22	LD16, LDND16	0	LD60	1	LD90	1
LGM24	LD16, LDND16	0	LD60	0	LD90	1
LGM14	LD16, LDND16	0	LD60	1	LD90	1

DIMMER COMPATIBILITY CHART

BRAND	MODEL
TILT	WLVD
TILT	DIM CHIP (DC01, DC02, DC03)
LEVITON (0-10V)	IP-710*
LUTRON (0-10V)	DVSTV*

*TILT drivers use a 1-10V control but are compatible with most 0-10V control systems.
For details specific to your system, contact us at 855.440.8458





Contractor: Vaughn Industries

Job Name: OSU NRD Building B

CONSTANT VOLTAGE DRIVERS LD90, LD60, LD16, LDND16**CONNECTING CONSTANT VOLTAGE DRIVERS - DC WIRING****CLOSE-UP DC WIRING DETAIL**

SEE INSTALLATION MANUAL FOR APPROVED INSTALLATION METHODS AND OTHER DETAILS FOR ALL DRIVERS

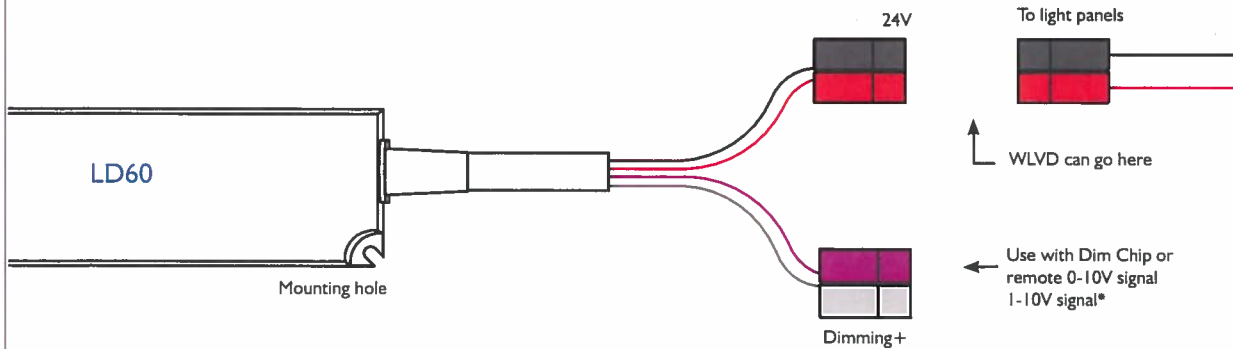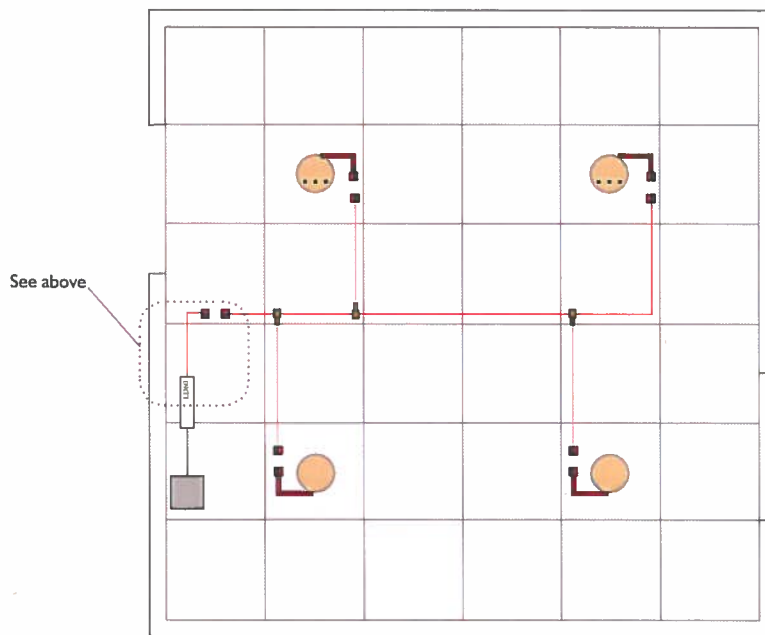**SAMPLE ROOM LAYOUT WITH DRIVERS INSTALLED****NOTES**

- Lights should be placed within 50 feet of driver
- Wattage load (lights) should not exceed wattage of driver
- + TILT drivers use 1-10V. They will accept 0-10V signals. Operation from 0-1V will depend on the system being used. For details specific to your system, call us at 855.440.8458



©TILT is a registered product brand
of Lauren Illumination



Lauren Illumination is a Lauren International Company
2162 Reiser Avenue SE | New Philadelphia, OH 44663
P: 855.440.8458 | F: 330.339.1515
laurenillumination.com | laureninternational.com

Contractor: Vaughn Industries

Job Name: OSU NRD Building B

Submitted by Lighting Systems of Columbus

Lighting Systems
of Columbus, Inc.**Job Name:**OHIO STATE UNIVERSITY NORTH RESIDENTIAL
DISTRICT TRANSFORMATION**Catalog Number:**STE14-232G-MPO-EPUQHESPN-
FO835SYL


Notes:

Type:**B2**

LSC14-37947

Columbia
LIGHTING**STE14**

1' x 4' Stratus® Recessed Indirect / 1, 2, or 3-Lamp T5, T5HO, T8

**wiHUBB**

- Precision optical design produces high efficiency in a high visual comfort architecturally styled direct/indirect distribution
- Custom perforated metal basket with high transmission lamp-obscuring overlay
- Optimized coating process and unique paint formulation provide exceptional reflectivity in a matte finish for a soft visual image and balanced basket and reflector illumination
- Completely recessed, provides a clean ceiling with uniform illumination at mounting heights as low as 8 feet
- Available for use with T8, T5 or T5HO linear fluorescent lamps
- Optional acrylic dust guard pivots to seal lamp compartment against contaminants especially for schools, medical facilities and public spaces
- Companion Louvered (STEL), side basket (STS) and pendant (STP) models available
- Available with exclusive wiHUBB technology preinstalled
 - Peer to peer, self-healing wireless mesh network
 - Integrated control system for 0-10VDC or step dimming, or On/Off

PROJECT INFORMATION

Project Name

Type

Catalog No.

Date

CONSTRUCTION

Luminaire housing and end caps are die formed code gauge cold rolled steel. The sturdy reflector is stiffened with linear forms, profiled to a precision curve. Perforated basket with high transmission overlay for improved optical efficiency plus lamp obscuration. Basket and all reflective surfaces are finished after fabrication with unique formula high reflectivity matte white paint for soft, uniform indirect illumination.

Thermoplastic light traps snap into the housing at both ends of the basket to prevent light leaks. Basket hinges down for easy access to center wireway.

INSTALLATION

An access plate is furnished with each luminaire for fast wiring access from the plenum. No need to open fixture.

BALLASTS

Energy efficient, thermally protected, automatic resetting, Class P, high power factor, sound rated A, magnetic or electronic ballasts. CEE NEMA Premium compliant.

ELECTRICAL

Standard class "P", thermally protected, autoresetting HPF ballast, sound rated A. CEE NEMA Premium compliant. All ballast leads extend a minimum of 6" through access location. NEC/CEC compliant ballast disconnect is standard.

CEILING COMPATIBILITY

NEC-compliant T-Bar clips supplied with all grid trim fixtures. See ceiling details on reverse. For type SG ceilings order G trim. Fixture will be regressed 3/8" from the face of the ceiling tee. For hard ceilings order G trim and FK flange accessory. Assemble then support FK accessory at the ceiling plane using tie wires (by others). Contact your Columbia representative for compatibility information for specific ceiling types or for continuous row applications in hard ceilings.

CERTIFICATION

All luminaires are built to UL 1598 standards and bear appropriate UL and cUL or CSA labels. Damp location labeling is standard. Emergency-equipped fixtures labeled UL 924.

ORDERING INFORMATION**EXAMPLE STE14-232G-MPO-EU**

STE		14	-	MPO		-	-	-
MODEL		NO. OF LAMPS IN CROSS SECTION		CEILING TYPE	CEILINGING	VOLTAGE	OPTIONS	
STE Stratus® E-Series Recessed Indirect		1 One 2 Two 3 Three		G Grid Lay-in SM Surface Mount	MPO Metal Perf w/Overlay	U 120V-277V 347 347V	GLR Fast Blow Fuse GMF Slow Blow Fuse EL Emergency Battery Pack ELS Emergency Battery Pack, T5 DG Dust Guard Clear Acrylic NYC NYC Compliant NYCU NYC Compliant, Union Label WIH wiHUBB Enabled ¹	
SIZE		LAMP TYPE		BALLAST				
14 1' x 4'		28 4' T5 28 Watt 32 4' T8 32, 30, 28 or 25 Watt 54 4' T5HO 54 or 51 Watt		E Electronic T8, Instant Start ED Electronic Dimming, T8 and T5 EP Electronic T5, T5HO or T8, Programmed Start				

EPUQHESPN - Sylvania Programmed Start Ballast

FO835SYL- Sylvania Lamps Installed

**ACCESSORIES
(ORDER SEPARATELY)****FK14** 1' x 4' Single Flange Kit¹ Not available with Surface Mount Ceiling Types

Page 1/2 Rev. 03/20/13

RECESSED ARCHITECTURAL / STE14

© 2013 Columbia Lighting, a division of Hubbell Lighting, Inc. Because of continuing product improvement programs, Columbia Lighting reserves the right to change specifications without notice. 701 Millennium Blvd. Greenville, SC 29607 / Tel 864.678.1000 / Website www.columbialighting.com



Contractor: Vaughn Industries

Job Name: OSU NRD Building B

Submitted by Lighting Systems of Columbus

Lighting Systems
of Columbus, Inc.**Job Name:**OHIO STATE UNIVERSITY NORTH RESIDENTIAL
DISTRICT TRANSFORMATION**Catalog Number:**STE14-232G-MPO-EPUQHEPSN-
FO835SYL

Notes: 2-F32T8/835 LAMPS INCLUDED

Type:**B2**

LSC14-37947

Columbia
LIGHTING**STE14**

1' x 4' Stratus® Recessed Indirect / 1, 2, or 3-Lamp T5, T5HO, T8

PHOTOMETRIC DATA

Test 3849 Test Date 2/4/11

LUMINAIRE DATA


Luminaire	STE14-232G-MPO-EU
Ballast	STE Stratus® E-Series, Recessed Architectural
Ballast Factor	0.88
Lamp	1 x 4 2-lamp with perforated metal basket and opal overlay
Lumens per Lamp	B2321UNVHP-B
Watts	0.88
Shielding Angle	F28T8
Spacing Criterion	2725
Luminous Opening in Feet	47
	0° = 90 90° = 90
	0° = 1.23 90° = 1.21
	Length: 4.00
	Width: 0.92
	Height: 0.00

ZONAL LUMEN SUMMARY

Zone	Lumens	% Lamp	% Fixt.
0-30	1137	20.9	29.1
0-40	1842	33.8	47.2
0-60	3164	58.1	81.1
0-90	3903	71.6	100.0
0-180	3903	71.6	100.0

ENERGY DATA

Total Luminaire Efficiency	71.6%
Luminaire Efficacy Rating (LER)	73
IESNA RP-1-1993 Compliance	Noncompliant
Comparative Yearly Lighting Energy Cost per 1000 Lumens	\$3.29 based on 3000 hrs. and \$0.08 per KWH

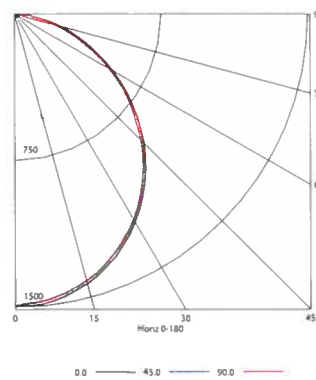INDOOR CANDELA PLOT**AVG. LUMINANCE (Candela/Sq. M.)**


Average Luminance Angle	0.0	22.5	45.0	67.5	90.0
0	4361	4361	4361	4361	4361
30	4151	4114	4087	4104	4107
40	3979	3914	3902	3898	3914
45	3872	3789	3773	3814	3843
50	3731	3640	3613	3704	3709
55	3585	3473	3488	3514	3493
60	3387	3264	3305	3270	3253
65	3177	2997	3066	3018	2983
70	2968	2771	2797	2720	2685
75	2712	2486	2475	2418	2396
80	2274	2173	2173	2139	2139
85	1510	1913	2114	2114	2114

COEFFICIENTS OF UTILIZATION (%)


RC	RW	80				70				50				0
		70	50	30	10	70	50	30	10	50	30	10	0	
	1	78	75	72	69	76	73	70	68	70	68	66	60	
	2	71	65	61	57	69	64	60	56	62	58	55	51	
	3	65	58	52	47	63	57	51	47	54	50	46	43	
	4	60	51	45	40	58	50	45	40	48	43	40	37	
	5	55	46	40	35	53	45	39	35	44	38	34	32	
	6	51	41	35	31	49	41	35	30	39	34	30	28	
	7	47	38	31	27	46	37	31	27	36	31	27	25	
	8	44	34	28	24	43	34	28	24	33	28	24	22	
9	41	32	26	22	40	31	26	22	30	25	22	20		
10	39	29	24	20	38	29	23	20	28	23	20	18		

RCR = Room Cavity Ratio


RC = Effective Ceiling Cavity Reflectance RW = Wall Reflectance

DIMENSIONAL DATA1' x 4', 2-Lamp, Lay-In
Recessed

Surface


**CEILING COMPATIBILITY**

Type G



For lay-in installation in exposed grid ceilings. Maximum tee widths of 1" and maximum heights of 1 1/2" allowed.

FK14 Flange Kit



For hard ceiling applications, fixtures must be ordered with a flange kit that wires directly into the concealed ceiling opening for a clean finished appearance. For row configurations contact your local Columbia Representative.


Type SG



For 5/8" slot grid type ceilings. Luminaire will be regressed 3/8" horizontal surface of the tee.

Flange kit cut out dimension for single FK14 only: 12 3/4" x 48 3/4"

Top View

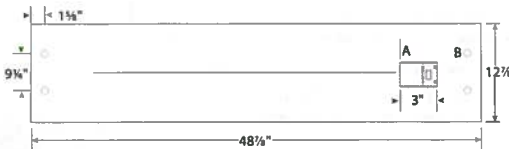

Surface Mount K.O. Dimensions

A: 2" x 3" Access with (2) 1/2" Mount Supply Knockouts
B: 1/4" Mounting holes (4) for surface or cable mounting**NOTE:** All dimensions are in inches; dimensions and specifications are subject to change without notice. Please consult factory or check sample for verification.

Page 2/2 Rev 03/20/13

RECESSED ARCHITECTURAL / STE14

© 2013 Columbia Lighting, a division of Hubbell Lighting, Inc. Because of continuing product improvement programs, Columbia Lighting reserves the right to change specifications without notice. 701 Millennium Blvd. Greenville, SC 29607 / Tel 864.678.1000 / Website www.columbialighting.com



Contractor: Vaughn Industries

Job Name: OSU NROD Building B

Submitted by Lighting Systems of Columbus

Lighting Systems
of Columbus, Inc.**Job Name:**OHIO STATE UNIVERSITY NORTH RESIDENTIAL
DISTRICT TRANSFORMATION**Catalog Number:**ST824-232G-FSA12125-EPUQHEPSN-
PW-SLL-FO835SYL


Notes: 2-F32T8/835 LAMPS INCLUDED

Type:**B5**

LSC14-37947

Columbia
LIGHTING**ST824-2, ST824-3**

2' x 4' Shallow Specification Troffer / 2 or 3-Lamp T5, T5HO, T8

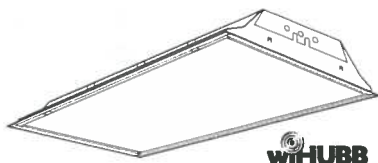

wiHUBB

PROJECT INFORMATION

Project Name

Type

Catalog No.

Date

FEATURES

- Optical performance designed for T8 and T5 lamp technology
- 2 1/8" minimum spacing from bottom of lamp to bottom of lens
- Mechanical light seal
- Mitered corners on door present a clean uninterrupted appearance
- Spring loaded latches optional
- Rolled fixture edges reduce risk of injury during fixture handling and installation
- Integral T-Bar clips quickly secure fixture to grid system without the need for time consuming loose parts
- Snap-on ballast covers can be removed with lamps installed
- Corner hinging for easy insertion and removal of door frame from either side
- Optional flush or regressed aluminum shielding frames available with positive action or spring loaded latches
- Housing ends secured by unique corner interlock and screws
- Available with exclusive wiHUBB technology preinstalled
 - Peer to peer, self-healing wireless mesh network
 - Integrated control system for 0-10VDC or step dimming, On/Off

HOUSING

Heavy gauge steel. Die formed for extra rigidity. Grid housings are designed for installation in standard 1 1/4" T-Bar ceilings. Integral T-Bar clips are located in the end of the housing. Flanged housings for hard ceilings feature overlap flange trim and wing hangers.

BALLASTS

Energy efficient, thermally protected, automatic resetting, Class P, high power factor, sound rated A, magnetic or electronic ballasts. CEE NEMA Premium compliant.

ELECTRICAL

Standard class "P," thermally protected, autoresetting HPF ballast, sound rated A. CEE NEMA Premium compliant. All ballast leads extend a minimum of 6" through access location. NEC/CEC-compliant ballast disconnect is standard.

FINISH

All parts are pre-painted with high gloss baked white enamel, minimum reflectance 86%, applied over iron phosphate pretreatment for maximum adhesion and resistance.

SHIELDING

100% clear prismatic acrylic, extruded and roll-embossed, diagonally oriented female prisms, unless otherwise specified.

CERTIFICATION

All luminaires are built to UL 1598 standards and bear appropriate UL and cUL or CSA labels. Damp location labeling is standard. Emergency-equipped fixtures labeled UL 924.

ORDERING INFORMATION**EXAMPLE ST824-232G-FSA12-EU-F0735-C388**

MODEL	NO. OF LAMPS	CEILING TYPE	SHIELDING	VOLTAGE	OPTIONS
ST8 Shallow Specification Troffer	2 Two 3 Three	G Inverted T-Bar (Std.) F Overlap Flange (4 1/8" overall fixture height)	A12 Pattern 12 Acrylic 0.100" Nominal (Standard) A12.125 Pattern 12 Acrylic 0.125" Nominal A19 Pattern 19 Acrylic 0.15" Male Prism PC1 Silver Parabolic Louver 1/2" x 1/2" x 1/2" PC2 Silver Parabolic Louver 1 1/8" x 1 1/8" x 1"	U 120V-277V 347 347V	F830 T8, 80CRI, 3000K Lamps, Furnished/Installed F835 T8, 80CRI, 3500K Lamps, Furnished/Installed F841 T8, 80CRI, 4100K Lamps, Furnished/Installed GLR Fast Blow Fuse EL Emergency Battery Pack PAF Paint After Fabrication SLL Spring Loaded Latches MS9 Master/Satellite Pair w/ry Harness C388 3/8" Flex with 3 No. 18 Wires C384 3/8" Flex with 4 No. 18 Wires C488 3/8" Flex with 4 No. 18 Wires C424 1/2" Flex with 4 No. 14 Wires M4R Micro™-4 Aluminum Reflector SAR Low Iridescence Specular Alum Reflector NYC IYCC Compliant NYCU IYCC Compliant, Union Label WIH wiHUBB Enabled CP Chicago Plenum
SIZE	LAMP TYPE	SHIELD TYPE			
24 2' x 4'	28 4', T5, 28 Watt 32 4', T8, 32, 30, 28 or 25 Watt 54 4', T5HO 54 or 51 Watt	FS Flush Steel FA Flush Aluminum RA Regressed Aluminum PC Premium Steel			
EPUQHEPSN- Sylvania Programmed Start Ballast					
FO835SYL Sylvania Lamps Installed					
For more shielding see Options and Accessories.					
For specific ballast vendor, show as option.					

*Not available with Surface Mount Ceiling Types.

Page 1/2 Rev. 08/26/14

LENSED TROFFERS / ST824-2, ST824-3

© 2014 Columbia Lighting, a division of Hubbell Lighting, Inc. Because of continuing product improvement programs, Columbia Lighting reserves the right to change specifications without notice. 701 Millennium Blvd. Greenville, SC 29607 / Tel 864.678.1000 / Tech Support 864.678.1668 / Website www.columbialighting.com



Contractor: Vaughn Industries

Job Name: OSU NRD Building B

Submitted by Lighting Systems of Columbus

Lighting Systems
of Columbus, Inc.**Job Name:**OHIO STATE UNIVERSITY NORTH RESIDENTIAL
DISTRICT TRANSFORMATION**Catalog Number:**ST824-232G-FSA12125-EPUQHEPSN-
PW-SLL-F0835SYL

Notes: 2-F32T8/835 LAMPS INCLUDED

Type:**B5**

LSC14-37947

Columbia
LIGHTING**ST824-2, ST824-3**

2' x 4' Shallow Specification Troffer / 2 or 3-Lamp T5, T5HO, T8

PHOTOMETRIC DATA

Test 12581 Test Date 1/08/03

LUMINAIRE DATA


Luminaire	ST824-332G-FSA12 ST8 Lensed Troffer 2' x 4' 3-Lamp with A12 Lens
Ballast	B3321120RH
Ballast Factor	0.88
Lamp	F32T8
Lumens per Lamp	2900
Total Input Watts	84
Mounting	Recessed
Shielding Angle	N/A
Spacing Criterion	0° = 1.24 90° = 1.35

AVG. LUMINANCE (Candela/Sq. M.)

	0.0	22.5	45.0	67.5	90.0
Average Luminance Angle	0	4282	4282	4282	4282
	30	4165	4260	4415	4515
	40	3967	4106	4326	4471
	45	3767	3920	4154	4322
	50	3462	3637	3851	4009
	55	3075	3282	3478	3599
	60	2696	2863	3045	3098
	65	2338	2412	2528	2565
	70	2036	2005	1987	2122
	75	1838	1784	1659	1909
	80	1841	1761	1770	1903
	85	1967	1825	2002	1967

COEFFICIENTS OF UTILIZATION (%)

RC	80	70	50	0
RW	70	50	30	10
1	93	89	86	83
2	85	78	73	69
3	78	69	63	58
4	72	62	55	49
5	66	55	48	43
6	61	50	43	37
7	57	45	38	33
8	53	42	35	30
9	49	38	31	27
10	46	35	29	24

INDOOR CANDELA PLOT

RCR = Room Cavity Ratio

RC = Effective Ceiling Cavity Reflectance RW = Wall Reflectance

ENERGY DATA

Total Luminaire Efficiency	84.7%
Luminaire Efficacy Rating (LER)	77
IESNA RP-1-1993 Compliance	Noncompliant
Comparative Yearly Lighting Energy Cost per 1000 Lumens	\$3.12 based on 3000 hrs. and \$0.08 per KWH

LUMINAIRE DATA


Luminaire	ST824-232G-FSA12 ST8 Lensed Troffer 2' x 4' 2-Lamp with A12 Lens
Ballast	REL-2P32-SC
Ballast Factor	0.88
Lamp	F32T8
Lumens per Lamp	2900
Total Input Watts	58
Shielding Angle	N/A
Spacing Criterion	0° = 1.22 90° = 1.35

AVG. LUMINANCE (Candela/Sq. M.)

	0.0	22.5	45.0	67.5	90.0
Average Luminance Angle	0	3037	3037	3037	3037
	30	2885	2962	3095	3208
	40	2619	2711	2877	3058
	45	2387	2524	2723	2878
	50	2184	2318	2537	2631
	55	1995	2062	2202	2261
	60	1767	1739	1745	1838
	65	1553	1418	1297	1494
	70	1485	1342	1047	1341
	75	1545	1259	1175	1354
	80	1601	1378	1352	1432
	85	1683	1559	1400	1577

COEFFICIENTS OF UTILIZATION (%)

RC	80	70	50	0
RW	70	50	30	10
1	94	90	87	84
2	86	79	74	70
3	79	71	64	59
4	73	63	56	51
5	67	57	49	44
6	62	51	44	39
7	58	47	39	34
8	54	43	36	31
9	50	39	32	28
10	47	36	30	25



INDOOR CANDELA PLOT

RCR = Room Cavity Ratio

RC = Effective Ceiling Cavity Reflectance RW = Wall Reflectance

ENERGY DATA

Total Luminaire Efficiency	85.6%
Luminaire Efficacy Rating (LER)	75
IESNA RP-1-1993 Compliance	Noncompliant
Comparative Yearly Lighting Energy Cost per 1000 Lumens	\$3.20 based on 3000 hrs. and \$0.08 per KWH

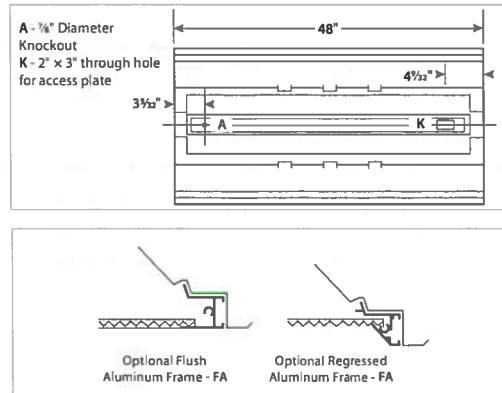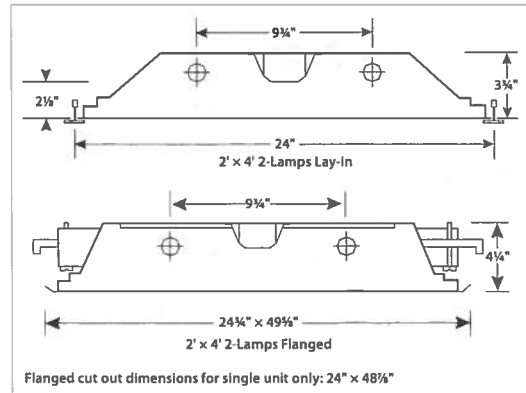DIMENSIONAL DATA


NOTE: All dimensions are in inches; dimensions and specifications are subject to change without notice. Please consult factory or check sample for verification.

Page 2/2 Rev. 08/26/14

LENSED TROFFERS / ST824-2, ST824-3

© 2014 Columbia Lighting, a division of Hubbell Lighting, Inc. Because of continuing product improvement programs, Columbia Lighting reserves the right to change specifications without notice. 701 Millennium Blvd. Greenville, SC 29607 / Tel: 864.678.1000 / Tech Support: 864.678.1668 / Website: www.columbialighting.com



	Project 14-16183-14 Date 10/29/2014 Distributor: Vaughn Industries OSO NRT BUILDING	Job Name: OSO NRT Building	Catalog Number 2AV G 2 17 MDR MVOLT	GEB10PS LP835	Type
	Submitted By LIGHTING UNLIMITED INC	Notes			B15



FEATURES & SPECIFICATIONS

INTENDED USE — The Avante 2x2 is an indoor lighting luminaire for private and open offices, circulation areas, classrooms, libraries, cafeterias, airport ticketing and wait areas, and numerous other commercial applications. Static or air functions available. **Certain airborne contaminants can diminish integrity of acrylic.** [Click here for Acrylic Environmental Compatibility table for suitable uses.](#)

CONSTRUCTION — Housing is gloss white enamel on cold rolled steel. All edges hemmed or rounded. All shieldings pivot on light traps and swing down for easy lamp access.

Molded light traps prevent light leaks between shielding and endplates.

All grid and screw slot units have built-in ceiling grid mounting clips. Grid air and screw slot air fixtures are supplied with screw-on tee bar clips.

OPTICS — Twin matte white polyester powder paint finished reflectors provide uniform light distribution. Optional low brightness diffuse aluminum stepped reflectors available.

All diffusers control direct light distribution and glare by shielding lamps from direct view.

Metal diffuser staggered round holes (MDR) 52% open perforated metal with .075" diameter holes backed with white acrylic diffuser.

Straight blade louver (SBL) sides of perforated metal with staggered round holes and solid blade louvered center. Sides and louver backed with white acrylic diffuser.

Metal diffuser aligned mini slots (MDM) 46% open perforated metal backed with white acrylic diffuser.

Acrylic diffuser prismatic lens (ADP) extruded acrylic lens backed with white acrylic diffuser.

Metal diffuser with center slots (MDC) 52% open metal, .075" diameter holes with 1" wide solid center. Slotted with 1/2" x 2" open slots. Diffuser is backed with white acrylic overlay.

ELECTRICAL — All ballasts supplied are class P, thermally protected, resetting, HPF, non-PCB, UL Listed, CSA certified. Ballasts are sound rated A. Standard combinations conform to UL 935. Luminaire is suitable for damp locations.

INSTALLATION — Trims available for standard 1" and 9/16" tee bar or screw slot grids.

Fixtures can be row mounted end-to-end.

Drywall ceiling adaptors available.

LISTINGS — UL Listed to US and Canadian safety standards. Chicago plenum approved and NYC approved (see Options).

Avante is covered by one or more of the following patents: 5,988,829; 399,586; 411,641; 413,402; 2,212,513; 87,513.


WARRANTY — 1-year limited warranty. Complete warranty terms located at www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx

Actual performance may differ as a result of end-user environment and application.

Note: Specifications subject to change without notice.

Avante
Direct/Indirect Lighting

2AV 2'x2'

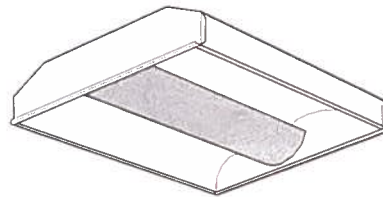

LINEAR FLUORESCENT

T8

1, 2 or 3 lamps

Specifications


Length: 24 (61.0)

Width: 24 (61.0)

Diffuser width: 8 (20.3)

Depth: 5-1/2 (14.0)

5-7/8 (14.9) for air fixture



All dimensions are in inches (centimeters) unless otherwise indicated.

ORDERING INFORMATION

For shortest lead times, configure product using **bolded options**.

Example: 2AV G 2 17 MDR MVOLT GEB10IS

2AV	G		3	17	MDR	MVOLT	GEB10PS GLR LP835
Series	Trim type	Air function	Number of lamps	Lamp type	Diffuser	Voltage	Options
2AV 2' wide	G Grid trim ST Screw slot	(blank) Static (no air function) A Air return/supply	1 2 3 Not included	17 17W T8 (24")	MDR Metal diffuser, round holes SBL Straight blade louver, round holes MDM Metal diffuser, mini slots ADP Acrylic diffuser, linear prismatic lens MDC Metal diffuser, round holes with large center slots Others available.	MVOLT ¹ 347 Others available.	GEB10IS Electronic ballast, ≤ 10% THD, instant start GEB10PS Electronic ballast, ≤ 10% THD, programmed rapid start ADZT Advance "Mark VII" low voltage dimming ALG Acrylic litter guard ¹ EL14 Emergency battery pack (nominal 1400 lumens, see Life Safety section) GLR Internal fast-blow fuse ¹ LP_835 Lamped. Specify lamp type and color PWS1836 6' prewire, 3/8" dia., 18-gauge, 3 wires NY3 New York City approved CP Chicago plenum approved APB Air pattern control blades (air only) ¹ Reflector option ASR Aluminum stepped reflector

DGA22

Accessories: Order as separate catalog number.

DGA22 Drywall ceiling adapter, unit installation. Use G trim plus DGA accessory for fixture trim flange and fixture support in plaster or plasterboard ceilings.

Notes


- 1 Refer to options and accessories section for more detailed information.
- 2 MVOLT (120 - 277 volt).
- 3 Must specify voltage, 120 or 277.

FLUORESCENT

Date Submitted: Sept. 2, 2015


2AV-2X2 T8

Distributor: C.E.D. Columbus, Oh 43207


	Project 14-16183-14 Date 10/29/2014 Contractor: Vaughn Industries Submitted By LIGHTING UNLIMITED INC	Catalog Number 2AV G 3 17 MDR Job Name: OSU NRB T Building GEB10PS LP835	Type <div style="font-size: 2em; font-weight: bold; text-align: center;">B15</div>
Notes			

2AV 2x2 Direct/Indirect Lighting

2AV G 3 17 MDR, (3) 17W T8 lamps, 1400 lumens per lamp, s/m 1.2 (along) 1.3 (across), test no. LTL9106

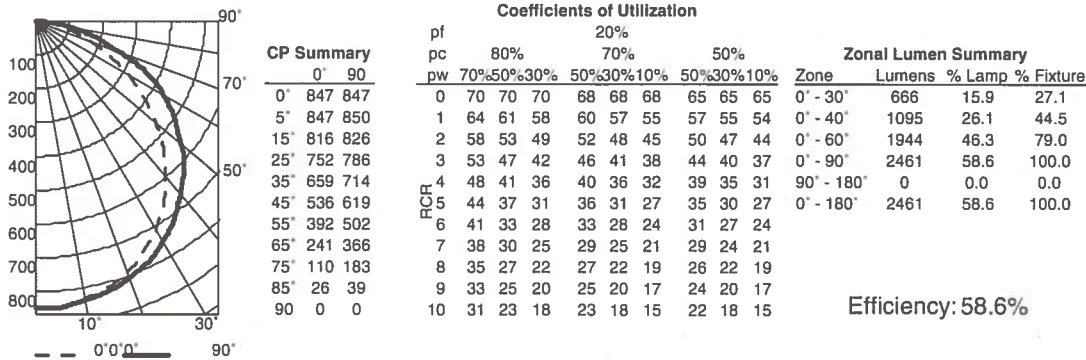


2AV G 3 17 SBL, (3) 17W T8 lamps, 1325 lumens per lamp, s/m 1.2 (along) 1.3 (across), test no. LTL10191

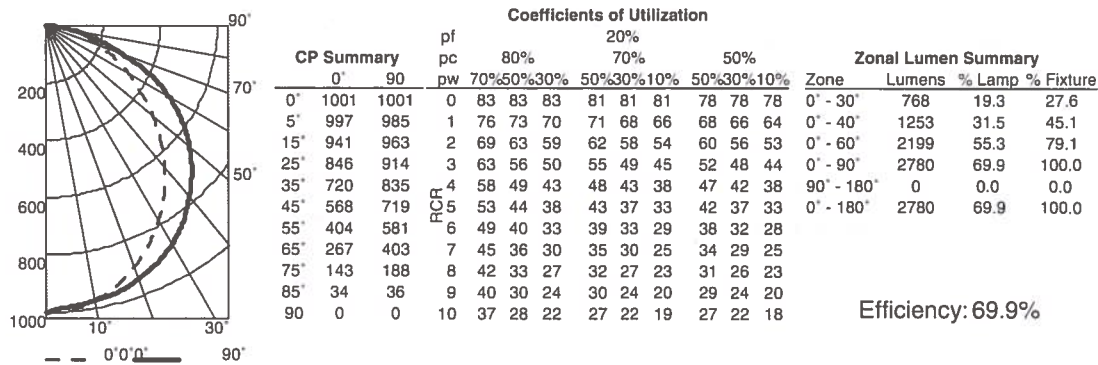

MOUNTING DATA

Ceiling Type	Appropriate Trim Type
Exposed grid tee (1" and 9/16")	G
Concealed grid tee	G
Screw slot	ST
Plaster or plaster board	G*

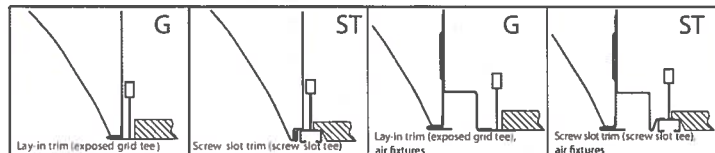

*DGA accessory available to provide ceiling trim flange and fixture support for plaster or plasterboard ceiling. Recommended rough-in dimensions for DGA installation is 24-3/4" x 24-3/4" (Tolerance is +1/8", -0")



2AV-2X2 T8

Contractor: Vaughn Industries

Job Name: OSU NRD Building B

Submitted by Lighting Systems of Columbus



Job Name:
OHIO STATE UNIVERSITY NORTH RESIDENTIAL
DISTRICT TRANSFORMATION

Catalog Number:
MLR5-1-4-OF-YK-PBW-120(PROGRAM RAPID
START)-T8

Notes:

Type:

B16

LSC14-37947


Catalog Number

Type

Project Name

Microlinea™ Recessed Series 5 - Fluorescent (5 1/8" Luminous Aperture)

Drywall Overlap
Flange Shown

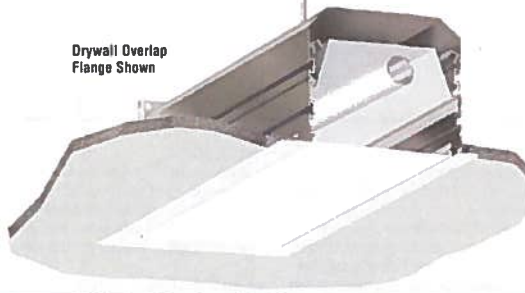

S P E C I F I C A T I O N S

Housing

Three piece extruded aluminum available in single sections up to 8' long in 2' increments. Standard flange finish is satin white.

Optical Controls

- (PB) 3/4" deep semi-specular aluminum parabolic baffle with blades on 1 1/2" centers
- (PBW) 3/4" deep white aluminum parabolic baffle with blades on 1 1/2" centers
- (LP) Flush clear extruded DR acrylic linear prismatic lens
- (TWA) Flush translucent white extruded DR acrylic lens
- (FC) Flush frosted clear extruded DR acrylic lens

Staggered Lamping

Staggered lamping is standard for all continuous rows. See Microlinea Row Guide Section.

Reflectors

Die-formed from .020" thick aluminum and finished with a high reflectance white enamel.

Ballast

Standard ballasts for T8 lamps are UL/CUL listed, Class P, HPF, electronic, universal 120/277 volt, instant start with <10% THD.

Circuitry

All fixtures are factory pre-wired for a single circuit. Provision for multiple switching/circuiting is optional.

Wiring

All fixtures intended for continuous rows are provided with factory installed quick-connect wiring.

Integral Controls

Contact factory for daylight and/or occupancy sensor controls.

Certification

All fixtures are UL/CUL listed for use in 'Dry Applications'. 'Damp Location' is optional.

Mountings

- YK = Snap-in Yoke - (OF)
- AL = Adjustable Aircraft Cable - (OF)
- TR = 1/4"-20 Threaded Rod (By others) - (SF)
- YK = Adjustable Yoke - (SF)



MLR5-1-4-OF-YK-XX-120(Programmed Rapid Start)-T8-

Series
MLR5

Nominal Length:
See Microlinea Row
Guide Section for
row lengths.

4'

of Lamps
1
2

Ceiling Type
OF
Drywall Overlap Flange
SF1
Spackle Flange w/1/2"
Drywall
SF5
Spackle Flange w/5/8"
Drywall

Optical Controls
PB
Semi-Specular
Parabolic Baffle
PBW
White Parabolic Baffle
LP
Linear Prismatic Lens
TWA
Translucent White
Acrylic Lens
FC
Frosted Clear Lens


Voltage
120
277
347

Lamp Type
T8


Options
NLCKT
Night Light Circuit
(N/A for 2' or 3')
EMCKT
Emergency Circuit
(N/A for 2' or 3')
EBPL
Emergency Battery Pack
(635-700 Lumens)
(N/A for 2' or 3')

Staggered Lamping - 2 Lp
EBPH
Emergency Battery Pack
(975-1325 Lumens)
(N/A for 2' or 3')
Dim
Dimming
FS
Fused Ballasts
GTD
Generator Transfer
Device
(N/A for 2' or 3')
CP
Chicago Pterium


1/2" or 5/8" Thick Drywall Ceilings (1 or 2 - T8 Lamps)



5 1/8"
5 1/8"
MLR5-2-OF
Drywall Overlap Flange
Shown with Flush Lens

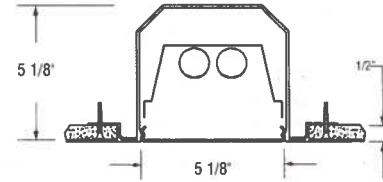


5 1/8"
5 1/8"
MLR5-2-SF1
Drywall Spackle Flange
Shown with Flush Lens

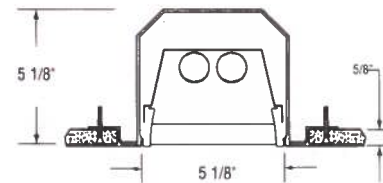

5 1/8"
5 1/8"
MLR5-2-SF5
Drywall Spackle Flange
Shown with Parabolic Baffle



Staggered Lamping - 1 Lp



Staggered Lamping - 2 Lp



Precision Architectural Lighting 4830 Timber Creek Drive Houston, Texas 77017
Tel 713.946.4343 Fax 713.946.4441 www.pal-lighting.com



Made in America

Date Submitted: Sept. 2, 2015

Distributor: C.E.D. Columbus, Oh 43207

Contractor: Vaughn Industries

Job Name: OSU NBDT Building B

Submitted by Lighting Systems of Columbus

**Job Name:**OHIO STATE UNIVERSITY NORTH RESIDENTIAL
DISTRICT TRANSFORMATION**Catalog Number:**STE24-332G-MPO-3EPUQHEPSN-
FO835SYL


Notes: 3-F32T8/835 LAMPS INCLUDED

Type:**B17**

LSC14-37947

Columbia
LIGHTING**STE24-3**

2' x 4' Stratus® Recessed Indirect / 3-Lamp T5, T5HO, T8

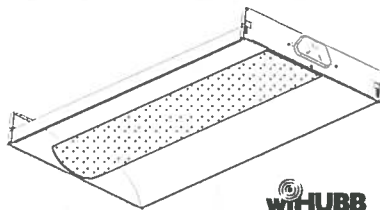**wiHUBB****FEATURES**

- Precision optical design produces high efficiency in a high visual comfort architecturally styled direct/indirect distribution
- Custom perforated metal basket is backed by a high transmission lamp obscuring overlay
- Optimized coating process and unique paint formulation provide exceptional reflectivity in a matte finish for a soft visual image and balanced basket and reflector illumination
- Completely recessed, provides a clean ceiling with uniform illumination at mounting heights as low as 8 feet
- Available for use with T8, T5 or T5HO linear fluorescent lamps
- Optional acrylic dust guard pivots to seal lamp compartment against contaminants especially for schools, medical facilities and public spaces
- Companion Louvered (STEL), side basket (STS) and pendant (STP) models available
- Available with exclusive wiHUBB technology preinstalled
 - Peer to peer, self-healing wireless mesh network
 - Integrated control system for 0-10VDC or step dimming, or On/Off

PROJECT INFORMATION

Project Name

Type

Catalog No.

Date

CONSTRUCTION

Luminaire housing and end caps are die formed code gauge cold rolled steel. The sturdy reflector is stiffened with linear forms, profiled to a precision curve. Perforated basket with high transmission overlay for improved optical efficiency plus lamp obscuration. Basket and all reflective surfaces are finished after fabrication with unique formula high reflectivity matte white paint for soft, uniform indirect illumination.

Thermoplastic light traps snap into the housing at both ends of the basket to prevent light leaks. Basket hinges down for easy access to center wireway.

INSTALLATION

An access plate is furnished with each luminaire for fast wiring access from the plenum. No need to open fixture.

BALLASTS

Energy efficient, thermally protected, automatic resetting, Class P, high power factor, sound rated A, magnetic or electronic ballasts. CEE NEMA Premium compliant.

ELECTRICAL

Standard class "P", thermally protected, autoresetting HPF ballast, sound rated A. CEE NEMA Premium compliant. All ballast leads extend a minimum of 6" through access location. NEC/CEC-compliant ballast disconnect is standard.

CEILING COMPATIBILITY

NEC-compliant T-Bar clips supplied with all grid trim fixtures. See ceiling details on reverse. For type SG ceilings order G trim. Fixture will be regressed 3/8" from the face of the ceiling tee. For hard ceilings order G trim and FK flange accessory. Assemble then support FK accessory at the ceiling plane using tie wires (by others). Contact your Columbia representative for compatibility information for specific ceiling types or for continuous row applications in hard ceilings.

CERTIFICATION

All luminaires are built to UL 1598 standards and bear appropriate UL and cUL or CSA labels. Damp location labeling is standard. Emergency-equipped fixtures labeled UL 924.

ORDERING INFORMATION**EXAMPLE STE24-332G-MPO-EU**

STE	24	-	3	-	MPO	-	-	-	-
MODEL	NO. OF LAMPS	CEILING TYPE	SHIELDING	VOLTAGE	OPTIONS	SIZE	LAMP TYPE	BALLAST	
STE Stratus® E-Series Recessed Indirect	3 Three	G Grid Lay-in SM Surface Mount	MPO Metal Perf w/Overlay	U 120V-277V 347 347V	GLR Fast Blow Fuse GMF Slow Blow Fuse EL Emergency Battery Pack ELS Emergency Battery Pack, TS DG Dust Guard Clear Acrylic NYC NYC Compliant NYCU NYC Compliant, Union Label WIH wiHUBB Enabled ¹	24 2' x 4'	28 4', T5, 28 Watt 32 4', T8, 32, 30, 28 or 25 Watt 54 4', T5HO, 34 or 31 Watt	E Electronic T8, Instant Start ED Electronic Dimming T8 and T5 (specify series) EP Electronic T5, T5HO, or T8, Programmed Start 3E 3-Lamp Electronic T8, Instant Start 3EP 3-Lamp Electronic T5, T5HO, Instant or T8 Programmed Start	

3EPUQHEPSN - One 3 Lamp Sylvania Programmed Start Ballast**FO835SYL - Sylvania Lamps Installed****ACCESSORIES
(ORDER SEPARATELY)****FK24** 2' x 4' Single Flange Kit
(Shipped separately)¹ Not available with Surface Mount Ceiling Types

Contractor: Vaughn Industries

Job Name: OSU NRPDT Building B

Submitted by Lighting Systems of Columbus



Job Name:
OHIO STATE UNIVERSITY NORTH RESIDENTIAL
DISTRICT TRANSFORMATION

Catalog Number:
STE24-332G-MPO-3EPUQHEPSN-
FO835SYL
Notes: 3-F32T8/835 LAMPS INCLUDED

Type:
B17

LSC14-37947

Columbia
LIGHTING

STE24-3

2' x 4' Stratus® Recessed Indirect / 3-Lamp T5, T5HO, T8

PHOTOMETRIC DATA

Test ITL65805 Test Date 8/30/10

LUMINAIRE DATA

Luminaire	STE24-332G-MPO-3EU
Ballast	Stratus, Recessed/Architectural
Ballast Factor	2 x 4 3-lamp with perforated metal
Lamp	ICN-3P32-5C
Lumens per Lamp	2750
Watts	71
Shielding Angle	0° = 0.90° = 0
Spacing Criterion	0° = 1.22 90° = 1.30
Luminous Opening in Feet	Length: 3.93
	Width: 1.88
	Height: 0.00

ZONAL LUMEN SUMMARY

Zone	Lumens	% Lamp	% Fixt.
0-30	1750	21.2	25.9
0-40	2875	34.8	44.2
0-60	5130	62.2	78.8
0-90	6507	78.9	100.0
0-180	6507	78.9	100.0

ENERGY DATA

Total Luminaire Efficiency	78.9%
Luminaire Efficacy Rating (LER)	81
IESNA RP-1-1993 Compliance	Noncompliant
Comparative Yearly Lighting Energy Cost per 1000 Lumens	\$2.96 based on 3000 hrs. and \$0.08 per kWh


COEFFICIENTS OF UTILIZATION (%)

RCR	RC	80				70				50				0
	RW	70	50	30	10	70	50	30	10	50	30	10	0	
	1	86	82	79	76	84	80	77	74	77	74	72	66	
	2	78	71	66	61	76	70	65	61	67	63	59	55	
	3	71	63	56	51	69	61	55	50	59	54	50	46	
	4	65	55	48	43	63	54	48	43	52	47	42	39	
	5	60	49	42	37	58	48	42	37	47	41	36	34	
	6	55	44	37	32	53	44	37	32	42	36	32	30	
	7	51	40	33	28	50	40	33	28	38	32	28	26	
	8	47	37	30	25	46	36	30	25	35	29	25	23	
9	44	34	27	23	43	33	27	23	32	27	23	21		
10	42	31	25	21	41	31	25	21	30	24	20	19		

RCR = Room Cavity Ratio

RC = Effective Ceiling Cavity Reflectance RW = Wall Reflectance


INDOOR CANDELA PLOT

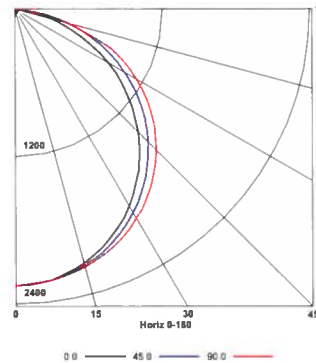

AVG. LUMINANCE (Candela/Sq. M.)

	0.0	22.5	45.0	67.5	90.0
0	3275	3275	3275	3275	3275
30	3110	3142	3220	3285	3307
40	2986	3058	3174	3307	3330
45	2917	3000	3158	3309	3350
50	2824	2926	3125	3300	3359
55	2700	2832	3078	3289	3358
60	2538	2719	3010	3255	3339
65	2330	2603	2923	3254	3289
70	2011	2415	2794	3088	3016
75	1790	2184	2550	2561	2561
80	1460	1913	1905	2156	2114
85	919	1170	1438	1504	1504


DIMENSIONAL DATA

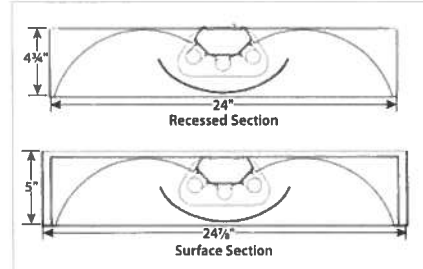

Top View

Surface Mount K.O. Dimensions

- A: 1/2" K.O.
- B: 2" x 3" Access (Cover Removed)
- C: 2" x 3" Rectangular Knockout

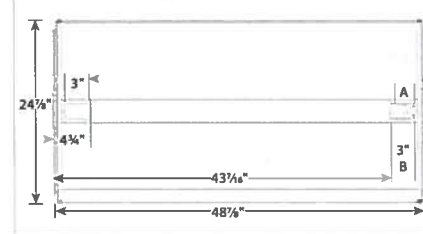

NOTE: All dimensions are in inches; dimensions and specifications are subject to change without notice. Please consult factory or check sample for verification.

Page 2/2 Rev 03/20/13


RECESSED ARCHITECTURAL / STE24-3

© 2013 Columbia Lighting, a division of Hubbell Lighting, Inc. Because of continuing product improvement programs, Columbia Lighting reserves the right to change specifications without notice. 701 Millennium Blvd. Greenville, SC 29607 / Tel 864.678.1000 / Website www.columbialighting.com



CEILING COMPATIBILITY

Type G Side



For lay-in installation in exposed grid ceilings. Maximum tee widths of 1" and maximum heights of 1 1/2" allowed.

Type SG Ceiling




For 1/2" slot grid type ceilings. Luminaire will be recessed 1/2" horizontal surface of the tee.

FK Flange Kit






For hard ceiling applications, fixtures must be ordered with a flange kit that wires directly into the concealed ceiling opening for a clean finished appearance. For row configurations contact your local Columbia Representative.

Flange kit cut out dimension for single FK22 only: 24 3/4" x 48 3/4"

	Project 14-16183-14 Date 10/29/2014 Contractor: Vaughn Industries Submitted By LIGHTING UNLIMITED INC	Catalog Number P43-PSTD-FLSH-1T8-04'-BLW-TMW-D1G-SC-WTW-120-X1 Job Name: P43-PSTD-FLSH-1T8-04'-BLW-TMW-D1G-SC-WTW-120-X1 Notes	Type <div style="font-size: 2em; font-weight: bold; text-align: center;">B24</div>
--	--	---	---

P43 Perimeter Cove & Perimeter

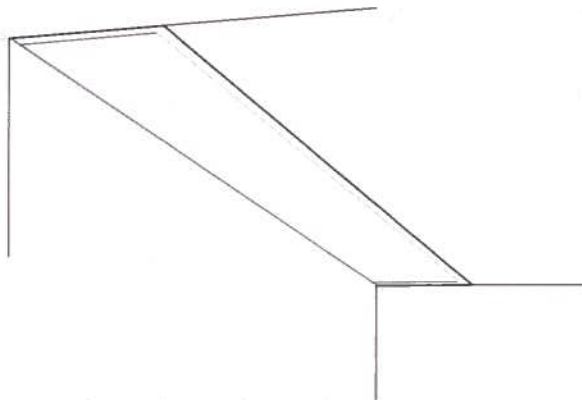

series/ style	lens position	Lamp Rows	nominal length	shielding	trim color	distribution	circuit- ing	mount- ing	voltage	ceiling system	options
P43-PSTD	FLSH	1T8	04'	BLW	TMW	D1G	SC	WTW	120	X1	
PSTD standard	FLSH flush lens	1T8	02'	AWW acrylic wall wash lens (use D1G or D1R dist)	TMW textured matte white	D1 direct	SC single circuit	WTW wall to wall	120	X1 exposed T-Bar	EML emergency battery (600-700 lumens)
PSTG staggered (N/A D1R) (1 lamp only)	REG3 3" regress lens	2T8 (N/A PSTG)	03'	AWG acrylic wall graze lens (use D1S, STG only)	YGW gloss white	D1G asymmetric 5" wall grazer	DC dual circuit (2 lamp)	LP light pocket	277	X3B hard ceiling (overlapping flange)	EMH emergency battery (1100-1400 lumens)
		1T5/HO	06'		Y premium Color	D1S asymmetric with grazer (STG only)			347	X6 slot grid	DM dimming, specify manufacturer, voltage, and other requirements
		2T5/HO (N/A PSTG)	08'	SAL satin acrylic lens	CC custom color	D1R asymmetric to room (15") (N/A REG3) (N/A STG)			UNV 120-277	X7 hard ceiling (concealed flange)	RSE rapid-start electronic
			R *row length	OPL opal frost acrylic lens	*standard	*1 lamp only, must use AWW lens					10THD ballast w/ < 10% total harmonic distortion
				PRA prismatic acrylic lens							B specify ballast, manu- facturer & catalog #
				SPL silver parabolic louver							FH fixture fusing (slow blow)
				BLA bladed louver- anodized							C2 90° 2-way corner w/ acrylic lens, lit corners on STG & D1G/D1R only
				BLW bladed louver - white							QC quick-connect circuit assemblies *consult factory

Features A narrow 4" wide recessed perimeter lighting system in either a standard or a staggered lamp configuration for single T8 or T5/HO lamp rows to provide continuous lighting without socket shadows along the entire row length. Standard lamping for 2T5 or T5HO lamp rows have off-set lamps within modular rows to mitigate socket shadows. T8 lamps in standard configuration are end to end in modular rows and are not offset.


Construction The housing, available in 2-, 3-, 4-, 6- or 8-foot standard lengths, is made of die-formed 20-gauge steel. Louver material is semispecular, low iridescent aluminum. Snap-in prismatic lens is clear extruded acrylic. Snap-in satin acrylic lens is clear frost extruded acrylic with a matte finish for soft, even light transmission. AWW lens is designed with micro prisms for optical performance and MUST be used for D1G wall graze.

NOTE: All D1G/D1R & PSTG include gear trays.

Finish The standard housing and trim color is textured matte white (TMW) using polyester powder paint.

Electrical T8 fixtures have instant-start electronic ballasts with less than 20% THD. T5 and T5HO fixtures have programmed start electronic ballast with less than 10% THD. Fixtures are U.L. Damp labeled (non-emergency) and I.B.E.V. manufactured. Maximum ballast size available on non-staggered models: 2 3/8" width x 1 1/4" height. Maximum ballast size available on staggered models: 1 3/4" width x 1 1/4" height.

Mounting Fixture is to be recessed-mounted into exposed T-bar or hard ceiling applications.

	<p>Project 14-16183-14 Date 10/29/2014 Submitted By LIGHTING UNLIMITED INC</p>	<p>Catalog Number Job Name Notes</p>	<p>Type B24</p>
---	--	--	---------------------------------


Cove & Perimeter **P43 Perimeter**

photometric data

P43-PSTD-REG3-1T5HO-AWW-D1G

Report #LL1080714 R01 D=100% I=0.0%
Spacing Criteria: Along 1.00, Across 1.00

Delivered Lumens: 2011
Input Watts: 32.55
Efficiency: 77.30%



Zonal Lumen Summary

Zone%	% Lamp	% Luminaire
0-90	76.00	98.20
90-180	1.40	1.80

Candlepower Summary

Vertical Angle	0°	22.5°	45°	67.5°	90°
0	1159	1159	1159	1159	1159
5	1189	1184	1181	1173	1150
10	1136	1139	1155	1159	1127
15	1038	1050	1089	1122	1090
20	928	942	995	1060	1037
25	826	839	890	978	970
30	729	740	784	879	888
35	635	646	682	770	793
40	546	557	587	659	687
45	466	474	499	552	576
50	395	401	418	454	466
55	341	345	354	377	376
60	287	289	290	300	288
65	240	240	234	230	201
70	197	195	186	170	147
75	154	152	141	120	95
80	113	110	99	79	54
85	73	69	59	46	24
90	35	33	28	15	9

Coefficients of Utilization (%)


Floor Ceiling Wall	effective floor cavity reflectance = 20											
	80				70				50			
	70	50	30	10	70	50	30	10	50	30	10	10
0	92	92	92	92	89	89	89	85	85	85	85	85
1	85	81	78	76	82	79	77	74	76	74	72	76
2	78	72	67	63	76	71	66	62	68	64	61	66
3	72	64	59	54	70	63	58	53	61	56	52	61
4	66	58	52	47	64	57	51	47	55	50	46	55
5	61	52	46	41	60	51	45	41	50	44	40	50
6	57	48	41	37	56	47	41	37	45	40	36	45
7	53	44	37	33	52	43	37	33	42	36	33	42
8	50	40	34	30	49	40	34	30	39	33	30	39
9	47	37	31	27	46	37	31	27	36	31	27	36
10	44	35	29	25	43	34	29	25	33	28	25	33

photometric data

P43-PSTG-REG3-1T5-04'-AWG-D1S

Report #L081404101 D=97.30% I=2.70%
Spacing Criteria: Along 1.2, Across 1.00

Delivered Lumens: 1745
Input Watts: 34.42
Efficiency: 51%



Zonal Lumen Summary

Zone%	Lumens	% Luminaire
0-90	1697.28	97.30
90-180	47.89	2.70

Candlepower Summary


Vertical Angle	0°	25°	45°	65°	90°
0	1131	1131	1131	1131	1131
5	1144	1144	1146	1148	1120
10	1042	1066	1107	1132	1102
15	887	930	1008	1091	1080
20	726	770	870	1010	1035
25	640	656	731	908	984
30	590	593	627	794	912
35	535	543	555	669	821
40	481	486	492	562	705
45	424	428	431	472	578
50	376	376	375	398	452
55	333	331	322	328	341
60	302	295	282	273	257
65	271	260	239	216	178
70	238	229	202	171	116
75	210	197	168	131	71
80	178	166	136	96	37
85	142	132	105	67	13
90	98	90	71	42	0

Coefficients of Utilization (%)


Floor Ceiling Wall	effective floor cavity reflectance = 20											
	80			70			50			30		
	70	50	30	70	50	30	70	50	30	70	50	30
0	1181	1181	1181	1151	1151	1151	1151	1151	1101	1011	1011	1011
1	1091	1041	100	97	106	102	98	95	97	94	91	97
2	100	93	86	81	97	90	85	80	86	82	78	86
3	92	83	75	69	90	81	74	69	78	72	67	78
4	85	75	67	60	83	73	66	60	70	64	59	70
5	79	68	59	53	77	66	59	53	64	57	52	64
6	74	62	54	48	72	61	53	47	59	52	47	59
7	69	57	49	43	67	56	48	42	54	47	42	54
8	65	52	45	39	63	52	44	39	50	43	39	50
9	61	49	41	36	60	48	41	35	47	40	35	47
10	58	45	38	33	56	45	38	33	44	37	33	44

installation

Adjoining Detail

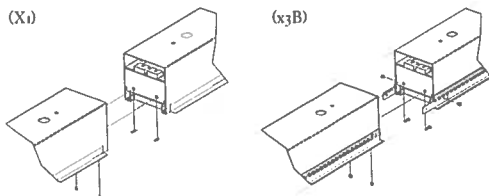



Ceiling Systems



Framing Dimensions X3B & X7
Add 1/2" in fixture width. Add 5/8" in fixture length.


Mounting Locations

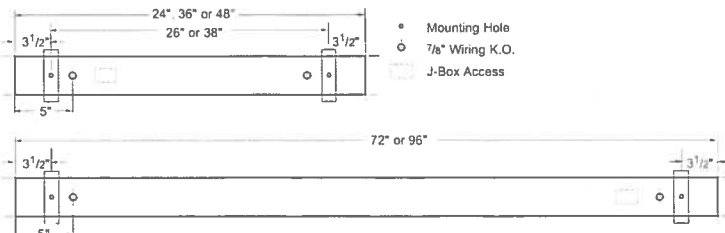

	Project 14-16183-14 Date 10/29/2014 Contractor Vaughn Industries OSU NRD BUILDING	Job Name OSU NRD Building B OSU STD FLOW 215-04-BLW-TMW-D1G-SC-WTW-120-X1	Catalog Number Type
	Submitted By LIGHTING UNLIMITED INC	Notes	B24

P43 Perimeter Cove & Perimeter

Frosted

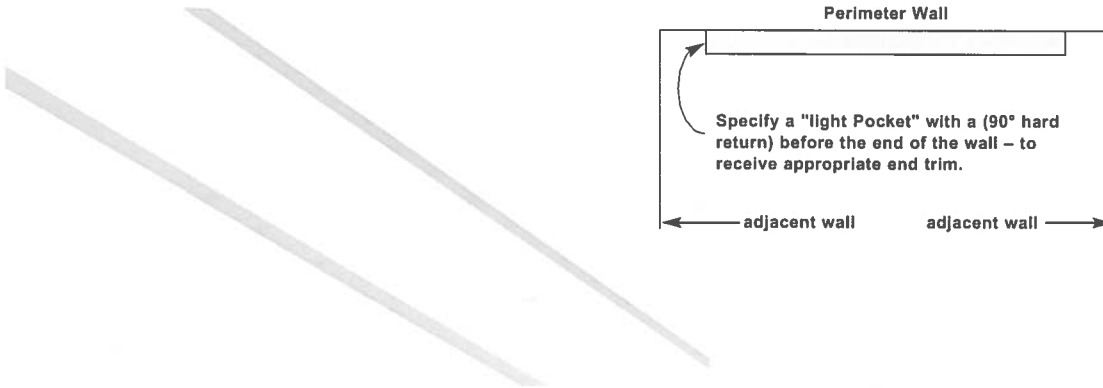

1 lamp Staggered System (STG)

Typical Row Examples - Lamp quantities and wattages are dependant on row size.


T5/T5HO - (3) 3' 21w or 39w lamps - Gear Trays: (1) 3' and 1 (6') Telescoping



T5/T5HO - (2) 3' 21w or 39w lamps and (2) 4' 28w or 54w lamps - Gear Trays: (1) 6' and 1 (8') Telescoping



T5/T5HO - (1) 3' 21w or 39w lamps and (5) 4' 28w or 54w lamps - Gear Trays: (1) 3', (1) 4', (1) 8' & (1) 8' Telescoping



T8 - (3) 3' 25w lamp - Gear Tray: (1) 8' individual



T8 - (3) 3' 25w and (1) 32w lamps - Gear Trays (1) 3', (1) 4' and (1) 6', Telescoping



T8 - (2) 3' 25w lamps and (4) 32w lamps - Gear Trays (2) 8' and (1) 6' Telescoping



Gear Trays are field installed
4 1/4" lamp overlap, from certain
viewing angles brightness
variations may be visible
at overlap.

Standard System

Typical Row Examples

2T8 lamp rows



2T5 or 2T5HO lamp rows



2T5 or 2T5HO lamp rows



Factory supplied submittal drawing will be provided. Lamps are not supplied.

Prudential reserves the right to change design specifications or materials without notice.

Contractor: Vaughn Industries

Job Name: OSU NRD Building B

Submitted by Lighting Systems of Columbus



Lighting Systems
of Columbus, Inc.

Job Name:

OHIO STATE UNIVERSITY NORTH RESIDENTIAL
DISTRICT TRANSFORMATION

Catalog Number:

TMC-320-FL-1-T5 28W-SQHFR
SURFACE MOUNT -4' BL-120

Notes:

Type:

B25

LSC14-37947



Project

Notes

Configure product using standard options.
For other custom options contact Voigt.
Example: SQOP, 1-T5-17,DWA, 4',WH,120,PHC



Surface Mount Shown



Surface Mount Shown



Aircraft Cable Mount Shown



Stem Mount Shown

COMMERCIAL

Timo Mini

- Lo-Profile Linear Fluorescent
- T5/T8 Lamping
- Shure Seal Powder Coat Finish - For long lasting finish
- Optional Integral battery back up
- Wet Location Rated
- Optional Vandal Proof

Applications:

• Offices • Corridors • Stairwells • Retail • Garage

Shure Seal Finish

fixture Series	lamp	lens	suspension	length	finish	voltage	options
TMC-320-FL-1T5-28W-4'-SQHFR (Surface Mount) - 4' 1 BL -120							PHC
TMC-320-FL	1-T8-17w 1-T8-25w 1-T828w 1-T832w 1-T5-28w 1-54T5HO	SQHFR-High performance frost lens	surface mount FWH-wall mount with arm-std extension 1" SRM-Semi Recess Mount SC- Swivel Canopy W/Stem (Specify Length) RC- Rigid Canopy W/Stem (Specify Length) AC- Air-Orb Cable (Specify Length) For other contact Voigt	4' Specify length of fixture: 4' 8' Other	WH-White BL-Black DB-Dark Bronze SIL-silver Custom available check with factory	120 277	PHC-Photo Sensor OCC-Occupancy Sensor F-Fuse VP-Vandal Proof

Note: Fixture is single lamp cross section

Contractor: Vaughn Industries

Job Name: OSU NROD Building B

Submitted by Lighting Systems of Columbus

Lighting Systems
of Columbus, Inc.**Job Name:**OHIO STATE UNIVERSITY NORTH RESIDENTIAL
DISTRICT TRANSFORMATION**Catalog Number:**TMC-320-FL-1-T5 28W-SQHFR
SURFACE MOUNT -4' BL-120

Notes:

Type:**B25**

LSC14-37947

TIMO MINI

Timo Mini

- Lo-Profile Linear Fluorescent
- T5/T8 Lamping Exclusive
- Shure Seal Powder Coat Finish - For long lasting finish
- Optional Integral battery back up
- Wet Location Rated

Applications:

- Offices • Corridors • Stairwells • Retail • Garage
- Shure Seal Finish***



Surface Mount Shown




Surface Mount Shown



Aircraft Cable Mount Shown



Stem Mount Shown

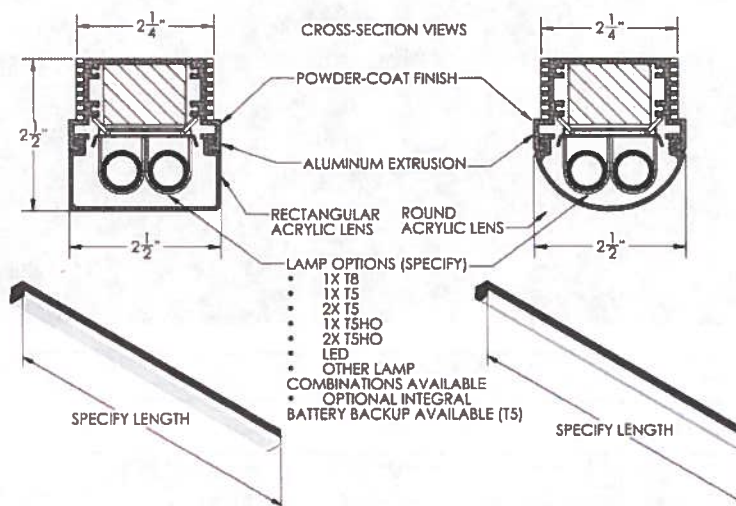

Contractor: Vaughn Industries

Job Name: OSU NRD Building B

Submitted by Lighting Systems of Columbus

Lighting Systems
of Columbus, Inc.**Job Name:**OHIO STATE UNIVERSITY NORTH RESIDENTIAL
DISTRICT TRANSFORMATION**Catalog Number:**

MLR3-1-4FT-FT-NO SHIELD-120-T8-

FS

Notes:

Type:**B40**

LSC14-37947


Catalog Number

Type

Project Name

Microlinea™ Recessed Series 3 - Fluorescent

(3 1/8" Luminous Aperture)

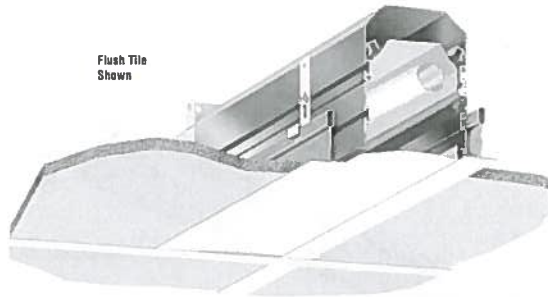Flush Tile
Shown

S P E C I F I C A T I O N S

Housing

Three piece extruded aluminum available in single sections up to 8' long in 2' increments. Standard flange finish is satin white.

Optical Controls

- (PB) 3/4" deep semi-specular aluminum parabolic baffle with blades on 1 1/2" centers
- (PBW) 3/4" deep white aluminum parabolic baffle with blades on 1 1/2" centers
- (LP) Flush clear extruded DR acrylic linear prismatic lens
- (TWA) Flush translucent white extruded DR acrylic lens
- (FC) Flush frosted clear extruded DR acrylic lens
- (RTWA) Regressed translucent white DR acrylic lens

Staggered Lamping

Staggered lamping is standard for all continuous rows. See Microlinea Row Guide Section.

Reflectors

Die-formed from .020" thick aluminum and finished with a high reflectance white enamel.

Ballast

Standard ballasts for T8 lamps are UL/CUL listed, Class P, HPF, electronic, universal 120/277volt, instant start with <10% THD.

Circuitry

All fixtures are factory pre-wired for a single circuit. Provision for multiple switching/circuiting is optional.

Wiring

All fixtures intended for continuous rows are provided with factory installed quick-connect wiring.

Integral Controls




Contact factory for daylight and/or occupancy sensor controls.

Certification

All fixtures are UL/CUL listed for use in 'Dry Applications'. 'Damp Location' is optional.

Grid Ceilings

(1 - T8 Lamp)



Staggered Lamping - 1 Lp

Series MLR3

Nominal Length:
See Microlinea Row Guide Section for row lengths

Ceiling Type:
FT = 15/16" or 9/16" Grid with Flush Tile
TT = 15/16" or 9/16" Grid with Regular Tile
SG = Screw Slot Grid

MLR3-1-4-FT-PB-120-T8-[]

of Lamps

Optical Controls

PB Semi-Specular Parabolic Baffle
PBW White Parabolic Baffle
LP Linear Prismatic Lens
TWA Translucent White Acrylic Lens
FC Frosted Clear Lens
RTWA Regressed Translucent White Acrylic Lens

Voltage

120
277
347

Lamp Type

T8

Options

NLCKT Night Light Circuit (Common Neutral) (N/A for 2' or 3')
EMCKT Emergency Circuit (Separate Hot & Neutral) (N/A for 2' or 3')
EBPL Emergency Battery Pack (635-700 Lumens) (N/A for 2' or 3')
EBPH Emergency Battery Pack (975-1325 Lumens) (N/A for 2' or 3')

Dim
Dimming

FS Fused Ballasts

GTD Generator Transfer Device (N/A for 2' or 3')
CP Chicago Plenum
DL Damp Location
RS Rapid Start Ballast




Precision

No Shield

Tel 713.946.4343 Fax 713.946.4441 www.pal-lighting.com

Date Submitted: Sept. 2, 2015

Distributor: C.E.D. Columbus, Oh 43207

	Project 14-16183-14 Date 10/29/2014 Contractor: Vaughn Industries Job Name: OSU NRD Building Submitted By LIGHTING UNLIMITED INC	Catalog Number DMW 2 32 MVOLT GEB10PS Notes	Type C2
--	--	---	-----------------------



FEATURES & SPECIFICATIONS

INTENDED USE — Intended for low to medium mounting heights where dust, dirt, humidity or moisture are present. Ideal for canopies, dock areas, wastewater treatment, refrigerated areas, food processing and other non-hazardous environments. Certain airborne contaminants can diminish integrity of acrylic. [Click here for Acrylic Environmental Compatibility table for suitable uses.](#)

CONSTRUCTION — Housing formed from impact resistant, UV stabilized, fiberglass reinforced polyester with cold-rolled steel enclosed wireway. Poured in place gasketing provides a seal between housing and diffuser. Captive, corrosion-resistant cam-action latches secure the diffuser, six on 4' units, and ten on 8' units. Stainless steel latches available.

Finish: Painted parts pretreated with a five-stage iron-phosphate process to ensure superior paint adhesion and corrosion resistance, then finished with a high-gloss, baked white enamel.

OPTICS — High-impact acrylic diffuser with a stippled interior surface to spread lamp image.

PLEASE NOTE: The standard 4' diffuser is 2-1/4" deep, and the standard 8' or 48T8HO diffuser is 3" deep. To order the 4' diffuser so that it matches the depth of the 8' diffuser, order the ARDP option. The 8' diffuser is not available in the 2-1/4" depth.

ELECTRICAL — Thermally protected, resetting, Class P, HPF, non-PCB, UL Listed and CSA Certified ballast is standard.

AWM, TFM, THHN wire throughout, rated for required temperatures.

INSTALLATION — For unit or row installations, surface (ceiling or wall) or suspended mounting. Wall mounting; horizontal orientation only for use in damp locations. Stainless steel surface spring-mounting brackets standard (2 included).

LISTINGS — 120V, 277V and MVOLT are UL Listed and CSA Certified (standard). 347V is CSA Certified (see Options). NOM Certified (see Options). Listed for 25°C ambient and wet locations for covered-ceiling applications. IP65 rated. Optional IP67 rating available (supplied with 8 latches on 4' units and 14 latches for 8' units; covered ceiling not required). Compliance to FDA/USDA requirements and/or NSF splash-zone certification.

WARRANTY — 1-year limited warranty. Complete warranty terms located at

www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx

Actual performance may differ as a result of end-user environment and application.


Note: Specifications subject to change without notice.

Enclosed and Gasketed Industrial

DMW

INSTANT, PROGRAMMED OR RAPID START

4' or 8' length
1, 2 or 3 lamps



Specifications

Length:	50 (127.0) 98 (248.9)
Width:	8-1/8 (20.6)
Fixture depth:	5-5/8 (14.3) (deep lens) 4-3/4 (12.1) (standard lens)

All dimensions are shown in inches (centimeters) unless otherwise noted.

ORDERING INFORMATION

Lead times will vary depending on options selected. Consult with your sales representative.

Example: DMW 2 32 MVOLT GEB10IS


DMW	2	32		MVOLT	GEB10PS	
Series	Number of lamps	Lamp type	Diffuser	Voltage	Ballast	Options
DMW	1	28T5 28W T5 (48") ¹	(blank) 2-1/4" Deep high-impact acrylic (50% DR)	120	GEB10IS	ELDW Emergency battery pack (nominal 300 lumens) ⁷
Wet location	2	32 32W T8 (48")	ARDP 3" Deep high-impact acrylic (50% DR) ⁵	277		ELSDW Emergency battery pack (nominal 500 lumens) ⁷
For tandem double length unit, add prefix T. Example: TDMW ¹	3 ²	48T8HO 44W T8HO (48")		347		EL6DW Emergency battery pack (nominal 600 lumens) ⁷
		54T5HO 54W T5HO (48") ⁴		MVOLT	GEB10RS	EL14DW Emergency battery pack (nominal 1400 lumens) ⁷
		96T8 59W T8 slimline (96")		others available		GLR Internal fast-blow fusing ⁸
		96T8HO 86W T8 380mA (96")				GMF Internal slow-blow fusing ⁸
					GEB10PS	RIF1 Radio interference filter, one per fixture
						STSL Stainless steel latches
						WLF Wet location fittings (one pair; installed, top, for use with 1/2" rigid conduit)
						IP67 IP67 rated; requires 8 latches for 4' fixtures and 14 latches for 8' fixtures
						CSA CSA certified (only required for 347V)
						NOM NOM certified
						CS89 6' white cord, 16/3, no plug, wet location
						CS88 6' Brad Harrison 16/3 cord and straight blade plug set wet location ⁴
						MSI Wet location occupancy sensor pre-wired ^{4,9}
						DL Damp location ¹⁰

Accessories: Order as separate catalog number.

BCD	Bracket for hanger chain mounting. Two per package ¹¹
HC36	Chain hangers (1 pair, 36" long); Requires BCD
WLF	Wet location fittings (1 pair, not installed, for use with 1/2" rigid conduit)
DMW/VRISM8	Surface mounting brackets (pair) ¹²

Notes

- 1 Not available with 96T8 or 96T8HO.
- 2 32W T8 and 28 T5 lamps only.
- 3 Must specify GEB10PS ballast.
- 4 Must specify GEB10PS90 ballast.
- 5 ARDP standard on 48T8HO and 8' fixtures.
- 6 Available 347V T8 only.
- 7 Must specify voltage, 120 or 277V only.
- 8 Must specify voltage. Not available with MVOLT.
- 9 For mounting up to 8' specify MSI8; for mounting up to 20' specify MSI20.
- 10 DL option required for batty packs, sensors, and cord sets that are not wet location listed.
- 11 For stainless steel, specify STS (ex: BCD STS).
- 12 Brackets ship standard with fixture. For replacement purposes only.

	Project 14-16183-14 Date 10/29/2014 Conductor: Vaughn Industries OSO NRD BUILDING Submitted By LIGHTING UNLIMITED INC	Catalog Number DMW 2-52 MW POLY CB 10PS Job Name OSO NRD Building Notes	Type <div style="font-size: 2em; font-weight: bold; text-align: center;">C2</div>
---	---	--	--

DMW Instant, Programmed or Rapid Start

MOUNTING DATA



For unit or row installation, surface (ceiling or wall) or suspended mounting.

DMW — Drill holes through housing and channel at appropriate locations. Includes gasketed wet location fittings on ends for power feeding/mounting. Fitting is threaded for 1/2" rigid conduit (optional WLF for top mounting). Attach to surface using fasteners and sealing washers (by others) appropriate for ceiling materials.

Unit Installation — Minimum of two hangers required.


Row Installation — Minimum of two hangers required. Recommended 1/2" nipple with union (by others) for DMW.

MOUNTING ACCESSORIES

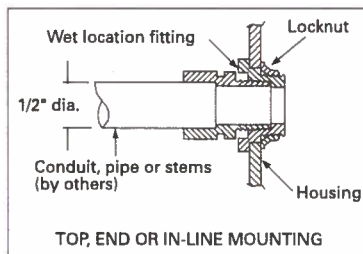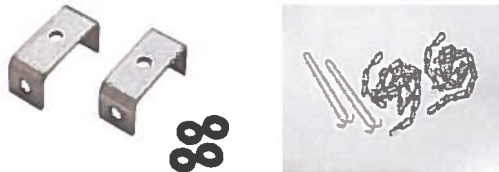

DIMENSIONS



Inches (centimeters). Subject to change without notice.

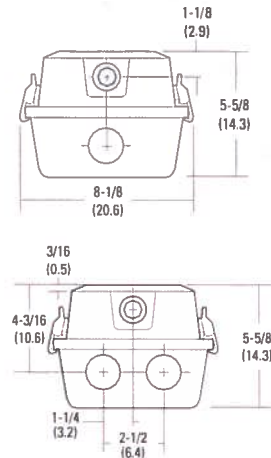

A = 11/16 (17) Dia.

B = 1-1/8 (29) Dia.

Recommended mounting locations
(field drilling required)

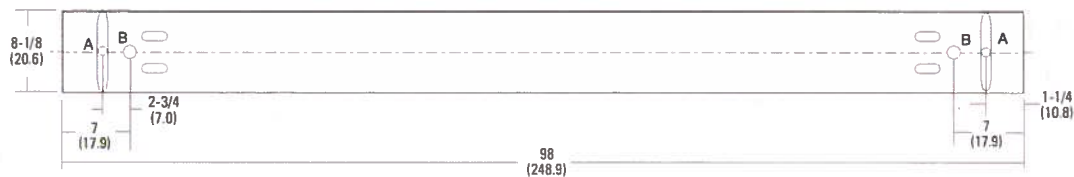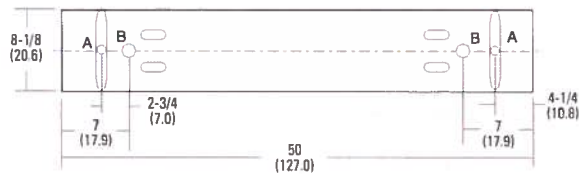

PHOTOMETRICS

See www.lithonia.com

Contractor: Vaughn Industries

Job Name: OSU NRODT Building B

Submitted by Lighting Systems of Columbus

Lighting Systems
of Columbus, Inc.**Job Name:**OHIO STATE UNIVERSITY NORTH RESIDENTIAL
DISTRICT TRANSFORMATION**Catalog Number:**

KL4-232-U-EPUQHEPSN-KHC


Notes:

Type:**C8**

LSC14-37947

Columbia
LIGHTING**KL BI-PIN**

Premium Industrial / 2, 3, or 4-Lamp T5, T5HO, T8

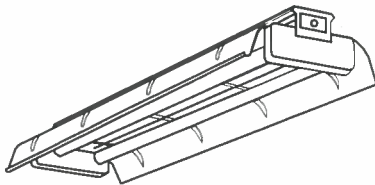**FEATURES**

- Available in 4' and 8' lengths
- Reflectors have 15% uplight
- Spring loaded turret lampholders
- 6" lamp spacing
- For individual or continuous row mounting
- Channel ends double as joiners
- Full depth end closures available
- T5/T5HO versions feature rotating locking sockets without turrets

PROJECT INFORMATION

Project Name

Type

Catalog No.

Date

CONSTRUCTION

Heavy steel housing with longitudinal reinforcing ribs for extra strength. Reflector die-embossed with transverse ribs for maximum rigidity. Solid top or 15% uplight versions with extruded openings available.

FINISH

White painted parts are treated with a five stage phosphate bonding process and finished with a high reflectance baked enamel.

ELECTRICAL

Standard class "P", thermally protected, auto-resetting HPF ballast, sound rated A. All ballast leads extend a minimum of 6" through access location. NEC/CEC-compliant ballast disconnect is standard.

CERTIFICATION

All luminaires are built to UL 1598 standards and bear appropriate UL and cUL or CSA labels. Damp location labeling is standard. Emergency-equipped fixtures labeled UL 924.

ORDERING INFORMATION

EXAMPLE KL4-232-U-EU-GLR-PAF

KL	SIZE	NO. OF LAMPS IN CROSS SECTION	LAMP TYPE	REFLECTOR TYPE	VOLTAGE	OPTIONS
KL Premium Industrial	4' 4"	2 Two	28 4' T5: 28 Watt	U Apertured Reflector for Uplight (Standard)	U 120V-277V	GLR Fast Blow Fuse
	8' 8"	3 Three	32 4' T8: 32, 30, 28 or 25 Watt	ST Solid top (No Uplight)	347 347V	GMF Slow Blow Fuse
		4 Four	54 4' T5HO: 54 or 51 Watt	SLR Specular Reflector with Uplight		EL Emergency Battery Pack
				SLRST Specular Reflector Solid Top		BC Branch Circuit Plug-on Wiring System (See options section for details.)
						PAF Paint After Fabrication
						NYC NYC Compliant
						NYCU NYC Compliant, Union Label
						ACCESSORIES (ORDER SEPARATELY)
						KZT Zip Tie Hanger - 1/2" spacer on T-bar ceiling
						KTH Slide Clamp Tong Hanger
						S18 18" Stem, canopy and 8" aligner
						SS18 18", 45" Swivel Stem & Canopy
						KHC 24" Chain Hanging Assembly
						KLEC Full Depth End Closure
						KLWG4 Wire Guard 4" lg. - 2 required per 8' fixture
						KLEGG White Straight Blade Egg Crate Louver 4" - 2 required per 8' fixture

EPUQHEPSN- Sylvania Programmed Start Ballast

Contractor: Vaughn Industries

Job Name: OSU NRD Building B

Submitted by Lighting Systems of Columbus



Job Name:
OHIO STATE UNIVERSITY NORTH RESIDENTIAL
DISTRICT TRANSFORMATION

Catalog Number:

KL4-232-U-EPUQHEPSN-GLR KHC
Notes:

Type:**C8**

LSC14-37947

Columbia
LIGHTING

KL BI-PIN

Premium Industrial / 2, 3, or 4-Lamp T5, T5HO, T8

PHOTOMETRIC DATA**LUMINAIRE DATA**

Luminaire: KL4-232-OCT-PAF
KL Industrial
1' x 4' 2-Lamp Industrial with
Apertured White Reflector
Ballast: R2P32
Ballast Factor: 0.95
Lamp: FO32/41K
Lumens per Lamp: 2900
Watts: 74
Shielding Angle: N/A
Spacing Criterion: 0° = 1.27 90° = 1.30
Luminous Opening
in Feet: Length: 4.00
Width: 1.02
Height: 0.00


ZONAL LUMEN SUMMARY

Zone	Lumens	% Lamp	% Fixt.
0-30	1090	18.8	20.9
0-40	1807	31.1	34.7
0-60	3314	57.1	63.6
0-90	4396	75.8	84.3
90-120	179	3.1	3.4
90-130	263	4.5	5.0
90-150	518	8.9	9.9
90-180	817	14.1	15.7
0-180	5212	89.9	100.0

Test 10183 Test Date 1/8/03

ENERGY DATA

Total Luminaire Efficiency: 89.9%
Luminaire Efficacy Rating (LER): 67
IESNA RP-1-1993 Compliance: Non-Compliant
Comparative Yearly Lighting
Energy Cost per 1000 Lumens: \$3.58 based on
3000 hrs. and
\$0.08 per KWH

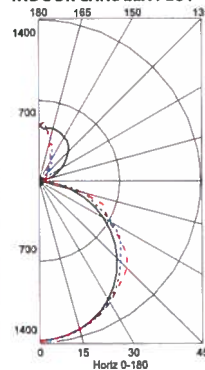INDOOR CANDELA PLOT**AVG. LUMINANCE (Candela/Sq. Ft.)**



	0.0	22.5	45.0	67.5	90.0
0	3654	3654	3654	3654	3654
30	3616	3622	3671	3726	3717
40	3578	3595	3705	3788	3833
45	3544	3582	3712	3921	4000
50	3509	3579	3776	4104	4059
55	3459	3569	3923	3905	3827
60	3387	3493	3894	3704	3667
65	3296	3477	3652	3839	3964
70	3155	3595	3718	4327	4536
75	2956	3374	4210	4353	3955
80	2674	3464	3342	2370	2355
85	2149	2967	2876	2785	2815

COEFFICIENTS OF UTILIZATION (%)

RC	70	50	30	10	70	50	30	10	50	30	10	0
1	94	90	86	82	90	86	83	79	80	77	74	62
2	85	78	71	66	81	75	69	64	69	64	61	51
3	77	68	60	54	74	65	58	53	60	55	50	42
4	71	60	52	46	67	58	50	45	53	47	42	36
5	65	53	45	39	62	51	44	38	48	41	36	31
6	60	48	39	34	57	46	38	33	43	36	32	27
7	55	43	35	30	53	42	34	29	39	32	28	24
8	51	39	31	26	49	38	31	26	35	29	25	21
9	48	36	28	23	46	35	28	23	33	26	22	19
10	45	33	26	21	43	32	25	21	30	24	20	17

RCR = Room Cavity Ratio

RC = Effective Ceiling Cavity Reflectance RW = Wall Reflectance

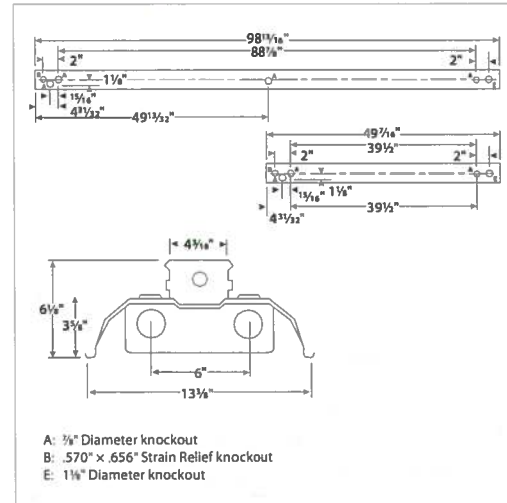DIMENSIONAL DATA**MOUNTING ACCESSORIES**

KHC




S18



KZTF



KZT



KTH

NOTE: All dimensions are in inches; dimensions and specifications are subject to change without notice. Please consult factory or check sample for verification.



Contractor: Vaughn Industries

Job Name: OSU NRD Building B

Submitted by Lighting Systems of Columbus

Lighting Systems
of Columbus, Inc.**Job Name:**OHIO STATE UNIVERSITY NORTH RESIDENTIAL
DISTRICT TRANSFORMATION**Catalog Number:**

CAD124-T817NUNV-B01X7

Notes:

Type:**D2**

LSC14-37947

**CAD
Cadillac**

Premium-Grade Surface-Mounted Cube Light With Opal Lens Retained By Spring Loaded Ends

Project
Type
Date
Cat #

Application Features

Premium-grade, surface-mounted ceiling/wall luminaire. For use with indoor applications where low-glare illumination is required. End caps are spring loaded for a clean look and allow for easy access to fixture for servicing or relamping.

**Specifications****Optical System**

Standard diffuser is soft matt white opal acrylic designed for even and low-glare illumination.

Mounting

Mounting holes are provided. Mounts over electrical junction box.

Construction

Die and brake-formed, heavy-gauge steel housing assembly. Spot-welded for rigidity and clean appearance. End-caps are spring loaded.

Finish

White, polyester powder painted housing. High-reflective coated surface for improved efficiency.

Electrical

Rotary lampholders ensure positive lamp retention. Sufficient knockouts are provided for connections and through wiring.

Approvals

Approved to CSA and UL standards.

Features

- Heavy-duty construction
- Available with 1 or 2 lamps (T5 and T8 configurations)
- Easy re-lamping and re-ballasting
- Row-mountable (requires a joiner bracket)
- Soft matt white opal acrylic wrap-around diffuser


Options & Adders

- Multi-level switching
- Dimmable and Emergency ballast
- Radio interference filter (120V - 277V)
- Prismatic acrylic overlay
- Convenience outlet
- Pull chain switch

Applications

- Corridors
- Utility Areas
- Vanities

ARCHITECTURAL LIGHTING

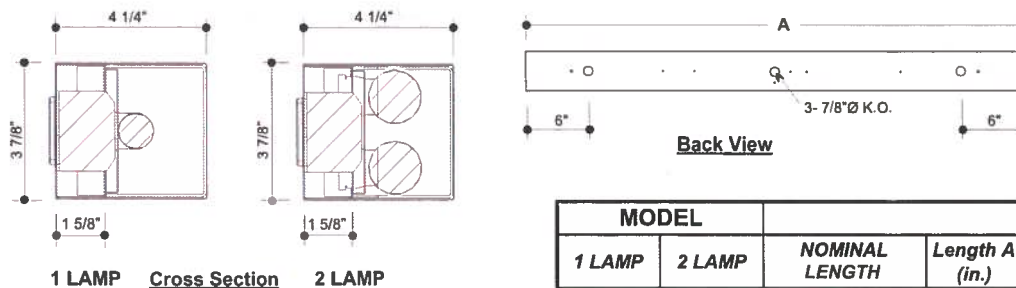Dimensions

MODEL			
1 LAMP	2 LAMP	NOMINAL LENGTH	Length A (in.)
115	215	15"	15 1/16"
118	218	18"	18 1/16"
124	224	24"	24 1/16"
136	236	36"	36 1/16"
148	248	48"	48 1/16"

Contractor: Vaughn Industries

Job Name: OSU NRD Building B

Submitted by Lighting Systems of Columbus

Lighting Systems
of Columbus, Inc.**Job Name:**OHIO STATE UNIVERSITY NORTH RESIDENTIAL
DISTRICT TRANSFORMATION**Catalog Number:**


CAD124-T817NUNV-B01X7

Notes:

Type:**D2**

LSC14-37947


Project
Type
Date
Cat #

**CAD
Cadillac**Premium-Grade Surface-Mounted Cube Light With Opal Lens
Retained By Spring Loaded Ends**Photometrics** - CAD248T832N120 - Efficiency 75.3%**Candle Distribution****Luminance Summary-CD. / SQ. M.**

ANGLE	ALONG	45	ACROSS
45	4861	5676	7099
55	3145	5033	8420
65	2225	5906	12423
75	2074	9783	21195
85	1715	28657	64856

Candle Power Summary

ZONE	LUMENS	% LAMP	% LUMINAIRE
0 - 30	506.80	8.60	11.40
0 - 40	827.80	14.00	18.60
0 - 60	1388.80	23.50	31.30
0 - 90	2210.50	37.50	49.80
40 - 90	-	-	-
60 - 90	821.7	13.90	18.50
90 - 180	2232.60	37.80	50.30
0 - 180	4443.10	75.30	100.00

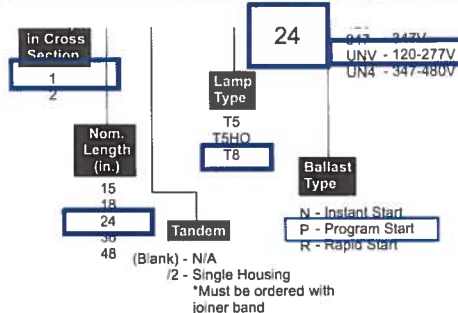Ordering
☐ B01 Ballast Disconnect - In-line Power Disconnect
(CSA UL Required For Voltages above 480V)

☐ B02 Dimming Addressable Digital (dali)

☐ B03 Dimming Low Voltage (0-10v)

☐ B04 Dimming Line Voltage

☐ B08 Ballast - High Ballast Factor

☐ B09 Ballast - Low Ballast Factor

☐ B30 Emergency Lighting Battery Pack

☐ B33 Emergency Lighting Battery Pack 1-lamp

☐ B34 Emergency Lighting Battery Pack 2-lamp
Finish Options (white is standard)
☐ F01 Black
Packaging Options (select one only)
☐ K0 Pack Bulk/ Pallet Packed and/or Wrapped
Mounting Options
☐ M15 Mounting Joiner Band
Lens and Shielding Options

(opal white acrylic is standard)

☐ P12 Lens Prismatic Acrylic - P12
Switch Options (select one only)
☐ S1 Switch Pull-chain

☐ S2 Switch Pull-chain three-way

☐ S5 Switch Toggle

☐ S6 Switch Turn
Wiring Options
☐ V02 Convenience Outlet

☐ V25 Radio Frequency Filter
Approval and Rating Options
☐ X7 Dual CSA and USA Markets
Example:

CAD248-T832PUNV-P12

Lamp Watts

Length	Nominal Lamp Watts	T5	T8
15	-	-	14
18	-	-	18
24	14	24	17
36	21	39	25
48	28	54	32

Other options may be available consult factory.
Specifications and data subject to change without notice.

Sylvania QHE Ballast

Contractor: Vaughn Industries

Job Name: OSU NRD Building B

Submitted by Lighting Systems of Columbus

Lighting Systems
of Columbus, Inc.**Job Name:**OHIO STATE UNIVERSITY NORTH RESIDENTIAL
DISTRICT TRANSFORMATION**Catalog Number:**

CAD136-T825NUNV-B01K2 X7

Notes:

Type:**D3**

LSC14-37947

**CAD
Cadillac**

Premium-Grade Surface-Mounted Cube Light With Opal Lens Retained By Spring Loaded Ends

Project
Type
Date
Cat #

Application Features

Premium-grade, surface-mounted ceiling/wall luminaire. For use with indoor applications where low-glare illumination is required. End caps are spring loaded for a clean look and allow for easy access to fixture for servicing or relamping.

**Specifications****Optical System**

Standard diffuser is soft matt white opal acrylic designed for even and low-glare illumination.

Mounting

Mounting holes are provided. Mounts over electrical junction box.

Construction

Die and brake-formed, heavy-gauge steel housing assembly. Spot-welded for rigidity and clean appearance. End-caps are spring loaded.

Finish

White, polyester powder painted housing. High-reflective coated surface for improved efficiency.

Electrical

Rotary lampholders ensure positive lamp retention. Sufficient knockouts are provided for connections and through wiring.

Approvals

Approved to CSA and UL standards.

Features

- Heavy-duty construction
- Available with 1 or 2 lamps (T5 and T8 configurations)
- Easy re-lamping and re-ballasting
- Row-mountable (requires a joiner bracket)
- Soft matt white opal acrylic wrap-around diffuser


Options & Adders

- Multi-level switching
- Dimmable and Emergency ballast
- Radio interference filter (120V - 277V)
- Prismatic acrylic overlay
- Convenience outlet
- Pull chain switch

Applications

- Corridors
- Utility Areas
- Vanities

ARCHITECTURAL LIGHTING

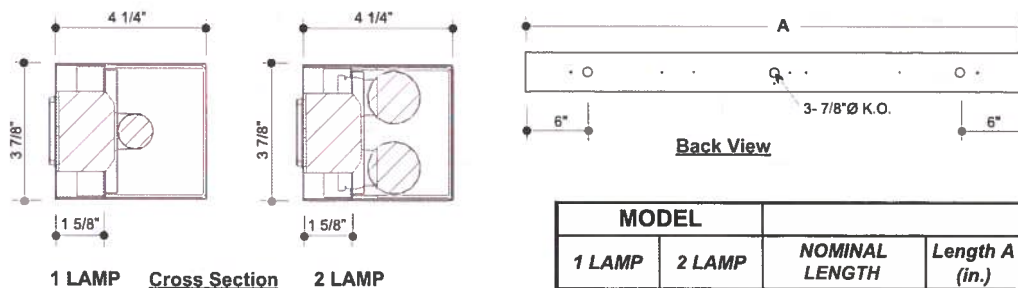Dimensions

MODEL			
1 LAMP	2 LAMP	NOMINAL LENGTH	Length A (in.)
115	215	15"	15 1/16"
118	218	18"	18 1/16"
124	224	24"	24 1/16"
136	236	36"	36 1/16"
148	248	48"	48 1/16"

Contractor: Vaughn Industries

Job Name: OSU NRD Building B

Submitted by Lighting Systems of Columbus

**Job Name:**OHIO STATE UNIVERSITY NORTH RESIDENTIAL
DISTRICT TRANSFORMATION**Catalog Number:**


CAD136-T825NUNV-B01K2 X7

Notes:

Type:**D3**

LSC14-37947


Project
Type
Date
Cat #

**CAD
Cadillac**Premium-Grade Surface-Mounted Cube Light With Opal Lens
Retained By Spring Loaded Ends**Photometrics** - CAD248T832N120 - Efficiency 75.3%**Candle Distribution****Luminance Summary-CD. / SQ. M.**

ANGLE	ALONG	45	ACROSS
45	4861	5676	7099
55	3145	5033	8420
65	2225	5906	12423
75	2074	9783	21195
85	1715	28657	64856

Candle Power Summary

ZONE	LUMENS	% LAMP	% LUMINAIRE
0 - 30	506.80	8.60	11.40
0 - 40	827.80	14.00	18.60
0 - 60	1388.80	23.50	31.30
0 - 90	2210.50	37.50	49.80
40 - 90	-	-	-
60 - 90	821.7	13.90	18.50
90 - 180	2232.60	37.80	50.30
0 - 180	4443.10	75.30	100.00

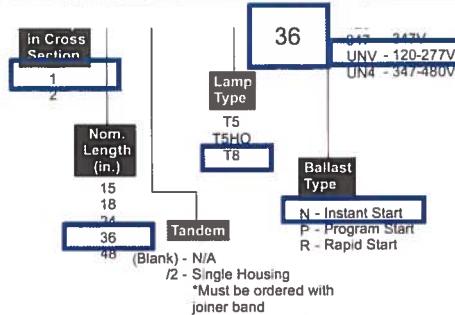Ordering
☐ B01 Ballast Disconnect - In-line Power Disconnect
(See UL Req'd For Voltage above 480V)

- ☐ B02 Dimming Addressable Digital (dali)
☐ B03 Dimming Low Voltage (0-10V)
☐ B04 Dimming Line Voltage
☐ B08 Ballast - High Ballast Factor
☐ B09 Ballast - Low Ballast Factor
☐ B30 Emergency Lighting Battery Pack Specification Grade
☐ B33 Emergency Lighting Battery Pack 1-lamp
☐ B34 Emergency Lighting Battery Pack 2-lamp

Finish Options (white is standard)
☐ F01 Black
Packaging Options (select one only)
☐ K0 Pack Bulk/ Pallet Packed and/or Wrapped
Mounting Options
☐ M15 Mounting Joiner Band
Lens and Shielding Options

(opal white acrylic is standard)

☐ P12 Lens Prismatic Acrylic - P12
Switch Options (select one only)

- ☐ S1 Switch Pull-chain
☐ S2 Switch Pull-chain three-way
☐ S5 Switch Toggle
☐ S6 Switch Turn

Wiring Options

- ☐ V02 Convenience Outlet
☐ V25 Radio Frequency Filter

Approval and Rating Options
☐ X7 Dual CSA and USA Markets
Example:

CAD248-T832PUNV-P12

Lamp Watts

Length	Nominal Lamp Watts	T5	T5HO	T8
15	-	-	-	14
18	-	-	-	15
24	14	34	42	-
36	21	39	25	-
48	28	54	32	-

Other options may be available consult factory.
Specifications and data subject to change without notice.

Sylvania - QHE2x32 Ballast

K2- 2 fixtures packaged together.

Contractor: Vaughn Industries

Job Name: OSU NRD Building B

Submitted by Lighting Systems of Columbus

Lighting Systems
of Columbus, Inc.**Job Name:**OHIO STATE UNIVERSITY NORTH RESIDENTIAL
DISTRICT TRANSFORMATION**Catalog Number:**

CAD148-T832UNV-B01K2 X7

Notes:

Type:**D4**

LSC14-37947

**CAD
Cadillac**

Premium-Grade Surface-Mounted Cube Light With Opal Lens Retained By Spring Loaded Ends

Project
Type
Date
Cat #

Application Features

Premium-grade, surface-mounted ceiling/wall luminaire. For use with indoor applications where low-glare illumination is required. End caps are spring loaded for a clean look and allow for easy access to fixture for servicing or relamping.

**Specifications****Optical System**

Standard diffuser is soft matt white opal acrylic designed for even and low-glare illumination.

Mounting

Mounting holes are provided. Mounts over electrical junction box.

Construction

Die and brake-formed, heavy-gauge steel housing assembly. Spot-welded for rigidity and clean appearance. End-caps are spring loaded.

Finish

White, polyester powder painted housing. High-reflective coated surface for improved efficiency.

Electrical

Rotary lampholders ensure positive lamp retention. Sufficient knockouts are provided for connections and through wiring.

Approvals

Approved to CSA and UL standards.

Features

- Heavy-duty construction
- Available with 1 or 2 lamps (T5 and T8 configurations)
- Easy re-lamping and re-ballasting
- Row-mountable (requires a joiner bracket)
- Soft matt white opal acrylic wrap-around diffuser


Options & Adders

- Multi-level switching
- Dimmable and Emergency ballast
- Radio interference filter (120V - 277V)
- Prismatic acrylic overlay
- Convenience outlet
- Pull chain switch

Applications

- Corridors
- Utility Areas
- Vanities

ARCHITECTURAL LIGHTING

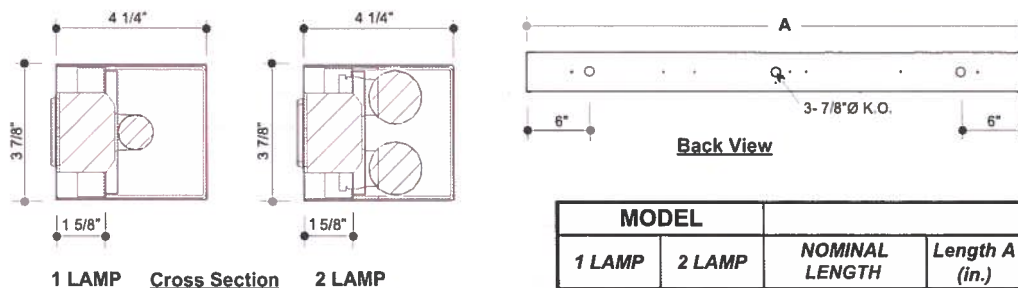Dimensions

MODEL			
1 LAMP	2 LAMP	NOMINAL LENGTH	Length A (in.)
115	215	15"	15 1/16"
118	218	18"	18 1/16"
124	224	24"	24 1/16"
136	236	36"	36 1/16"
148	248	48"	48 1/16"

Contractor: Vaughn Industries

Job Name: OSU NRD Building B

Submitted by Lighting Systems of Columbus

**Job Name:**OHIO STATE UNIVERSITY NORTH RESIDENTIAL
DISTRICT TRANSFORMATION**Catalog Number:**


CAD148-T832UNV-B01K2 X7

Notes:

Type:**D4**

LSC14-37947


Project
Type
Date
Cat #

**CAD
Cadillac**Premium-Grade Surface-Mounted Cube Light With Opal Lens
Retained By Spring Loaded Ends**Photometrics** - CAD248T832N120 - Efficiency 75.3%**Candle Distribution****Luminance Summary-CD. / SQ. M.**

ANGLE	ALONG	45	ACROSS
45	4861	5676	7099
55	3145	5033	8420
65	2225	5906	12423
75	2074	9783	21195
85	1715	28657	64856

Candle Power Summary

ZONE	LUMENS	% LAMP	% LUMINAIRE
0 - 30	506.80	8.60	11.40
0 - 40	827.80	14.00	18.60
0 - 60	1388.80	23.50	31.30
0 - 90	2210.50	37.50	49.80
40 - 90	-	-	-
60 - 90	821.7	13.90	18.50
90 - 180	2232.60	37.80	50.30
0 - 180	4443.10	75.30	100.00

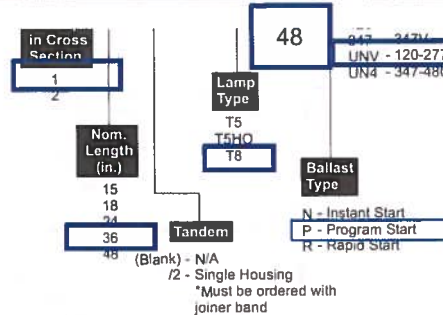Ordering**Example:**

CAD248-T832PUNV-P12

Lamp Watts

Length	Nominal Lamp Watts	T5	T5HO	T8
15	-	-	-	14
18	-	-	-	15
24	14	24	17	-
36	21	30	25	-
48	28	54	32	-

Other options may be available consult factory.
Specifications and data subject to change without notice.

- ☐ B01 Ballast Disconnect - In-line Power Disconnect
(90A UL Required For Voltages above 480V)
- ☐ B02 Dimming Addressable Digital (dali)
- ☐ B03 Dimming Low Voltage (0-10v)
- ☐ B04 Dimming Line Voltage
- ☐ B08 Ballast - High Ballast Factor
- ☐ B09 Ballast - Low Ballast Factor
- ☐ B30 Emergency Lighting Battery Pack Specification Grade
- ☐ B33 Emergency Lighting Battery Pack 1-lamp
- ☐ B34 Emergency Lighting Battery Pack 2-lamp

Finish Options (white is standard)

- ☐ F01 Black

Packaging Options (select one only)

- ☐ K0 Pack Bulk/ Pallet Packed and/or Wrapped

Mounting Options

- ☐ M15 Mounting Joiner Band

Lens and Shielding Options

(opal white acrylic is standard)

- ☐ P12 Lens Prismatic Acrylic - P12

Switch Options (select one only)

- ☐ S1 Switch Pull-chain
- ☐ S2 Switch Pull-chain three-way
- ☐ S5 Switch Toggle
- ☐ S6 Switch Turn

Wiring Options

- ☐ V02 Convenience Outlet
- ☐ V25 Radio Frequency Filter

Approval and Rating Options

- ☐ X7 Dual CSA and USA Markets

Sylvania - QHE2x32 Ballast

K2- 2 fixtures packaged together.

Contractor: Vaughn Industries

Job Name: OSU NRD Building B

Submitted by Spectrum Lighting, Inc.



Job Name:
OSU - NRD BUILDINGS

Catalog Number:
5010-48-WEC-232L-UNV-ELBPR

Notes:

Type:**D5**

SPEC14-5147

5010

Economical bath and vanity luminaire is available in a variety of lamp and ballast combinations to ensure just the right light for the task.


STANDARD SPECIFICATIONS

HOUSING: Steel, white painted finish with chrome plated or white painted endcaps

DIFFUSER: White acrylic

BALLAST: 120-277V HPF Electronic

LAMP: Linear fluorescent (T8)

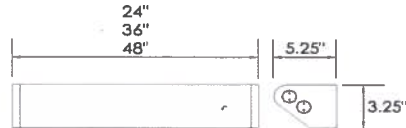**ORDERING INFORMATION**

5010-48-WEC-232L-UNV-ELBPR

2. SIZE

24 L: 24"
36 L: 36"
48 L: 48"

3. WATTAGE**24 SIZE**

17L 1-17W T8, elec. HPF
217L 2-17W T8, elec. HPF

36 SIZE

25L 1-25W T8, elec. HPF
225L 2-25W T8, elec. HPF

48 SIZE

32L 1-32W T8, elec. HPF
232L 2-32W T8, elec. HPF

4. ENDCAPS

CEC Chrome
WEC White

5. AVAILABLE OPTIONS

BAC Buy American Compliant
BBI Integral Battery Backup
BBIC Integral Battery Backup, Cold Weather (36 or 48 size only)
CO Convenience Outlet (120v)
ES4 ENERGY STAR® (elec., HPF) (120v only)
PC Pull Chain (120 volt)

**ELBPR = ELECTRONIC
BALLAST PROGRAM RAPID
START TO BE INSTALLED**



Specifications and dimensions subject to change without notice.
Consult your Brownlee Lighting representative for availability and ordering information

REVISED
2012.1.31

Date Submitted: Sept. 2, 2015

Distributor: C.E.D. Columbus, Oh 43207

Contractor: Vaughn Industries

Job Name: OSU NRDT Building B

HALO®**Description**

The Halo RL560 is a complete LED Baffle-Trim Module for 5" and 6" aperture recessed downlights; suitable for new construction, remodel and retrofit installation. The RL560 is cULus Listed for use with Halo and All-Pro, and is UL Classified for use with other compatible 5" and 6" housings. The RL560 with integral LED driver offers 120 volt dimming capability. The RL560 lens provides uniform illumination and wet location listing. Precision construction makes any housing AIR-TITE for added HVAC savings and code compliance.

Catalog #	H750ICAT RL560WH683	Type
Project	RL56TRIMSN	F2 + F11
Comments	OSU - NRDT	Date
Prepared by		

Specification Features**MECHANICAL
Module - Trim**

- Module construction includes LED, heat sink, reflector, lens, baffle and trim ring
- Regressed baffle
- Heat sink designed to conduct heat away from the LED keeping the junction temperatures below specified maximums, even when installed in insulated ceiling environments
- Designer trim finish options (sold separately)
 - White (Paintable) Trim Ring
 - Satin Nickel Trim Ring
 - Tuscan Bronze Trim Ring

Lens

- Regressed lens
- Impact-resistant polycarbonate
- Convex form for lamp-like appearance
- High lumen transmission
- Diffusing for even illumination

Mounting

- Push-N-Twist universal installation clips
- Pre-installed clips designed to fit industry standard 5" and 6" recessed housings

Housing Compatibility

See Housing Compatibility

LED

- Color Temperature (CCT)* Options: 2700K, 3000K, 3500K, and 4000K
- CRI options: 80 and 90†
 - 90 CRI can be used for California Title 24 compliance/certified to Title 20
 - 80 CRI can be used to comply with California Title 24 Non-Residential Lighting Controls requirements as an LED luminaire

LED Chromaticity

- A tight chromaticity specification ensures LED color uniformity,

sustainable Color Rendering Index (CRI) and Correlated Color Temperature (CCT) over the useful life of the LED

- LED chromaticity of 3 SDCM exceeds ENERGY STAR® color standards per ANSI C78.377- 2008
- 90 CRI model features high color performance with R9 greater than 50
- Every Halo LED is quality tested, measured, and serialized in a permanent record to register lumens, wattage, CRI and CCT
- Halo LED serialized testing and measurement ensures color and lumen consistency on a per-unit basis, and validates long-term product consistency over time

ELECTRICAL**Power Connections**

- LED connector is a non-screw base luminaire disconnect offering easy installation with the matching Halo 5" and 6" LED housings
- LED Connector meets California Title-24 high efficacy luminaire requirement for a non-screw base socket, and where required to qualify as a high efficacy luminaire
- The included E26 medium screw-base Edison adapter provides easy retrofit of incandescent housings (see Housing Compatibility)

Ground Connection

Separate grounding cable included on the module for attachment to the housing during installation.

LED Driver

- Integral to the housing, 120V 50/60 Hz constant current dimmable driver provides high-efficiency operation
- Driver meets FCC 47CFR Part 15 EMI/RFI consumer limits for use in residential and commercial installations
- Driver features high power factor and low THD and has integral thermal protection in the event of over

temperature or internal failure

- If dimming is not required the fixture can be operated from a standard wall switch

Dimming

- Designed for continuous dimming capability to nominally 5% with many 120V Leading Edge (LE) and Trailing Edge (TE) Phase Control dimmers. (Dimmers with low end trim adjustment offer greater assurance of achieving 5% level.)
- Consult dimmer manufacturer for compatibility and conditions of use

Note: some dimmers require a neutral in the wallbox.

Warranty

Cooper Lighting provides a five year limited warranty on RL56 LED.

Compliance**Labels**

- UL/cUL Listed 1598 Luminaire (with listed housings)
- UL Classified (with other housings - see Housing Compatibility)
- UL/cUL Listed for Damp Location
- UL/cUL Listed for Wet Location - Shower Applications
- IP56 Ingress Protection rated
- May be installed in housings in direct contact with insulation** and combustible material

Compliance

- Airtight certified per ASTM E283 (not exceeding 2.0 CFM under 57 Pascals pressure difference)
- 90 CRI: Can be used to comply with California Title 24 High Efficacy requirements. Certified to California Title 20 Appliance Efficiency Database.*
- 80 CRI: Can be used to comply with California Title 24 Non-Residential Lighting Controls requirements as an LED luminaire
- Can be used for International Energy Conservation Code (IECC) high efficiency luminaire compliance.

**RL560WH6***

White

600 Series 5/6-Inch LED Recessed Retrofit Module-Trim

80CRI
2700K, 3000K,
3500K, 4000K

90CRI
2700K, 3000K,
3500K, 4000K


**FOR USE IN
INSULATED CEILING
AND NON- INSULATED
CEILING RATED
HOUSINGS**

**HIGH-EFFICACY LED
WITH INTEGRAL
DRIVER - DIMMABLE**



Refer to ENERGY STAR® Certified Products List.

Can be used to comply with California Title 24 Non-Residential Lighting Controls requirements as a LED Luminaire.



Refer to ENERGY STAR® Certified Products List.

Can be used to comply with California Title 24 High Efficacy requirements. Certified to California Title 20 Appliance Efficiency Database.

- * Refer to ENERGY STAR® Certified Products List and CEC (T20) Appliance Database for listings.

- ** Not for use with housings in direct contact with spray foam insulation.

- † See ordering information table for available models.

Cooper Lighting

by **E-T-N**

Date Submitted: Sept. 2, 2015

Distributor: C.E.D. Columbus, Oh 43207

TD518004EN
March 25, 2015

RL56 LED System
600 Series


Contractor: Vaughn Industries

Specification Features Continued

- Can be used for Washington State Energy Code compliance
- ENERGY STAR® Certified luminaire - consult ENERGY STAR® Certified Product List*
- EMI/RFI per FCC 47CFR Part 15 Class B Consumer limits, suitable for use in residential and commercial installations
- Contains no mercury or lead and RoHS compliant.
- Photometric testing in accordance with IES LM-79
- Lumen maintenance projections in accordance with IES LM-80 and TM-21

TYPES F2 + F11

RL56 Dimensions

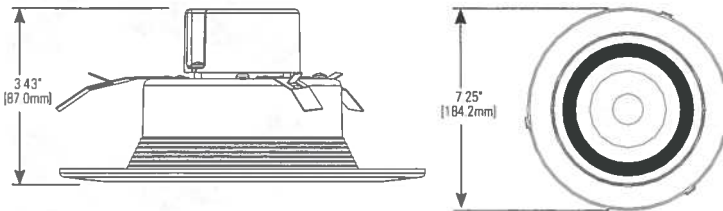

Energy Data

RL56 Series (Values at non-dimming line voltage)

Minimum Starting Temp: -30°C (-22°F)

EMI/RFI: FCC Title 47 CFR, Part 15, Class B (Consumer)

Sound Rating: Class A

Input Voltage: 120V

Power Factor: >0.90

Input Frequency: 60Hz

THD: <20%

Input Power: 10.5W - RL560WH6827, RL560WH6927, RL560WH6930, RL560WH6935

10W - RL560WH6940, RL560WH6940R, RL560WH6940C

9.4W - RL560WH6830, RL560WH6835


9W - RL560WH6840, RL560WH6840R, RL560WH6840C

Input Current: 0.15A

Maximum IC (Insulated Ceiling) Ambient Continuous Operating Temperature: 25°C (77°F)

Maximum Non-IC Ambient Continuous Operating Temperature: 40°C (104°F)

Designer Trim Dimensions

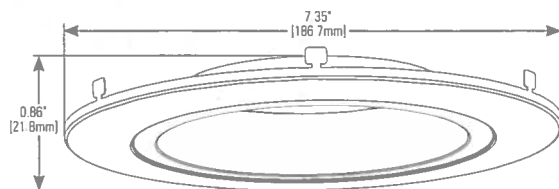

RL56TRMWH
White (Paintable)



RL56TRMTBZ
Tuscan Bronze



RL56TRMSN
Satin Nickel



E26 Screw base adapter for retrofit (included)

Ordering Information

Sample Number: **RL560WH6827-RL56TRMWH**

Complete unit includes a RL56 Baffle-Trim LED Module and a 5" or 6" compatible housing, ordered separately. Optional accessory designer trim ring ordered separately.

RL56 600 Series

80 CRI

RL560WH6827= 5"/6" Retrofit Baffle - Trim LED Module, 80CRI, 2700K, Matte White

RL560WH6830= 5"/6" Retrofit Baffle - Trim LED Module, 80CRI, 3000K, Matte White

RL560WH6835= 5"/6" Retrofit Baffle - Trim LED Module, 80CRI, 3500K, Matte White

RL560WH6840= 5"/6" Retrofit Baffle - Trim LED Module, 80CRI, 4000K, Matte White

90 CRI

RL560WH6927= 5"/6" Retrofit Baffle - Trim LED Module, 90CRI, 2700K, Matte White

RL560WH6930= 5"/6" Retrofit Baffle - Trim LED Module, 90CRI, 3000K, Matte White

RL560WH6935= 5"/6" Retrofit Baffle - Trim LED Module, 90CRI, 3500K, Matte White

RL560WH6940= 5"/6" Retrofit Baffle - Trim LED Module, 90CRI, 4000K, Matte White

Accessory (Order Separately)

RL56TRMSN=5/6" Satin Nickel Trim Ring

RL56TRMTBZ=5/6" Tuscan Bronze Trim Ring

RL56TRMWH=5/6" White Paintable Trim Ring

RL56CLIP=Replacement kit of 5" and 6" Friction Clips for retrofitting into an existing housing without torsion spring receiving brackets. (One set of clips included with the unit.)

OT400P=Oversize Flat White Metal Trim Ring 6" I.D. x 9-1/4" O.D. (ring slips behind RL56 ring, in stepped configuration)

OT403P=Oversize White Plastic Trim Ring 6" I.D. x 8" O.D. (ring slips behind RL56 ring, in stepped configuration)

TRM690WH=Oversize Matte White Metal Trim Ring. Designed for RL560 ring to inset into oversize ring for an even (non-stepped) trim surface

HE26LED=Replacement screw base adapter (one included with unit)

Housing Compatibility

RL56 Series LED Retrofit is UL Classified for retrofit in the follow 5/6" recessed housings:

The RL Series LED light module - trim combination is cULus Listed or UL Classified for use with any 5/6" diameter recessed housing constructed of steel or aluminum with an internal volume that exceeds 107.9 in³ in addition to those noted above.

Cooper Lighting

by **E-T-N**

Distributor: C.E.D. Columbus, Oh 43207

Contractor: Vaughn Industries

Job Name: OSU NRDT Building B

RL56 LED System
600 Series**TYPES F2 + F11****HOUSINGS - Halo and All-Pro UL Listed Compatibility****Compatible Halo LED Housings with LED luminaire connector (high efficacy compliant - Title 24, IECC, WSEC)**

Recessed Can Size	Catalog Number	Description
5"	H550ICAT	5" LED, Insulated Ceiling, AIR-TITE, New Construction Housing
	H550RICAT	5" LED, Insulated Ceiling, AIR-TITE, Remodel Housing
	H750ICAT	6" LED, Insulated Ceiling, AIR-TITE, New Construction Housing
6"	H750RICAT	6" LED, Insulated Ceiling, AIR-TITE, Remodel Housing
	H750T	6" LED, Non-IC, AIR-TITE, New Construction Housing
	H750RINTD010	6" LED, Non-IC, AIR-TITE, Remodel International Housing
	H750TCP	6" LED, Non-IC, New Construction/Remodel Chicago Plenum Housing
	H2750ICAT	6" LED, Shallow, Insulated Ceiling, AIR-TITE, New Construction Housing

Compatible Halo Incandescent E26 Screwbase Housings

5"	H5ICAT	5" Insulated Ceiling, AIR-TITE New Construction Housing
	H5RICAT	5" Insulated Ceiling, AIR-TITE Remodel Housing
	H5T	5" Non-IC, New Construction Housing
	H5RT	5" Non-IC, Remodel Housing
	H5TM	5" Non-IC, New Construction Housing (metric version - Canada)
6"	H25ICAT	5" Shallow, Insulated Ceiling, AIR-TITE New Construction
	H7ICAT	6" Insulated Ceiling, AIR-TITE New Construction Housing
	H7RICAT	6" Insulated Ceiling, AIR-TITE Remodel Housing
	H7ICT	6" Insulated Ceiling, New Construction Housing
	H7RICT	6" Insulated Ceiling, Remodel Housing
	H7ICATNB	6" Insulated Ceiling, AIR-TITE New Construction Housing, No Socket Bracket
	H7ICTNB	6" Insulated Ceiling, New Construction Housing, No Socket Bracket
	H7T	6" Non-IC, New Construction Housing
	H7RT	6" Non-IC, Remodel Housing
	H7TNB	6" Non-IC, New Construction Housing, No Socket Bracket
	H7TCP	6" Non-IC, Chicago Plenum, New Construction/Remodel Housing
	H7UICAT	6" Insulated Ceiling, Universal New Construction Housing
	H7UICAT	6" Insulated Ceiling, Universal, AIR-TITE, New Construction Housing
	H27ICAT	6" Shallow, Insulated Ceiling, AIR-TITE New Construction Housing
	H27RICAT	6" Shallow, Insulated Ceiling, AIR-TITE Remodel Housing
	H27ICT	6" Shallow, Insulated Ceiling, New Construction Housing
	H27RICT	6" Shallow, Insulated Ceiling, Remodel Housing
	H27T	6" Shallow, Non-IC, New Construction Housing
	H27RT	6" Shallow, Non-IC, Remodel Housing
	ML7BXRFK	6" Retrofit Enclosure, Non-IC, BX Whip
	ML7E26RFK	6" Retrofit Enclosure, Non-IC, E26 Screw base Interface

All-Pro Compatible Incandescent E26 Screwbase Housings

5"	EI500AT	5" Insulated Ceiling, AIR-TITE New Construction Housing
	EI500RAT	5" Insulated Ceiling, AIR-TITE Remodel Housing
	ET500	5" Non-IC, New Construction Housing
	ET500R	5" Non-IC, Remodel Housing
6"	EI700AT	6" Insulated Ceiling, AIR-TITE New Construction Housing
	EI700RAT	6" Insulated Ceiling, AIR-TITE Remodel Housing
	EI700	6" Insulated Ceiling, New Construction Housing
	EI700R	6" Insulated Ceiling, Remodel Housing
	EI700ATNB	6" Insulated Ceiling, AIR-TITE New Construction Housing, No Socket Bracket
	EI700NB	6" Insulated Ceiling, New Construction Housing, No Socket Bracket
	EI700U	6" Insulated Ceiling, Universal New Construction Housing
	EI700UAT	6" Insulated Ceiling, Universal, AIR-TITE, New Construction Housing
	ET700	6" Non-IC, New Construction Housing
	ET700R	6" Non-IC, Remodel Housing
	EI2700AT	6" Shallow, Insulated Ceiling, AIR-TITE New Construction Housing
	EI2700	6" Shallow, Insulated Ceiling, New Construction Housing
	EI2700R	6" Shallow, Insulated Ceiling, AIR-TITE Remodel Housing
	ET2700	6" Shallow, Non-IC, New Construction Housing
	ET2700R	6" Shallow, Non-IC, Remodel Housing


Contractor: Vaughn Industries
RL56 LED System
600 Series

Lighting Facts


RL560WH6827
2700K Source




RL560WH6830
3000K Source

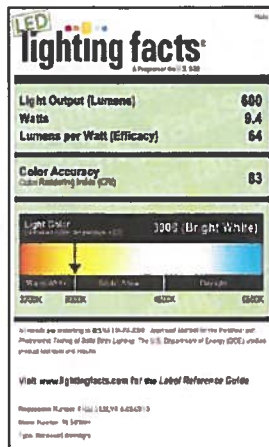


RL560WH6835
3500K Source

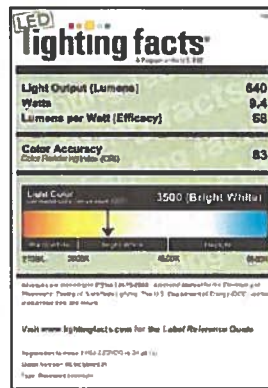


RL560WH6840
4000K Source

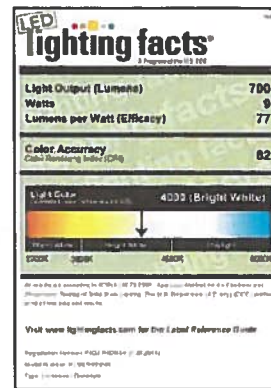


RL560WH6930
3000K Source

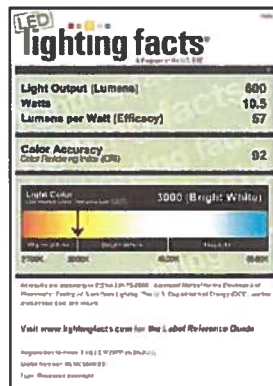

RL560WH6935
3500K Source

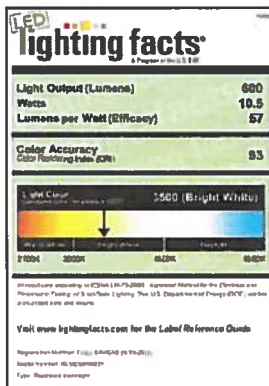

RL560WH6940
4000K Source

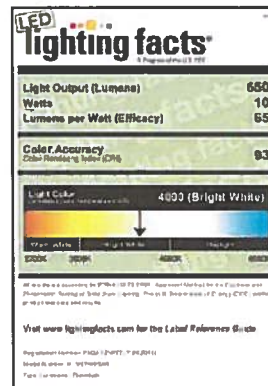

Contractor: Vaughn Industries

DOWNLIGHTS

LCLCV6 - 6" DOWNLIGHT SERIES

FEATURES

CONSTRUCTION

- Side lit design for an ultra thin profile
- IC rated, IP44-suitable for damp or dry locations
- Wide beam angle (120°) for better spacing
- CE and cULus rated
- RoHS compliant
- 5 year warranty (standard)

ELECTRICAL

- Dimmable (via driver or using PWM)⁽¹⁾
- Constant voltage design allows for multiple lights per driver
- LM-80 and LM-79 available
- Downlights should be placed within 50 feet of driver
- Rated at 12W max AC power (10W DC)⁽⁵⁾

Project Name	OSU NRDT
Date	
Type	F12

T/LT

TILT Part Number	LCL CV 6 35W
TILT Driver	LDND16

LUMEN PACKAGES (6" DOWNLIGHT) ⁽¹⁾				
CCT	50,000 hours (L70)			
	STANDARD 90+ CRI, R9 >50			
5000k	Lumens	750	696	439
	LPW	62.3	63.6	65.6
4000k	Lumens	700	550	352
	LPW	56.1	59.5	61.3
3500k	Lumens	675	514	329
	LPW	53.3	57.2	58.9
3000k	Lumens	650	478	306
	LPW	50.6	54.8	56.4

ORDERING INFORMATION

LCL	CV	6	50	W
Fixture Type	Distribution Type	Size	CCT	Frame Color ⁽⁴⁾
LCL - Light	CV - Constant Voltage	6 - 6"	50 - 5,000K 40 - 4,000K 35 - 3,500K 30 - 3,000K	W - White B - Black S - Silver + - special order

USE WITH

Driver	
LDND16	LD16PE7
LD16	LD60PE7
LD60	LD90PE7
LD60P	LD100PE7
LD90	
LD100P	

DRIVER SPECIFICATION

NOTE on DRIVERS: UL 8750, short circuit, over current, over voltage, and over temperature protection
UL registered and CE rated, RoHS compliant
Class II, SELV, IP67

Model ⁽³⁾	Size in Inches (LxWxH)	AC Input	DC Output	Dimming ⁽⁹⁾	Temp	Max Fixtures ⁽⁸⁾
LDND16	3.00" x 1.50"	90 - 264VAC	16W	I-10V	-40C - 60C	1
LD16	6.00" x 1.625"	90 - 305VAC	16W	I-10V	-40C - 60C	1
LD60	6.50 x 1.63 x 1.26	90 - 305V	60W	I-10V	-40C - 60C	5
LD60P	12.50 x 2.38 x 1.50	90 - 305V	60W	I-10V	-40C - 70C	5
LD90	6.34 x 2.40 x 1.26	90 - 305V	90W	I-10V	-40C - 60C	8
LD100P	14.50 x 2.63 x 1.58	90 - 305V	100W	I-10V	-40C - 60C	8

Emergency ⁽⁷⁾	Size in Inches (LxWxH)	AC Input	Output ⁽⁶⁾	Lumens	Temp	Max Fixtures ⁽⁸⁾
LD16PE7	13.00 x 5.50 x 1.75	90 - 305V	7W for 90 mins	400 - 600	0C - 50C	1
LD60PE7	13.00 x 5.50 x 1.75	90 - 305V	7W for 90 mins	400 - 600	0C - 50C	4
LD90PE7	13.00 x 5.50 x 1.75	90 - 305V	7W for 90 mins	400 - 600	0C - 50C	8
LD100PE7	13.00 x 5.50 x 1.75	90 - 305V	7W for 90 mins	400 - 600	0C - 50C	8

NOTES (NUMBERS)

- (1) See driver or dimming product sheet for specific details
- (2) AC W used for circuit power, DC W used for driver circuit
- (3) Lumen packages provided using Dim Chip with driver
- (4) Colors other than white are custom
- (5) "P" designation after watt rating denotes Plenum Rated
- (6) Based on watt load of fixtures and driver output
- (7) See Product Sheet for Emergency Drivers
- (8) Safe amount of fixtures per driver
- (9) TILT drivers use a I-10V control but are compatible with most 0-10V control systems. For details specific to your system, contact us at 855.440.8458




Contractor: Vaughn Industries

Job Name: OSU NRD T Building B

TILT DOWNLIGHT SERIES LCLCV6

PHOTOMETRIC CHARTS WITH TESTING DATA. CALL FOR SPECIFIC INFORMATION NOT LISTED HERE: 855.440.8458

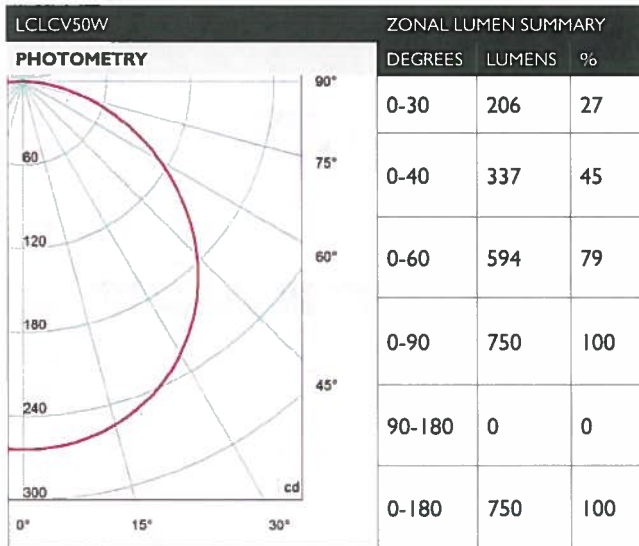

LUMINANCE SUMMARY CD./SQ.M.

ANGLE	ALONG
45	18713
55	17704
65	16293
75	14151
85	10051

COEFFICIENT OF UTILIZATION

	80%			70%			50%		
	70	50	30	70	50	30	50	30	10
0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11
1	1.10	1.05	1.01	1.07	1.03	0.99	0.99	0.96	0.93
2	1.00	0.93	0.87	0.98	0.91	0.85	0.87	0.83	0.78
3	0.92	0.82	0.74	0.90	0.80	0.73	0.78	0.72	0.66
4	0.85	0.73	0.65	0.83	0.72	0.65	0.70	0.63	0.58
5	0.78	0.66	0.57	0.76	0.64	0.56	0.62	0.55	0.50
6	0.72	0.59	0.50	0.70	0.58	0.50	0.56	0.49	0.43
7	0.66	0.53	0.44	0.64	0.52	0.44	0.50	0.43	0.38
8	0.61	0.48	0.39	0.60	0.47	0.39	0.46	0.38	0.33
9	0.57	0.43	0.35	0.55	0.43	0.35	0.41	0.34	0.29
10	0.53	0.40	0.31	0.51	0.39	0.31	0.38	0.31	0.26

NOTES

- Lifespan: 50,000 hrs (L70)
- LM79 and LM80 available upon request. Call 855.440.8458
- IES files available online at: laurenillumination.com/resources



Lauren Illumination is a Lauren International Company.
 ©Lauren Illumination and ©TILT are registered trademarks of Lauren Illumination
 2162 Reiser Avenue SE | New Philadelphia, OH 44663 P: 855.440.8458 | F: 330.339.1515
laurenillumination.com | laureninternational.com

Contractor: Vaughn Industries

Job Name: OSU NRD Building B

Submitted by Lighting Systems of Columbus




Job Name:
OHIO STATE UNIVERSITY NORTH RESIDENTIAL
DISTRICT TRANSFORMATION

Catalog Number:
LF6CFV32EB 6CFVCRDL
TRG
Notes:

Type:
F25

LSC14-37947



6" Vertical Triple Tube Lensed Downlight

LF6CFV

One 26W, 32W or 42W Triple Tube
Compact Fluorescent
4-pin Lamp
120V-277V

APPLICATIONS:

The LF6CFV offers a vertically lamped compact fluorescent lensed downlight fixture. The multi-watt, multi-volt ballast provides the ability to change wattages by simply changing the lamp. This luminaire is ideal for a wide variety of low to medium height ceiling applications including commercial, retail, hospitality, and design build.

HOUSING:

One-piece 22-gauge galvanized steel platform. Prewired J-box with snap-on cover for easy access. Same housing accommodates downlight, wall wash downlight, and lensed downlight reflectors.

REFLECTOR:

High purity aluminum, Alzak, iridescence suppressed, semi-diffuse reflector. Self-trim standard. White painted splay standard.

BALLAST:

One (1) compact fluorescent Class 'P' electronic multi-volt (120V through 277V) HPF ballast suitable for operating all 26W, 32W, and 42W triple tube lamps. All ballast options are equipped with EOL protection. Accessible from below ceiling. Contact technical support for 347V.

LAMP:

Use one (1) 26W (GX24q-3 base), 32W (GX24q-3 base), or 42W (GX24q-4 base) 4-pin triple tube compact fluorescent lamp. Lamp furnished by others or as option below.

SOCKET:

One (1) injection molded socket suitable for 26W, 32W, and 42W triple tube lamps (vented). Adjusts to two positions, upper position for 42W and lower position for 26W/32W, accommodating various lamp sizes and ensuring proper lamp position.

INSTALLATION:


Universal adjustable mounting brackets accept 1/2" EMT conduit or 1 1/2" or 2 1/2" lathing channel (by others) or Prescolite 24" bar hangers (B24 or B6). Light commercial bar hangers included.

LABELS:

UL listed or UL/CSA listed with CDN option for wet locations with lensed trims. UL, CUL listed for damp locations for EMR housing option. Approved for through wiring (4 in, 4 out) Non-IC type.

LAMP INCLUDED OPTION:



Specify lamp type T (Triple 4-pin) and temperature as shown below.



DATE: _____ TYPE: _____
FIRM NAME: _____
PROJECT: _____

LiteFrame

WiHUBB Ceiling Cutout: 6-1/4"
Maximum Ceiling Thickness: 1-1/4"
For conversion to millimeters,
multiply inches by 25.4
Not to Scale



Order housing, reflector and accessories separately.

CATALOG NUMBER:

EXAMPLE: LF6CFV32EB 6CFVCGFL LP32T30K

HOUSING	WATTAGE	BALLAST	VOLTAGE	HSG. OPTIONS	REFLECTOR	SPLAY COLOR	LENS	TRIM OPTIONS	ACCESSORIES
<input type="checkbox"/> LF6CFV	<input type="checkbox"/> 32	<input type="checkbox"/> EB	<input type="checkbox"/> Blank	<input type="checkbox"/> CP ²	<input type="checkbox"/> 6CFV	<input type="checkbox"/> Blank	<input type="checkbox"/> FL	<input type="checkbox"/> WT	<input type="checkbox"/> B24
	26/32/42W Electronic Triple Tube		120V-277V	Chicago Plenum CP fixture height is 11 1/8"	6" Alzak Semi-Diffuse	Painted White	Regressed Fresnel	White Flange (Alzak Only)	Set of (2) 24" bar hangers for T-bar ceilings
			<input type="checkbox"/> CDN	<input type="checkbox"/> FSDFA		<input type="checkbox"/> CR	<input type="checkbox"/> PL	<input type="checkbox"/> TRG	<input type="checkbox"/> B6
			Canadian Electrical code compliant ballast disconnect	Fuse kit installed at factory		Clear Alzak	Regressed Prismatic	Trim Ring Gasket (factory installed)	Set of (2) bar hangers for ceiling joists up to 24" centers
			<input type="checkbox"/> CDN 347V ³	<input type="checkbox"/> RIF1 ^{1,2}	<input type="checkbox"/> XDM	<input type="checkbox"/> CG	<input type="checkbox"/> DL	<input type="checkbox"/> FSDFI	<input type="checkbox"/> SCA6
			Canadian Electrical code compliant ballast disconnect	Radio interference filter (single circuit)	Advance Mark 10 TM Dimming Ballast to 5%, 2-wire line voltage (specify voltage)	Champagne Gold Alzak	Regressed Diffuse	Fuse kit for field installation	Sloped ceiling adapter (see note on back page)
				<input type="checkbox"/> EMR ^{2,3}	<input type="checkbox"/> HDM ⁷	<input type="checkbox"/> PW	<input type="checkbox"/> CL		
				Emergency battery pack with remote test switch and indicator light	Lutron Hi-Lume [®] Dimming Ballast to 1%, 3-wire line voltage (specify voltage)	Pewter Alzak	Regressed Clear		
				<input type="checkbox"/> DM	<input type="checkbox"/> 2DM ^{7,8}	<input type="checkbox"/> WE			
				Electronic Analog Dimming Ballast to 3%, 4-wire, 0-10V (120-277V)	Lutron Tu-Wire Dimming Ballast to 5, 2-wire, line voltage (120V only)	<input type="checkbox"/> LW			
				<input type="checkbox"/> MW26	<input type="checkbox"/> SMT	<input type="checkbox"/> WH			
				Max Wattage label, 26W	Philips Advance SmartMate [®] ballast	Light Wheat Alzak			
				<input type="checkbox"/> MW32	<input type="checkbox"/> WH				
				Max Wattage label, 32W	WiHUBB [®] Enabled (see page 3)				
				<input type="checkbox"/> SYL ⁴					
				Osram Sylvania Ballast (available only for standard EB option)					
				<input type="checkbox"/> ECDM ⁶					
				Lutron EcoSystem or 3-wire line voltage dimming ballast (120-277V). Dims to 5%.					

¹RIF1 and EMR options not offered in combination
²CP not offered in combination with RIF1 or EMR
³UL, CUL listed for damp locations
⁴Available for Osram Sylvania Quick 60+* Limited Warranty when used with Osram lamp(s). See www.prescolite.com for details.
⁵Dimming option not available for 347V
⁶For 42W specify LF6CFV42EBECDDM
⁷Not available for 42W
⁸For 26W specify LF6CFV26EB2DM. 32W specify LF6CFV32EB2DM

prescolite
A Division of Hubbell Lighting, Inc.

In a continuing effort to offer the best product possible we reserve the right to change, without notice, specifications or materials that in our opinion will not alter the function of the product.
Web: www.prescolite.com • Tech Support: (888) 777-4832

LFR-CFL-017

Date Submitted: Sept. 2, 2015

Distributor: C.E.D. Columbus, Oh 43207

Contractor: Vaughn Industries

Job Name: OSU NRD Building B

Submitted by Lighting Systems of Columbus

**Job Name:**OHIO STATE UNIVERSITY NORTH RESIDENTIAL
DISTRICT TRANSFORMATION**Catalog Number:**

LF6CFV32EB 6CFVCRDL

TRG

Notes:

Type:**F25**

LSC14-37947

PHOTOMETRIC DATA**LiteFrame® - 6" Vertical Triple Tube
Lensed Downlight - LF6CFV****BALLAST DATA CFLH1/CFLV**

	26W Triple			32W Triple			42W Triple		
	120V	277V	347V	120V	277V	347V	120V	277V	347V
Total System Watts	29	29	31	36	36	36	46	46	50
Input Current (Amps)	0.24	0.11	0.09	0.31	0.13	0.11	0.38	0.17	0.15
Input Frequency in Hz	50/60	50/60	50/60	50/60	50/60	50/60	50/60	50/60	50/60
Power Factor < 98	< 98	< 95		< 98	< 98	< 95	< 98	< 98	< 95
Ballast Factor < 1.1	< 1.1	< 1.02		< 98	< 98	< 98	< 98	< 98	< 1.0
Total Harmonic Distortion	< 10%	< 10%	< 10%	< 10%	< 10%	< 10%	< 10%	< 10%	< 10%

LAMP DATA CFLH1/CFLV

Rated Watts	26W Triple	32W Triple	42W Triple
Rated Lumens	1710	2200	3200
Efficacy (LPW)	66	69	76
Rated Life	12,000	12,000	12,000
CRI 82	82	82	
Min. Starting Temp.	32°F	32°F	32°F

LUMINANCE DATA IN CANDELA/SQ. METER

Angle in Vertical	Average 0°
45°	20421
55°	12484
65°	6354
75°	4611
85°	2739

AVERAGE INITIAL FOOTCANDLESMultiple Units (Square Array)
Ceiling 80% Wall 50% Floor 20%**Assumptions:**

- Multiple Units (Square Array)
- Ceiling 80% Wall 50% Floor 20%
- 4 Fixtures evenly spaced in the center of the room.
- The room is square and has a width and length equal to twice the lamp spacing.
- The lumen depreciation factor is 0.8
- The dirt depreciation factor is 0.98.

42W Triple


SPACING	RCR1	RCR3	RCR7
7.0	18	15	10
8.0	14	11	8
9.0	11	9	6
10.0	9	7	5
11.0	7	6	4
12.0	6	5	3
13.0	5	4	3
14.0	4	4	3
15.0	4	3	2

LF6CFV32EB/6CFVCL with Clear Alzak Reflector and Clear Lens

Lamp: 1-F42TBX/835/A

Spacing Criteria: 1.2

Efficiency: 32.8%

**CANDLEPOWER
DISTRIBUTION****CANDLEPOWER
SUMMARY**

Angle	0°
0	525
5	526
10	539
15	548
20	542
25	507
30	455
35	388
40	316
45	242
50	175
55	120
60	74
65	45
70	35
75	20
80	9
85	4
90	0

COEFFICIENTS OF UTILIZATION Zonal Cavity Method

Room Cavity Ratio	% Effective Ceiling Cavity Reflectance															
	80%			70%			50%			30%			10%			
	20% Effective Floor Cavity Reflectance															
	% Wall Reflectance															
	70	50	30	10	70	50	30	10	50	30	10	50	30	10		
1	37	35	34	33	36	35	34	33	33	32	32	31	31	31	30	30
2	34	32	30	29	33	31	30	28	29	28	27	28	27	26	27	26
3	31	29	27	25	31	28	26	25	27	26	24	26	25	24	26	23
4	29	26	24	22	29	26	23	22	25	23	21	24	22	21	23	22
5	27	24	21	19	27	23	21	19	23	21	19	22	20	19	22	20
6	25	22	19	17	25	21	19	17	21	19	18	20	18	17	20	18
7	24	20	17	16	23	20	17	16	19	17	15	18	17	16	18	17
8	22	18	16	14	22	18	16	14	18	16	14	17	15	14	17	15
9	21	17	15	13	20	17	14	13	16	14	13	16	14	13	16	13
10	20	16	13	12	19	16	13	12	15	13	12	15	13	12	15	13

CFT632EB-STF602

Test No. 546

NOTESRefer to www.prescolite.com for additional photometric tests (IES Files).

When ordering a sloped ceiling adapter, specify the degree of slope in 5° increments, max. of 35°. For a more precise degree or wet ceiling applications, please contact factory. Sloped ceiling adapter and housing must be installed at the same time prior to finish ceiling installation.

Web: www.prescolite.com • Tech Support: (888) 777-4832

701 Millennium Blvd. Greenville, SC 29607 U.S.A. • Phone (864) 678-1000

Copyright ©2011 Prescolite, Inc., a division of Hubbell Lighting, Inc. All Rights Reserved

Specifications subject to change without notice • Printed in U.S.A. • IES C1017 • 9/6/11



Hubbell Lighting, Inc.

Contractor: Vaughn Industries

Job Name: OSU NRD Building B

Submitted by Lighting Systems of Columbus

Lighting Systems
of Columbus, Inc.**Job Name:**OHIO STATE UNIVERSITY NORTH RESIDENTIAL
DISTRICT TRANSFORMATION**Catalog Number:**

WMR-42F1-PC

Notes: LAMP INCLUDED

Type:**K1**

LSC14-37947

WM SERIESCOMPACT
WALL SCONCE

Cat. #		Approvals
Job	Type	

**APPLICATIONS**


- Accent wall sconces for mounting heights on 8-12 ft.

SPECIFICATIONS

- Shipped as full cutoff downlight
 - Units have an internal shield that when removed allows up/down distribution
- UV stabilized polycarbonate front is decorative yet rugged.
- Die cast housing provides rigid mounting and dissipates ballast/lamp heat.
- Silicone gasket seals out moisture and insects.
- Fluorescent units feature 120V photocontrol for dusk to dawn energy saving control.
- 70 watt pulse start units have Tri-Tap® ballast (120, 277, 347V) and are shipped less photocontrol. PBT-1 or PBT-234 may be field installed if photocontrol is desired.
- All units include lamp(s).

LISTINGS

- All units are UL 1598 listed for USA and Canada.

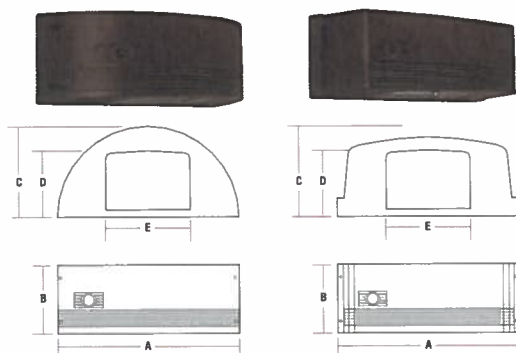

	A	B	C	D	E
WMR	14 ⁵ / ₈ "	5 ¹ / ₂ "	7 ⁵ / ₁₆ "	4 ¹³ / ₁₆ "	6 ¹ / ₁₆ "
	370 mm	140 mm	185 mm	121 mm	170 mm
WMS	14 ⁵ / ₈ "	5 ¹ / ₂ "	6 ⁵ / ₁₆ "	4 ¹³ / ₁₆ "	6 ¹ / ₁₆ "
	370 mm	140 mm	160 mm	121 mm	170 mm

ORDERING INFORMATION

Catalog Number ¹	Shape	Wattage	Voltage	Photocontrol	Weight
		Radius Style			lbs (kg)
WMR-213F1-PC	Radius	2X13 FLU	120	Yes	6.5 (2.9)
WMR-42F1-PC	Radius	42 FLU	120	Yes	6.0 (2.7)
WMR-70P6	Radius	70 PS	120, 277, 347	No	11.0 (5.0)
		Soft Square Style			
WMS-213F1-PC	Square	2X13 FLU	120	Yes	6.5 (2.9)
WMS-42F1-PC	Square	42 FLU	120	Yes	6.0 (2.7)
WMS-70P6	Square	70 PS	120, 277, 347	No	11.0 (5.0)

¹ All units have molded-in dark bronze finish and include lamps.

Due to our continued efforts to improve our products, product specifications are subject to change without notice.



Hubbell Outdoor Lighting • 701 Millennium Boulevard • Greenville, SC 29607 • PHONE: 864-678-1000

For more information visit our web site: www.hubbell-ltg.com

Date Submitted: Sept. 2, 2015

Distributor: C.E.D. Columbus, Oh 43207

Contractor: Vaughn Industries

Job Name: OSU NRDOT Building B

Submitted by Lighting Systems of Columbus

Lighting Systems
of Columbus, Inc.**Job Name:**OHIO STATE UNIVERSITY NORTH RESIDENTIAL
DISTRICT TRANSFORMATION**Catalog Number:**

WMR-42F1-PC

Notes: LAMP INCLUDED

Type:**K1**



LSC14-37947

**ANTRON ELECTRONICS CO. LTD.****CSS-UV42PS@277V**

Ballast Type	Electronic
Starting Method	Rapid Start
Lamp Connection	Series
Input Voltage	120-277
Input Frequency	60HZ
Status	Active
Safety Approval	UL/CUL

ELECTRICAL SPECIFICATIONS

Lamp Type	NO. of Lamps	Rated Lamp Watts	Min Start Temp (°F/°C)	Input Current (Amps)	Input Power (ANSI Watts)	Ballast Factor	MAX THD %	Power Factor	MAX Lamp Current Crest Factor	BEF
PLT26W	2	26	-22/-30	0.18	53	0.86	15	0.99	1.7	1.62
PLT42W	1	42	-22/-30	0.14	39	0.8	15	0.98	1.7	2.05
PLT32W	1	32	-22/-30	0.11	30	0.8	15	0.98	1.7	2.67
PLT26W	1	26	-22/-30	0.1	27	0.88	15	0.98	1.7	3.26
PLL40W	1	40	-22/-30	0.13	37	0.78	15	0.98	1.7	2.11
PLL39W	1	39	-22/-30	0.11	29	0.49	15	0.98	1.7	1.69
PLL36W	1	36	-22/-30	0.1	28	0.73	15	0.98	1.7	2.61
PLL24W	1	24	-22/-30	0.08	22	0.8	30	0.95	1.7	3.64
2D28W	1	28	-22/-30	0.1	28	0.67	15	0.98	1.7	2.39

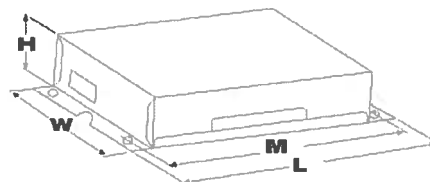Wiring Diagram**Enclosure****Standard Lead Length(inch/cm)**

	in.	cm.		in.	cm.
Black			Yellow/Blue		
White			Blue/White		
Blue			Brown		
Red			Orange		
Yellow			Orange/Black		
Gray			Black/White		

Over All(L)	Width(W)	Height(H)	Mounting(M)
13.3cm	6.3cm	3cm	12.3cm
5.36"	2.48	1.18	4.84




Revised 03/22/2004

Data is based upon tests performed by Antron Electronics in a controlled environment and representative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted

Contractor: Vaughn Industries

Job Name: OSU NRDT Building B

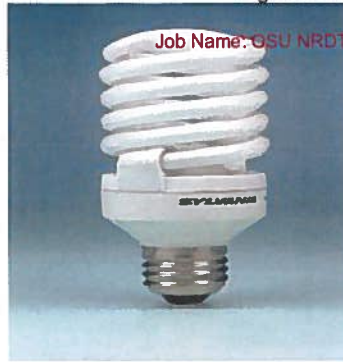

Product
Number:

Order Abbreviation: CF23EL/MICRO/835/RP3

General Description: 23W Compact Fluorescent
Micro Mini with integral 120V
ballast medium screw base
color temperature 3500K 82
CRI 10,000 hour life

Price: 7.94 USD

Quantity:

1
EA

10

Job: OSU - NRDT
Lamp for Types:
A40

Product Information	
Abbrev. With Packaging Info.	CF23ELMICRO835RP3 18/CS 3/SKU
Average Rated Life (hr)	10000
Base	Medium
Ball	MICROMINI

Product Details

Page 2 of 2



Footnotes

- Approximate initial lumens after 100 hours operation.
- Minimum starting temperature for DULUX EL lamps is 0° F, unless otherwise specified in product literature. .
- DULUX ELs meet CSA, FCC and UL requirements.
- Caution: DULUX EL units cannot be used on dimming circuits (unless the lamp is labeled dimmable), emergency exit fixtures or lights, electronic timers, photocells, lighted switches or any other switches that do not meet UL20 Sec. 7.6.15. In outdoor applications, use only in enclosed fixtures to avoid exposure to weather. Use only on 120V, 60 Hz circuits. Never disassemble or modify lamp. Install or remove unit from fixture by grasping plastic base. Best performance achieved when operated at 77degrees F (25 degrees C). 40 Watt lamp is designed for base down orientation only
- The life ratings of fluorescent lamps are based on 3 hr. burning cycles under specified conditions and with ballast meeting ANSI specifications. If burning cycle is increased, there will be a corresponding increase in the average hours life.
- Minimum starting temperature for DULUX EL lamps is 0 degrees F
- Rule of Thumb for Compact Fluorescent Lamps: Divide wattage of incandescent lamp by 4 to determine approximate wattage of compact fluorescent lamp that will provide similar light output.



2101 S High St. Columbus, Ohio 43207
Phone: 614/445-8871 Fax: 614/445-8871

Contractor: Vaughn Industries

www.sylvania.com

DULUX® T/E/IN ECOLOGIC® 4-Pin Amalgam Compact Fluorescent Lamps

Job: OSU - NRDT
Lamps for Types:

CF32DTEIN835ECO - TYPES A28,
A42, A45, F25
CF42DTEIN835ECO - K1

Key Features & Benefits

- Improved lumen output vs. non-amalgam triple tube lamps
 - Maintains 90% lumens from 40° to 140°F ambient
- Long 12,000 to 16,000 hour average rated life
- Fast run-up to full brightness
- ECOLOGIC passes Federal TCLP Test*
- RoHS compliant
- Operates electronic ballasts systems
 - Flicker-free starting and dimmable
 - Compatible with QUICKTRONIC® PROStart CF
- High luminous efficacy
- Rare earth tri-phosphor with 82 CRI
- Less power consumption than incandescent of comparable light output

SYLVANIA DULUX T/E/IN compact fluorescent lamps are ideal for use in a wide range of commercial and residential applications. They are designed to be operated on energy efficient electronic and dimming ballasts.

SYLVANIA DULUX T/E/IN lamps are long-life, energy-saving alternatives for incandescent lamps. Amalgam technology provides higher lumens over a much wider temperature range than non-amalgam lamps. The triple tube configuration of these lamps allows for single-lamp luminaire designs with improved efficacy and photometric performance.

ECOLOGIC® is a comprehensive program of OSRAM SYLVANIA focused on addressing environmental issues at all stages of lamp life.



* Regulations may vary. Check your local and state regulations.

Product Offering

Lamp	Wattage	CCT
CF18DT/E/IN	18	2700K, 3000K, 3500K, 4100K
CF26DT/E/IN	26	2700K, 3000K, 3500K, 4100K
CF32DT/E/IN	32	2700K, 3000K, 3500K, 4100K
CF42DT/E/IN	42	2700K, 3000K, 3500K, 4100K
CF57DT/E/IN	57	3000K, 3500K, 4100K

Application Information

Applications

- Recessed downlights
- Surface mounted luminaires
- Wall sconces

Application Notes

1. 4-pin lamps are designed for use with programmed rapid start ballasts. Not recommended for use with IS ballasts.
2. Minimum starting temperature depends on ballast.
3. Rule of thumb: to estimate the appropriate compact fluorescent lamp wattage, divide the incandescent wattage by 4.
4. Equipment manufacturers are advised to consult ANSI and IEC standards for the maximum allowable dimensions and temperature to insure compatibility with similar products.
5. QUICKTRONIC PROStart CF electronic ballasts are UCSA Certified and FCC 47CFR Part 18 Consumer Rated.
6. For horizontal operation, install lamp with etch facing down.
7. QUICKTRONIC ballasts feature QUICKSENSE® circuitry for end-of-life protection required by NEMA.

Contractor: Vaughn Industries

**Job: OSU - NRD
Lamp for Fixtures Types:
A28, A42, A45, F25, K1**



2101 S High St. Columbus, Ohio 43207
Phone: 614/445-8871 Fax: 614/445-8871

Ordering Information

Item Number	Ordering Abbreviation	NEMA Generic Designation	Base	Watts	Volts ¹	Amps ¹	Initial Lumens	Mean Lumens ²	CCT	CRI	Avg. Rated Life (hrs.) ³
20875	CF18DT/E/IN/827/ECO	CFTR18W/GX24q/27	GX24q-2	18	80	.210	1,200	1,032	2700K	82	12,000
20876	CF18DT/E/IN/830/ECO	CFTR18W/GX24q/30	GX24q-2	18	80	.210	1,200	1,032	3000K	82	12,000
20877	CF18DT/E/IN/835/ECO	CFTR18W/GX24q/35	GX24q-2	18	80	.210	1,200	1,032	3500K	82	12,000
20878	CF18DT/E/IN/841/ECO	CFTR18W/GX24q/41	GX24q-2	18	80	.210	1,200	1,032	4100K	82	12,000
20879	CF26DT/E/IN/827/ECO	CFTR26W/GX24q/27	GX24q-3	26	80	.300	1,800	1,548	2700K	82	16,000
20880	CF26DT/E/IN/830/ECO	CFTR26W/GX24q/30	GX24q-3	26	80	.300	1,800	1,548	3000K	82	16,000
20881	CF26DT/E/IN/835/ECO	CFTR26W/GX24q/35	GX24q-3	26	80	.300	1,800	1,548	3500K	82	16,000
20882	CF26DT/E/IN/841/ECO	CFTR26W/GX24q/41	GX24q-3	26	80	.300	1,800	1,548	4100K	82	16,000
20883	CF32DT/E/IN/827/ECO	CFTR32W/GX24q/27	GX24q-3	32	100	.320	2,400	2,064	2700K	82	16,000
20884	CF32DT/E/IN/830/ECO	CFTR32W/GX24q/30	GX24q-3	32	100	.320	2,400	2,064	3000K	82	16,000
20885	CF32DT/E/IN/835/ECO	CFTR32W/GX24q/35	GX24q-3	32	100	.320	2,400	2,064	3500K	82	16,000
20886	CF32DT/E/IN/841/ECO	CFTR32W/GX24q/41	GX24q-3	32	100	.320	2,400	2,064	4100K	82	16,000
20887	CF42DT/E/IN/827/ECO	CFTR42W/GX24q/27	GX24q-4	42	135	.320	3,200	2,752	2700K	82	16,000
20888	CF42DT/E/IN/830/ECO	CFTR42W/GX24q/30	GX24q-4	42	135	.320	3,200	2,752	3000K	82	16,000
20871	CF42DT/E/IN/835/ECO	CFTR42W/GX24q/35	GX24q-4	42	135	.320	3,200	2,752	3500K	82	16,000
20890	CF42DT/E/IN/841/ECO	CFTR42W/GX24q/41	GX24q-4	42	135	.320	3,200	2,752	4100K	82	16,000
20896	CF57DT/E/IN/830/ECO	CFTR57W/GX24q/30	GX24q-5	57	182	.320	4,300	3,698	3000K	82	12,000
20897	CF57DT/E/IN/835/ECO	CFTR57W/GX24q/35	GX24q-5	57	182	.320	4,300	3,698	3500K	82	12,000
20899	CF57DT/E/IN/841/ECO	CFTR57W/GX24q/41	GX24q-5	57	182	.320	4,300	3,698	4100K	82	12,000

Notes:

1. Measured on high-frequency ballast
2. Measured at 40% of rated life
3. Based on 3 hours per start. Number of operating hours when half have failed and half are still functional.

Ordering Guide

CF	26	DT	/	E	/	IN	/	835	/	ECO
Compact Fluorescent	Wattage 18, 26, 32, 42, 57	DULUX® Triple		Electronic Ballast		Amalgam		8 = 82 CRI 27=2700K CCT 30=3000K CCT 35=3500K CCT 41=4100K CCT		ECOLOGIC®

System Comparison

Compact Fluorescent vs. Incandescent


Lamp Type	Rated Lamp Life (hrs.)	System Lumens	System Wattage	System LPW	Energy Savings*
100W Incandescent	750	1,710	100	17	—
DULUX T/E/IN 26W w/QUICKTRONIC® CF	18,000	1,800	28	64	\$115
150W Incandescent	750	2,740	150	18.5	—
DULUX T/E/IN 42W w/QUICKTRONIC CF	16,000	3,200	46	70	\$66

* Based on an energy cost of \$0.10/kWh over the life of the lamp.

Contractor: Vaughn Industries


Lamp Dimensions

	(A) MOL [in. (mm)]	(B) Max. Base Face to Top of Lamp [in. (mm)]	(C) Max. Base Width [in. (mm)]	(D) Guide Post Length [in. (mm)]
CF18DT/E/IN	4.37 (111)	3.74 (95)	1.90 (48)	0.62 (16)
CF26DT/E/IN	4.96 (126)	4.33 (110)	1.90 (48)	0.62 (16)
CF32DT/E/IN	5.59 (142)	4.96 (126)	1.90 (48)	0.62 (16)
CF42DT/E/IN	6.42 (163)	5.78 (147)	1.90 (48)	0.62 (16)
CF57DT/E/IN	7.76 (197)	7.13 (181)	1.90 (48)	0.62 (16)




Technical Information

90% Lumen Performance Range
DULUX T/E/IN vs. Non-Amalgam Lamps

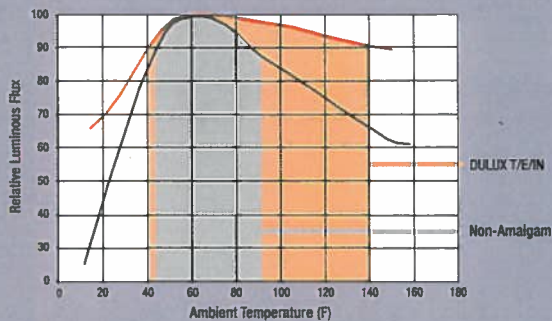

Lumen Run-Up Comparison

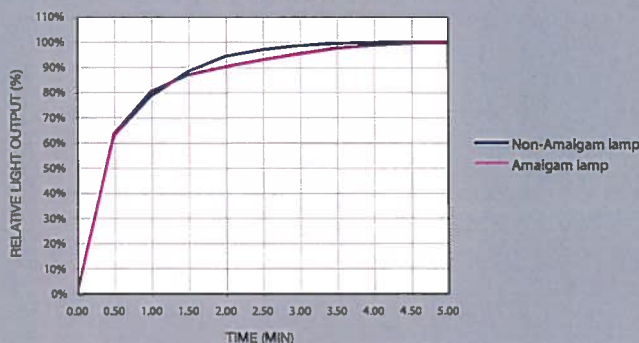

Related Literature

For maximum energy savings consider pairing with the following electronic ballast:

Ballast Technology Applications & Specification Guide (Literature Code: ECS-Electronic2009)

QUICK 60+® System Warranty (Literature Code: ECS140)

SYLVANIA, ECOLOGIC, ECO, QUICK 60+ and QUICKSENSE are registered trademarks of OSRAM SYLVANIA Inc.
SEE THE WORLD IN A NEW LIGHT is a registered trademark of OSRAM SYLVANIA Inc.
QUICKTRONIC and DULUX are registered trademarks of OSRAM GmbH.
Specifications subject to change without notice.

Sample Specification

Lamp(s) shall be (a) DULUX® (CF18DT/E/IN, CF26DT/E/IN, CF32DT/E/IN, CF42DT/E/IN or CF57DT/E/IN) ECOLOGIC® lamps and pass existing Federal TCLP limits. Lamp(s) shall have an average rated life of 12,000 to 16,000 hours, a correlated color temperature of (2700K, 3000K, 3500K or 4100K), and a CRI of 82. Lamps shall have a (GX24q-2, -3, -4 or -5) plug-in, 4-pin base and be suitable for use on electronic and dimming ballasts. Lamps shall be operated by QUICKTRONIC® ballasts. Both lamps and ballasts are covered by the QUICK 60+® system warranty.

United States

OSRAM SYLVANIA

100 Endicott Street
Danvers, MA 01923
1-800-LIGHTBULB

Trade

Phone: 800-255-5042
Fax: 800-255-5043

National Accounts

Phone: 800-562-4671
Fax: 800-562-4674

OEM/Special Markets

Phone: 800-762-7191
Fax: 800-762-7192

Retail

Phone: 800-842-7010
Fax: 800-842-7011

SYLVANIA Lighting Services

Phone: 800-323-0572
Fax: 800-537-0784

Display/Optic

Phone: 888-677-2627
Fax: 855-543-1043

Canada

OSRAM SYLVANIA LTD.

2001 Drew Road
Mississauga, ON L5S 1S4
1-800-LIGHTBULB

Trade

Phone: 800-263-2852
Fax: 800-667-6772

OEM/Special Markets/Display/Optic

Phone: 800-265-2852
Fax: 800-667-6772

Retail

Phone: 800-720-2852
Fax: 800-667-6772

SYLVANIA Lighting Services

Phone: 800-663-4268
Fax: 866-239-1278

Mexico

OSRAM MEXICO

Tultitlan/Edo de Mexico
Phone: 011-52-55-58-99-18-50

ENCELIUM Technologies

United States

Phone: 201-928-2400
Fax: 201-928-4028

Canada

Phone: 905-731-7678
Fax: 905-731-1401

www.sylvania.com



Contractor: Vaughn Industries

Job Name: OSU NRDT Building B

www.sylvania.com

OCTRON® 800 ECOLOGIC® Fluorescent Lamps

**Job: OSU NRDT
Lamp for Types:**
F017/835/ECO - TYPES: B15, D2
F025/835/ECO - TYPE D3
F032/835/ECO - TYPES A7, A15,
B2, B5, B16, B17, B24, B40, C2, C8, D4, D5

Key Features & Benefits

- Passes Federal TCLP test*
- Energy efficient T8 lamp
- Made in the USA
- Lead free
- RoHS compliant
- Compatible with QUICKTRONIC® electronic ballasts
- QUICK 60+® System Warranty

ECOLOGIC® is a comprehensive program of OSRAM SYLVANIA focused on addressing environmental issues at all stages of lamp life.

* Regulations may vary. Check your local and state regulations.



This light source meets restrictions on hazardous substances.



OCTRON 800 ECOLOGIC T8 lamps offer a high quality solution for general purpose fluorescent lighting applications where color is important. These lamps are available in a wide range of color temperatures: 3000K, 3500K, 4100K and 5000K that feature improved color rendering and lumen maintenance when compared to 700 series lamps. When paired with QUICKTRONIC electronic ballasts, these systems are a good alternative to T12 fluorescent systems and are covered by the comprehensive QUICK 60+ system warranty.

Product Offering

Ordering Abbreviation	Wattage	Lumens	CRI
F017/800/ECO	17	1350	82
F025/800/ECO	25	2150	82
F032/800/ECO	32	2950	85
F040/800/ECO	40	3650	82
F096/800/ECO	96	5900	82

Application Information

Applications

- Cove
- Recessed troffer
- Strip light fixture
- Valance

Application Notes

1. Lamps starting down to -20°F (dependent on ballast)
2. Operation below 50°F may affect lumen output or lamp operation.
3. For cold temperature applications, use in enclosed fixture or use tube to maximize lamp performance.
4. For rapid start operation, check with ballast manufacturer for ground plane requirement.
5. For maximum energy savings, operate on electronic instant start ballast.



2101 S High St. Columbus, Ohio 43207
Phone: 614/445-8871 Fax: 614/445-8871

SEE THE WORLD IN A NEW LIGHT



FL085R1 11/10

Date Submitted: Sept. 2, 2015

Distributor: C.E.D. Columbus, Oh 43207

Contractor: Vaughn Industries

Ordering Information

Job: OSU NRDT
Lamp for Types:

A7, A15, B2, B5, B15,
B16, B17, B24, B40,
B40, C2, C8, D2, D3,
D4, D5

Item Number	Ordering Abbreviation	Nominal Length	Initial Lumens	Mean Lumens ¹	Instant Start		Rated Life		CCT	CRI
					3 hrs/ start	12 hrs/ start	3 hrs/ start	12 hrs/ start		
22135	F017/830/ECO	24	1,350	1,269	24,000	28,000	30,000	36,000	3000K	82
22136	F017/835/ECO	24	1,350	1,269	24,000	28,000	30,000	36,000	3500K	82
22137	F017/841/ECO	24	1,350	1,269	24,000	28,000	30,000	36,000	4100K	82
22138	F025/830/ECO	36	2,150	2,021	24,000	28,000	30,000	36,000	3000K	82
22139	F025/835/ECO	36	2,150	2,021	24,000	28,000	30,000	36,000	3500K	82
22140	F025/841/ECO	36	2,150	2,021	24,000	28,000	30,000	36,000	4100K	82
21777	F032/830/ECO	48	2,950	2,773	24,000	28,000	30,000	36,000	3000K	85
21779	F032/835/ECO	48	2,950	2,773	24,000	28,000	30,000	36,000	3500K	85
21781	F032/841/ECO	48	2,950	2,773	24,000	28,000	30,000	36,000	4100K	85
22143	F032/850/ECO	48	2,950	2,773	24,000	28,000	30,000	36,000	5000K	80
22144	F040/830/ECO	60	3,650	3,431	24,000	28,000	30,000	36,000	3000K	82
22145	F040/835/ECO	60	3,650	3,431	24,000	28,000	30,000	36,000	3500K	82
22146	F040/841/ECO	60	3,650	3,431	24,000	28,000	30,000	36,000	4100K	82
22147	F096/830/ECO	96	5,900	5,428	18,000	24,000			3000K	82
22148	F096/835/ECO	96	5,900	5,428	18,000	24,000			3500K	82
22149	F096/841/ECO	96	5,900	5,428	18,000	24,000			4100K	82
22173	F096/850/ECO	96	5,900	5,428	18,000	24,000			5000K	82


1. Mean lumens measured at 40% of rated life.

Ordering Guide

FO	32	/	8	35	/	ECO
Fluorescent	Wattage:		8 = 80-85 CRI	30 = 3000K CCT		ECOLOGIC
OCTRON	17, 25, 32, 40 or 96 watts			35 = 3500K CCT		
				41 = 4100K CCT		
				50 = 5000K CCT		

Technical Information

Typical Fluorescent Lamp Mortality

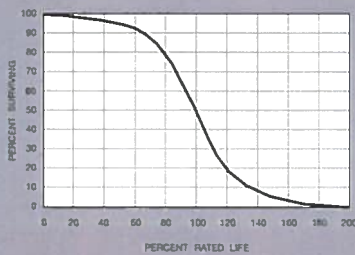

Related Literature

For maximum energy savings consider pairing with the following electronic ballast:

Ballast Technology Applications & Specification Guide (Literature Code: ECS-Electronic2009)

QUICK 60+® System Warranty (Literature Code: ECS140)



2101 S High St. Columbus, Ohio 43207
Phone: 614/445-8871 Fax: 614/445-8871

SYLVANIA is a registered trademark of OSRAM SYLVANIA Inc.
SEE THE WORLD IN A NEW LIGHT is a registered trademark of OSRAM SYLVANIA Inc.
OCTRON, ECOLOGIC and QUICK 60+ are registered trademarks of OSRAM SYLVANIA Inc.
QUICKTRONIC is a registered trademark of OSRAM GmbH.

FL085R1 11/10

Date Submitted: Sept. 2, 2015

Sample Specification

Lamp(s) shall be an OCTRON® ECOLOGIC® lamp(s) (F017/ECO, F025/ECO, F032/ECO, F040/ECO and F096/ECO) having medium bi-pin bases. Lamp(s) shall be designed to pass the Federal TCLP test in force at the time of manufacture. Lamp(s) shall have a correlated color temperature of (3000K, 3500K, 4100K or 5000K) and a CRI of (80, 82 or 85). The OCTRON lamp(s) shall be operated on dedicated QUICKTRONIC® ballast(s) with complete system warranty from one manufacturer covering lamp(s) and ballast(s).

United States
OSRAM SYLVANIA
100 Endicott Street
Danvers, MA 01923

Trade
Phone: 1-800-255-5042
Fax: 1-800-255-5043

National Accounts
Phone: 1-800-562-4671
Fax: 1-800-562-4674

OEM/Special Markets
Phone: 1-800-762-7191
Fax: 1-800-762-7192

Display/Optic
Phone: 1-888-677-2627
Fax: 1-800-762-7192

Canada
OSRAM SYLVANIA LTD.
2001 Drew Road
Mississauga, ON L5S 1S4

Trade
Phone: 1-800-263-2852
Fax: 1-800-667-6772

OEM/Special Markets/Display/Optic
Phone: 1-800-265-2852
Fax: 1-800-667-6772

www.sylvania.com

Distributor: C.E.D. Columbus, Oh 43207

Contractor: Vaughn Industries

www.sylvania.com

PENTRON® ECOLOGIC® T5 Linear Fluorescent Lamps

Job: OSU NRD T
Lamp for Types: A17, A18, A48, B25
FP28/835/ECO

Key Features & Benefits

- High Performance T5 lamps
 - Up to 104 LPW
 - 95% lumen maintenance
 - Peak lumen output at 35°C (95°F)
 - Dimmable
 - Ideal for occupancy sensor applications
- Up to 36,000 hours lamp life
- TCLP and RoHS compliant
- Made in the USA
- Lead free glass
- Greater luminaire design flexibility
- Nominal 2', 3', 4', and 5'
- QUICK 60+ system warranty offered when paired with QUICKTRONIC T5 electronic ballast

ECOLOGIC® is a comprehensive program of OSRAM SYLVANIA focused on addressing environmental issues at all stages of lamp life.

* Regulations may vary. Check your local and state regulations.



PENTRON ECOLOGIC T5 lamps offer a high quality lighting solution for linear fluorescent applications where luminaire design flexibility is important. These lamps are available in 2, 3, 4 and 5-foot lengths and offer a wide range of color temperatures: 2700K, 3000K, 3500K, 4100K, 5000K and 6500K. When paired with a QUICKTRONIC® T5 ballast, these systems are covered by the comprehensive QUICK 60+® system warranty.

Product Offering

Ordering Abbreviation	Watts	CCT
FP14/800/ECO	14	3000K, 3500K, 4100K, 6500K
FP21/800/ECO	21	3000K, 3500K, 4100K, 6500K
FP28/800/ECO	28	2700K, 3000K, 3500K, 4100K, 5000K, 6500K
FP35/800/ECO	35	3000K, 3500K, 4100K

Application Information

Applications

- Cove and valance
- Direct / indirect luminaires
- Facade luminaires
- Low profile surface mount
- Shallow recessed fixtures
- Showcase
- Signage

Application Notes

1. PENTRON ECO lamps are about 2" shorter than T8 & T12 Bi-Pin lamps.
2. Miniature Bi-Pin bases will not install into T8 & T12 sockets.
3. Miniature Bi-Pin bases require UL Listed 600 Volt rated sockets.
4. Requires high frequency programmed rapid start electronic ballasts for T5s equipped with end-of-life sensing circuit.
5. PENTRON ECO operates at same current for uniform color and brightness between nominal 2', 3', 4', and 5' lengths.
6. Apply thermal factor in calculations for use in exterior or unheated applications.



2101 S High St. Columbus, Ohio 43207
Phone: 614/445-8871 Fax: 614/445-8871

SEE THE WORLD IN A NEW LIGHT



FL091R4 9-12

Date Submitted: Sept. 2, 2015

Distributor: C.E.D. Columbus, Oh 43207

Electronic instant start ballast.

Contractor: Vaughn Industries

Job Name: OSU NRDT Building B

Job: OSU NRDT
Lamp for Types:

A17, A18, A48, B25



Ordering Information

Item Number	Ordering Abbreviation	Base	Watt	Nominal Length (in)	Initial Lumens @ 25°C	Mean Lumens @ 25°C	Initial Lumens @ 35°C	Mean Lumens @ 35°C	Programmed 3 hrs/start	Rapid Start 12 hrs/start	CCT	CRI
20907	FP14/830/ECO	Miniature Bi-Pin	14	24	1,200	1,140	1,350	1,285	25,000	28,000	3000K	85
20908	FP14/835/ECO	Miniature Bi-Pin	14	24	1,200	1,140	1,350	1,285	25,000	28,000	3500K	85
20914	FP14/841/ECO	Miniature Bi-Pin	14	24	1,200	1,140	1,350	1,285	25,000	28,000	4100K	85
20988	FP14/865/ECO	Miniature Bi-Pin	14	24	1,100	1,045	1,300	1,235	25,000	28,000	6500K	85
20919	FP21/830/ECO	Miniature Bi-Pin	21	36	1,900	1,805	2,100	1,995	25,000	28,000	3000K	85
20921	FP21/835/ECO	Miniature Bi-Pin	21	36	1,900	1,805	2,100	1,995	25,000	28,000	3500K	85
20924	FP21/841/ECO	Miniature Bi-Pin	21	36	1,900	1,805	2,100	1,995	25,000	28,000	4100K	85
20989	FP21/865/ECO	Miniature Bi-Pin	21	36	1,750	1,665	2,000	1,900	25,000	28,000	6500K	85
20975	FP28/827/ECO	Miniature Bi-Pin	28	48	2,600	2,470	2,900	2,755	30,000	36,000	2700K	85
20868	FP28/830/ECO	Miniature Bi-Pin	28	48	2,600	2,470	2,900	2,755	30,000	36,000	3000K	85
20901	FP28/835/ECO	Miniature Bi-Pin	28	48	2,600	2,470	2,900	2,755	30,000	36,000	3500K	85
20902	FP28/841/ECO	Miniature Bi-Pin	28	48	2,600	2,470	2,900	2,755	30,000	36,000	4100K	85
22203	FP28/850/ECO	Miniature Bi-Pin	28	48	2,545	2,420	2,840	2,700	30,000	36,000	5000K	85
20990	FP28/865/ECO	Miniature Bi-Pin	28	48	2,400	2,280	2,750	2,615	30,000	36,000	6500K	85
20925	FP35/830/ECO	Miniature Bi-Pin	35	60	3,300	3,135	3,650	3,470	25,000	28,000	3000K	85
20926	FP35/835/ECO	Miniature Bi-Pin	35	60	3,300	3,135	3,650	3,470	25,000	28,000	3500K	85
20927	FP35/841/ECO	Miniature Bi-Pin	35	60	3,300	3,135	3,650	3,470	25,000	28,000	4100K	85

Ordering Guide

FP	14	/	8	30	/	ECO®
Fluorescent PENTRON® T5	Wattage: 14, 21, 28 or 35 watts		8 = 85 CRI	27 = 2700K CCT, 30 = 3000K CCT 35 = 3500K CCT, 41 = 4100K CCT 50 = 5000K CCT, 65 = 6500K CCT		ECOLOGIC®




2101 S High St. Columbus, Ohio 43207
Phone: 614/445-8871 Fax: 614/445-8871

Contractor: Vaughn Industries


Technical Information

Dimensions

Ordering Abbreviation	(A) Max. Overall Length mm (in.)	(B) Base Face to Opposite Pin mm (in.)	(C) Base Face to Base Face mm (in.)	(D) Max. Outside Diameter mm (in.)
FP14	563.2 (22.17)	553.7 - 556.1 (21.80 - 21.89)	547.1 - 549.0 (21.54 - 21.61)	17.0 (0.67)
FP21	863.2 (33.89)	853.7 - 856.1 (33.61 - 33.70)	847.1 - 849.0 (33.35 - 33.43)	17.0 (0.67)
FP28	1163.2 (45.80)	1153.7 - 1156.1 (45.42 - 45.52)	1147.1 - 1149.0 (45.16 - 45.24)	17.0 (0.67)
FP35	1463.2 (57.61)	1453.7 - 1456.1 (57.23 - 57.33)	1447.1 - 1449.0 (56.97 - 57.05)	17.0 (0.67)




Lumen Output vs. Temperature T8/T5

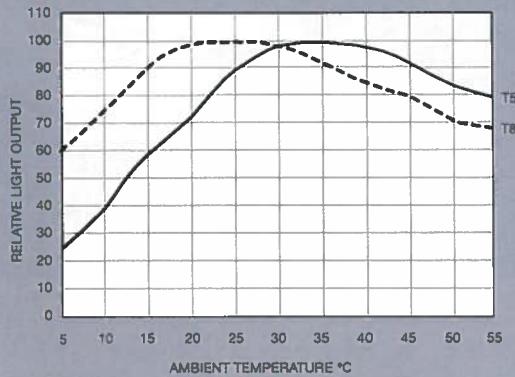

Fluorescent Lamp Lumen Maintenance



Typical Fluorescent Lamp Mortality

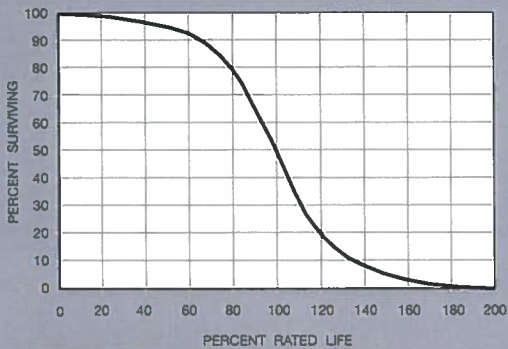

Related Literature

For optimum system performance and warranty pair with QUICKTRONIC® electronic ballast systems:

Ballast Technology Applications & Specification Guide (Literature Code: ECS-Electronic2009)

QUICK 60+® System Warranty (Literature Code: ECS140)

Contractor: Vaughn Industries

www.sylvania.com

QUICKTRONIC® PROStart® T5 Universal Voltage Systems

Job: OSU - NRDT
Ballast for Types
A17, A18, A48, B25



Type CC
Programmed Rapid Start
Normal Ballast Factor

High Efficiency Series

QHE T5 PSN

Lamp / Ballast Guide

28W T5 – PENTRON® lamps
1 or 2 lamp QHE2x28T5/UNV PSN

Primary Lamp Type:
FP28

Also operates:
FP14, FP21, FP35

Two lamp fixed output model can be
wired for one lamp operation.

Key System Features

- High Efficiency Systems over 90% efficient
- Universal voltage (120-277V)
- Low-profile (0.87" High)
- 1.0 Ballast factor (see table)
- QUICKSENSE® ballast technology (end-of-lamp-life sensing)
- PROStart programmed rapid start
- Min. starting temperature
 - -20°F (-29°C)
- Operates at >42 kHz to reduce potential interference with infrared control systems
- Meet the most demanding utility rebate standards
- UL Type CC rated
- RoHS compliant
- Lead-free solder, printed circuit board and manufacturing process



Application Information

SYLVANIA QUICKTRONIC PS ballasts are ideally suited for:

- Commercial
- Retail
- Hospitality
- Institutional
- New construction
- Direct lighting
- Indirect lighting
- Surface mount
- Cove lighting

SYLVANIA QUICKTRONIC High Efficiency (QHE) PROStart T5 Universal Voltage electronic ballasts operate PENTRON T5 lamps saving >2 watts as compared to standard T5 ballasts.

QUICKTRONIC PROStart T5 ballasts feature programmed rapid start lamp starting and operation which provides optimum conditions to deliver up to 100,000 switching cycles for use on occupancy sensors and building control systems.

QUICKTRONIC PROStart T5 ballasts are RoHS compliant and feature lead-free solder, printed circuit boards and manufacturing process.

Setting the standard for quality, QUICKTRONIC PROStart T5 systems are covered by the QUICK 60+® warranty, the first and most comprehensive system warranty in the industry.

System Information


SYLVANIA QUICKTRONIC PS T5 High Efficiency (QHE) System advantages:

- Operate from 120V through 277V
 - Eliminates "wrong voltage" errors
 - Reduces inventory by 50%
- Utilizes Programmed Rapid Start operation for:
 - Highest System Efficacy
 - Longer Life
 - Over 100,000 switching cycles for occupancy sensor and building control systems applications

QUICKSENSE ballast technology helps to protect against overheated bases and sockets, as well as cracking of the glass wall, and uses dynamic end-of-lamp-life sensing to avoid false shutdowns caused by some static sensing methods. QUICKSENSE ballast technology will auto reset when the end-of-life lamps are replaced with new ones.



System Type (2-lamp)	Input Power (W)	Initial System Lumens	Initial System Efficacy (LPW)	Mean System Lumens	Relative Mean Light Output	Energy Savings (%)
2-F40T12 ES Mag. Ballast	86	5795	67	4925	100%	Baseline
2-F032/700 QTP2x32T8/UNV ISN-SC	59	4930	84	4435	90%	31%
2-FP28T5/800 QTP2x28T5/UNV PSN	65	5800	89	5395	111%	24%
2-FP28T5/800 QHE2x28T5/UNV PSN	63	5800	92	5395	111%	27%

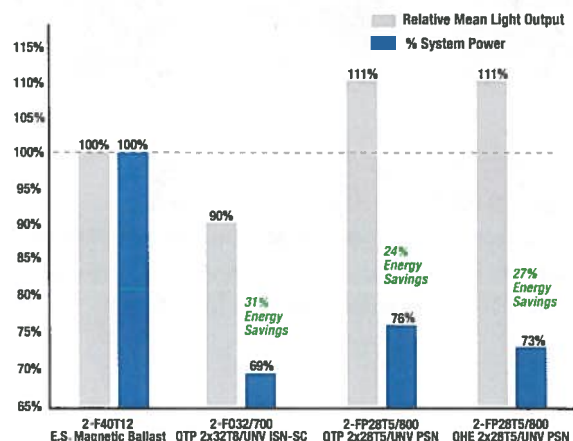

ECS421 - 6-13

Date Submitted: Sept. 2, 2015

SEE THE WORLD IN A NEW LIGHT



Distributor: C.E.D. Columbus, Oh 43207

Contractor: Vaughn Industries

Job Name: OSU NRDT Building B

Job: OSU - NRDT
Ballast for Types: A17, A18, A48, B25

High Efficiency Type CC & Universal Voltage (120-277V)





Item Number	OSRAM SYLVANIA Description	Input Current (AMPS)	Lamp Type	Rated Lumens (lm)	No. of Lamps	Ballast Factor (BF)	System Lumens	Mean Lumens	Input Power (W) 120V 277V	System Efficacy (lm/W)	BEF ²
51473 ○ 20-pack (without leads) (51472) ○ 10-pack (with leads)	QHE2x28T5/UNV PSN	0.55/0.23	FP28T5	2900	2	1.00	5800	5395	63 62	94	1.61
		0.68/0.29	FP35T5	3650	2	0.99	7225	6720	80 78	93	1.27
		0.39/0.18	FP21T5	2100	2	1.01	4240	3945	47 46	92	2.20
		0.27/0.13	FP14T5	1350	2	1.03	2780	2585	32 32	87	3.22
		0.27/0.12	FP28T5	2900	1	1.00	2900	2695	33 32	91	3.13
		0.34/0.15	FP35T5	3650	1	1.02	3725	3460	41 40	93	2.55
		0.21/0.10	FP21T5	2100	1	1.04	2185	2030	25 24	91	4.33
		0.15/0.07	FP14T5	1350	1	1.03	1390	1295	17 17	82	6.06

¹ At 35°C lamp ambient temperature

² Ballast Efficiency Factor (BEF) shown = (Ballast Factor x 100) divided by Input Power (Note: calculation based on lowest wattage value)

³ System Efficacy calculation based on lowest input power value.

○ Preliminary specifications. Please contact OSRAM SYLVANIA for additional information.

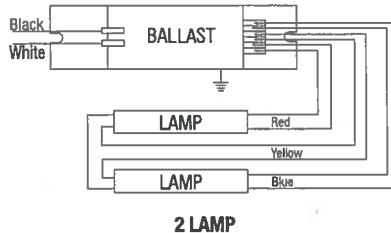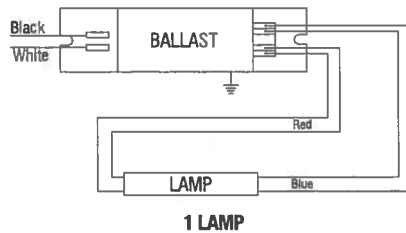

Dimensions:

Model QHE2x28T5/UNV PSN enclosure size:

Overall: 14.17" L x 1.18" W x 0.87" H (360mm L x 30mm W x 22mm H)

Mounting: 13.74" (349mm)

Wiring:

51473: Push-in connectors


51472: Push-in connectors with leads

Use 18AWG solid copper wire only

Product Weight:

51473: 0.68 lb (0.30kg) each (approx.)

51472: 0.88 lb (0.40kg) each (approx.)

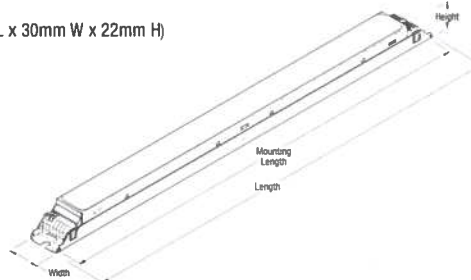

Item Number 51473 QHE 2 x 28T5 / UNV PSN Starting/Ballast Factor
QUICKTRONIC High Efficiency _____ Line Voltage (120-277V)
Number of Lamps (2) _____ Primary Lamp Wattage

Normal Ballast Factor

T5 PROStart®

High Efficiency

Performance Guide

Data based upon SYLVANIA PENTRON® lamps shown. QUICKTRONIC® ballasts are also compatible with other lamp manufacturers equivalent lamp types that meet ANSI specifications.

Specifications⁴

Starting Method: Programmed

Rapid Start

Ballast Factor: 1.00 (see table)

Circuit Type: Series

Lamp Frequency: >42 kHz

Lamp CCF: Less than 1.6

Starting Temp: -20°F (-29°C)⁵

Input Frequency: 50/60 Hz

Low THD: <10%

Power Factor: >98%

Voltage Range: ±10% of 120-277V
rated line (108-305V)

UL Type CC rated

UL Listed Class P, Type 1, Outdoor

CSA Certified

70°C Max Case Temperature

FCC 47CFR Part 18 Non-Consumer

Class A Sound Rating

ANSI C62.41 Cat. A Transient Protection

QUICKSENSE Dynamic End-of-

Lamp-Life Sensing

Remote Mounting (Max. wire length

from ballast case to lampholder):

up to 18 feet. Remote red leads up

to 18 feet. Keep blue leads <10 feet.

RoHS Compliant⁶

⁴ Data based on PENTRON 28W lamp types for primary ballast application.

⁵ Operation below 50°F (10°C) may affect light output or lamp operation – see "Low Temp. Starting" definition.

⁶ Complies with European Union Restriction of Hazardous Substances Directive.

System Life / Warranty

QUICKTRONIC products are covered by the QUICK 60+® warranty, a comprehensive lamp and ballast system warranty. For additional details, refer to the QUICK 60+ warranty bulletin.

OSRAM SYLVANIA
National Customer
Service and Sales Center
1-800-LIGHTBULB
(1-800-544-4828)
www.sylvania.com

Specifications subject to change without notice.

QHE T5 PSN

©2013 OSRAM SYLVANIA

Contractor: Vaughn Industries

Job Name: OSU NRDT Building B

Job: OSU NRDT A7, A15, B2, B5, B15,
Ballast for Types: B16, B17, B24, B40, C2,
C8, D2, D3, D4, D5

www.sylvania.com

QUICKTRONIC® PROStart® T8 Parallel Operation Systems

NEMA
Premium

Type CC, Lamp Striation Control
Parallel Operation
Normal Ballast Factor

High Efficiency Series

QHE T8 PSN

Lamp / Ballast Guide

Primary Systems

- 32W T8 - OCTRON® lamps
- 1-lamp QHE 1x32T8/UNV PSN-MC
- 2-lamp QHE 2x32T8/UNV PSN-MC
- 3-lamp QHE 3x32T8/UNV PSN-SC
- 4-lamp QHE 4x32T8/UNV PSN-SC

Also operates:

F030/SS, F028/SS, F025/SS, FB032,
FB031, FB030/SS, FB029/SS, F025,
F017, FB024 & FB016


F40T8 operation:

1 lamp on 2L ballast; 2 lamps on 3L
ballast; 3 lamps on 4L ballast

SYLVANIA QUICKTRONIC High Efficiency PROStart programmed rapid start electronic T8 ballast family offers several major advantages:

- **High Efficiency:** Operate 32W linear and U-bend equivalent T8 lamps, saving >2 watts as compared to standard T8 programmed rapid start ballasts.
- **Parallel Circuitry:** keeps remaining lamps lit if one or more go out.
- **Lamp Striation Control (LSC):** T8 energy saving lamps should be operated above 60°F, but under certain conditions, the lamps may striate. LSC circuitry will minimize or eliminate this condition in most applications. (Please consult lamp manufacturers for additional details.)

- **Micro-Can Enclosure:** the 1 & 2-lamp models are in the micro-can enclosure. This allows the ballast to fit in very small profile fixtures where standard can T8 ballasts are too large.
- **NEMA Premium Electronic Ballast Program and RoHS compliant:** These ballasts feature lead-free solder, printed circuit boards and manufacturing. The NEMA Premium Electronic Ballast Program promotes the use of

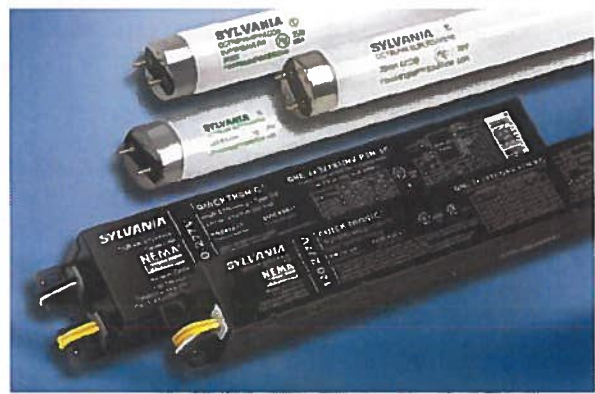

Key System Features

- High Efficiency Systems over 90% efficient
- NEMA Premium Electronic Ballast Program compliant
- PROStart programmed rapid start
- Extends lamp life
- **Parallel operation** (one lamp out, remaining lamps stay lit)
- Normal ballast factor: 0.88
- UL Type CC
- LSC (Lamp Striation Control)
- Universal input voltage (120-277V)
- Minimum starting temperature:
 - -20°F (-29°C) for T8 lamps
 - 60°F (16°C) for energy saving T8 lamps
- RoHS compliant
- Lead-free solder, printed circuit board and manufacturing process



Application Information

SYLVANIA QUICKTRONIC PROStart T8 ballasts

are ideally suited for:

- Any application where extended lamp life is required to reduce maintenance costs
- Occupancy sensors
- Energy retrofits
- Building control systems

System Information

SYLVANIA QUICKTRONIC High Efficiency (QHE) System advantages:

- Operate from 120V through 277V
 - Eliminates "wrong voltage" errors
 - Reduces inventory by 50%
- Utilize Programmed Rapid Start operation for
 - Longer lamp life
 - Over 100,000 switching cycles for occupancy sensor and building control systems
- Operate at >42 kHz to reduce potential interference with infrared control systems


high efficiency T8 electronic ballasts by meeting or exceeding the Ballast Efficiency Factors, (BEF) established by the CEE, (Consortium for Energy Efficiency). For additional details on this program go to: www.cee1.org or www.nema.org

• **Longer lamp life:** PROStart technology extends lamp life compared to instant start models for long or short switching cycles, which is ideal for reducing maintenance costs or for saving energy

when using occupancy sensors.

- **UL Type CC compliant:** ballasts utilize a micro-controller based circuit to reduce arcing caused by loose connections or improper lamp pin-to-socket connections.
- **QUICK 60+® System Warranty:** Setting the standard for quality the system is covered by the first and most comprehensive warranty in the industry.

Lamp & Ballast Type	Input Power (W)	Initial Lumens	Initial LPW	Mean System Lumens	Relative Mean Light Output	% Energy Savings
3-F032/700 QTP3x32T8/UNV ISN-SC	86	6865	80	6310	100%	0%
3-F032/800/XP® QHE3x32T8/UNV PSN-SC	82	7920	97	7445	118%	5%
3-F028/SS QHE3x32T8/UNV PSN-SC	72	7195	100	6760	107%	16%
3-F025/SS QHE3x32T8/UNV PSN-SC	66	6535	99	6140	97%	23%

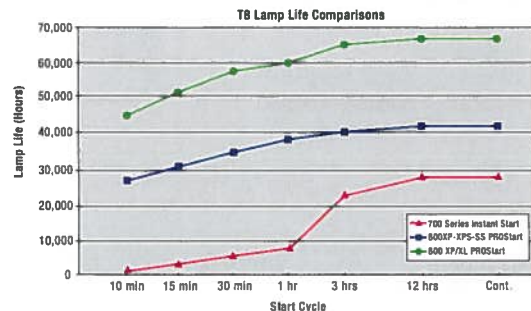

ECS413 - 6-13

Date Submitted: Sept. 2, 2015

SEE THE WORLD IN A NEW LIGHT



Distributor: C.E.D. Columbus, Oh 43207

Contractor: Vaughn Industries

Job Name: OSU NRD Building B

Job: OSU NRD Ballast for Types:

Normal Ballast Factor

T8 PROStart®

High Efficiency

Performance Guide

Data based upon SYLVANIA OCTRON® lamps shown. QUICKTRONIC® QHE PROStart ballasts are also compatible with other lamp manufacturers equivalent lamp types that meet ANSI specifications.

QHE PROStart ballasts will operate F32 (and the SUPERSAVER® & U-Bend equivalent) T8 lamps. Complete performance data is available in the QUICKSYSTEMS section of the SYLVANIA Ballast Technology & Specification Guide.

Specifications

Data based on F32T8

Starting Method: Programmed Rapid Start
Ballast Factor: 0.88
Circuit Type: Parallel
Lamp Frequency: >42 kHz
Lamp CCF: Less than 1.7
Starting Temp.:
-20°F (-29°C) for OCTRON T8 lamps;
60°F (16°C) for SUPERSAVER® T8 lamps
Input Frequency: 50/60 Hz
Low THD: <10%
Power Factor: >98%
Voltage Range: ±10% of 120-277V rated line (108-305V)

UL Listed Class P, Type 1 Outdoor
UL Type CC Rated
Lamp Striation Control (LSC)
CSA Certified (where applicable)
70°C Max. Case Temperature
FCC 47 CFR Part 18 Non-Consumer
Class A Sound Rating
NEMA Premium Electronic Ballast
Program compliant
RoHS compliant*
ANSI C62.41 Cat. A Transient Protection
GFCI & emergency ballast compatible
Remote Mounting (Max wire length from ballast case to lampholder):
• 20 ft: full wattage T8s
• 10 ft: energy saving T8s
• 4 ft: 25W energy saving T8s

3 Operation below 50°F (10°C) may affect light output or lamp operation – see "Low Temp. Starting" definition.

4 Complies with European Union Restriction of Hazardous Substances Directive.

System Life / Warranty

QUICKTRONIC products are covered by the QUICK 60+® warranty, a comprehensive lamp and ballast system warranty. For additional details, refer to the QUICK 60+ warranty bulletin.

OSRAM SYLVANIA
National Customer
Service and Sales Center
1-800-LIGHTBULB
(1-800-544-4828)
www.sylvania.com

Specifications subject to change without notice.

QHE T8 PSN

High Efficiency Parallel Wired, Type CC, Lamp Striation Control (120-277V)



Item Number	OSRAM SYLVANIA Description	Input Current (AMPS)	Lamp Type	Rated Lumens (lm)	No. of Lamps	Ballast Factor (BF)	Initial System Lumens	Mean System Lumens	Input Power (W) 120V 277V	System Efficacy¹ (lm/W)	BEF²
51397 ○ 51398 ○	QHE1x32T8/UNV PSN-MC Banded 10-Pack Pallet Pack	0.26/0.11	F032/700	2600	1	0.88	2290	2105	30 29	79	3.03
		0.26/0.11	F032XPS*	3100	1	0.88	2730	2565	30 29	94	3.03
		0.26/0.11	F032XP*/XL	2950	1	0.88	2595	2440	30 29	90	3.03
		0.24/0.10	F030/SS	2850	1	0.88	2510	2360	28 26	97	3.38
		0.22/0.10	F028/SS	2725	1	0.88	2400	2255	26 25	96	3.52
51408 ○ 51409 ○	QHE2x32T8/UNV PSN-MC Banded 10-Pack Pallet Pack	0.20/0.09	F025/SS	2475	1	0.88	2180	2045	23 23	95	3.83
		0.48/0.21	F032/700	2600	2	0.88	4575	4205	57 55	83	1.60
		0.48/0.21	F032XPS	3100	2	0.88	5455	5130	57 55	99	1.60
		0.48/0.21	F032XP*/XL	2950	2	0.88	5190	4980	57 55	94	3.03
		0.46/0.20	F030/SS	2850	2	0.88	5015	4715	55 53	95	1.66
51413 ○ 51414 ○	QHE3x32T8/UNV PSN-SC Banded 10-Pack Pallet Pack	0.43/0.18	F028/SS	2725	2	0.88	4795	4510	51 50	96	1.76
		0.38/0.16	F025/SS	2475	2	0.88	4355	4095	45 44	99	2.00
		0.69/0.29	F032/700	2600	3	0.88	6865	6310	83 82	84	1.07
		0.69/0.29	F032XPS	3100	3	0.88	8185	7695	83 82	100	1.07
		0.69/0.29	F032XP*/XL	2950	3	0.88	7790	7320	83 82	95	3.03
51418 ○ 51419 ○	QHE4x32T8/UNV PSN-SC Banded 10-Pack Pallet Pack	0.68/0.28	F030/SS	2850	3	0.88	7525	7075	80 78	96	1.13
		0.62/0.27	F028/SS	2725	3	0.88	7195	6760	73 72	100	1.22
		0.56/0.24	F025/SS	2475	3	0.88	6535	6140	67 66	99	1.33
		0.93/0.39	F032/700	2600	4	0.88	9150	8415	111 108	85	0.81
		0.93/0.39	F032XPS	3100	4	0.88	10,910	10,255	111 108	101	0.81
		0.93/0.39	F032XP*/XL	2950	4	0.88	10,385	9760	111 108	94	3.03
		0.89/0.38	F030/SS	2850	4	0.88	10,030	9430	105 103	97	0.85
		0.83/0.35	F028/SS	2725	4	0.88	9590	9015	98 95	101	0.93
		0.77/0.33	F025/SS	2475	4	0.88	8710	8190	91 89	98	0.99


Banded Pack contains 10 pieces each, (add "-B" to description). Pallet Pack contains 840 pieces, (add "-PAL" to description).

¹ System Efficacy is based on the lowest input Power


² BEF (Ballast Efficiency Factor) shown = (Ballast Factor x 100) divided by Input Power (Note: calculation based on lowest input power)

○ Preliminary specifications. Please contact OSRAM SYLVANIA for additional information.

1 lamp




2 lamp



Note: For 1L application, individually cap both RED leads.
Insulate to 600 volts.


4 lamp



Note: For 3L application, individually cap both RED leads.
For 2L application, individually cap both RED and BLUE leads.
For 1L application, individually cap both RED, BLUE and Red/White leads.
For lamps approved for 1L operation, see QUICKSYSTEMS.
Insulate to 600 volts.


Installation Notes Lamp wiring for 3 & 4 lamp QHE PSX "parallel" models vary from QTP series models. Be sure to wire ballasts per label/schematics shown on this bulletin.

3 lamp



Note: For 2L application, individually cap both RED leads.
For 1L operation, individually cap both RED and BLUE leads.
Insulate to 600 volts.

"SC" Overall: 9.5" L x 1.68" W x 1.18" H
"MC" Overall: 9.5" L x 1.30" W x 1.00" H
Mounting: 8.90"



Product Weight:
QHE1xPSN & QHE2xPSN: 0.66 lbs. each
QHE3xPSN & QHE4xPSN: 1.27 lbs. each

Wiring:
Leads only (no connectors provided)

Item Number — 51408 QHE 2 x 32T8 / UNV PSN - MC — Case Size
QUICKTRONIC High Efficiency — Starting/Ballast Factor
Number of Lamps — Line Voltage (120-277V)
— Primary Lamp Wattage

SYLVANIA, the system solution, OCTRON, XP, XPS, SUPERSAVER, PROStart, and QUICK 60+ are registered trademarks of OSRAM SYLVANIA Inc.
SEE THE WORLD IN A NEW LIGHT is a trademark of OSRAM SYLVANIA Inc. QUICKTRONIC is a registered trademark of OSRAM GmbH.

the system solution®

Date Submitted: Sept. 2, 2015

Distributor: C.E.D. Columbus, Oh 43207

©2013 OSRAM SYLVANIA

Contractor: Vaughn Industries

Job Name: OSU NRD T Building B

Job: OSU - NRD T

Ballast for Types:

A28, A42, A45, F25, K1

www.sylvania.com

QUICKTRONIC® PROStart® CF Universal Dual Entry Systems

<10% THD Electronic T4 Compact Fluorescent
Programmed Rapid Start Systems
Normal Ballast Factor



Professional Series

CF DUAL ENTRY

Lamp / Ballast Guide

Primary Systems

13W T4 – DULUX D/E, T/E lamps
1-lamp or 2-lamp QTP1/2x13CF/UNV

18W T4 – DULUX D/E, T/E lamps
1-lamp or 2-lamp QTP1/2x18CF/UNV

26W T4 – DULUX D/E, T/E lamps
1-lamp QTP2x26CF/UNV
2-lamp QTP2x26CF/UNV

32 or 42W T4 – DULUX T/E lamps
1-lamp QTP2x26CF/UNV
2-lamp QTP2x26/32/42CF/UNV

57W or 70W T4 – DULUX T/E lamp
1-lamp QTP2x26/32/42CF/UNV

For other lamp types, refer to the Performance Guide section on the next page.

SYLVANIA QUICKTRONIC PROStart CF ballasts operate DULUX® D/E and T/E lamps with full lumen output and optimal system performance.

QUICKTRONIC CF ballasts feature one mounting style of low profile, lightweight enclosures to provide simple assembly for any fixture application.


Universal input voltage (120–277V) and multi-lamp multi-watt capability allow for fewer SKUs to support a wide range of applications.

Dual entry, color coded connectors located on the side and bottom allow for increased mounting flexibility with one ballast and also increased ease of installation.

These ballasts are RoHS compliant and feature lead-free solder, printed circuit boards and manufacturing process.



Setting the standard for quality, QUICKTRONIC PROStart CF Systems are covered by our QUICK 60+® warranty, the first and most comprehensive system warranty in the industry.



Key System Features

- Universal Input Voltage (120–277V)
- Dual entry, color coded connectors
- PROStart Ballasts program rapid start
- QUICKSENSE ballast technology
- High Power Factor
- Low Harmonic Distortion
- Small size and lightweight
- Metal enclosure
- UL, CSA, FCC
- QUICK 60+ warranty
- RoHS compliant
- Lead-free solder, printed circuit board and manufacturing process



System Information

PROStart programmed rapid start is the optimum starting method, providing up to 100,000 switching cycles for use on occupancy sensors and building control systems.

QUICKSENSE® end-of-lamp-life sensing technology helps to protect against overheated bases and sockets, as well as cracking of the glass wall. QUICKSENSE ballast technology uses dynamic end-of-lamp-life sensing to avoid false shutdowns caused by some static sensing methods and will auto-reset when the end-of-life lamps are replaced with new ones.

QUICKTRONIC CF ballasts come with wire-trap connectors for quick and easy installation.

Small Metal Case

Dual Entry Metal with and without PEM Studs
Side & Bottom Mount Capabilities



QTP2x26/32/42CF/UNV Metal Case Models

Dual Entry Metal with and without PEM Studs
Side & Bottom Mount Capabilities



Application Information

SYLVANIA QUICKTRONIC CF ballasts

are ideally suited for:

- Recessed downlights
- Wall sconces
- Ceiling fixtures
- Commercial
- Retail, hospitality, institutional

ECS433 - 6-13

Date Submitted: Sept. 2, 2015

SEE THE WORLD IN A NEW LIGHT



Distributor: C.E.D. Columbus, Oh 43207

Contractor: Vaughn Industries


Job Name: OSU NRDT Building B

Job: OSU - NRDT
Ballast for Types:**Universal Voltage (120-277V)**


Item Number	Description ¹	Input Current (AMPS)	Lamp ¹ Type	Rated ² Lumens (lm)	No. of Lamps	Ballast Factor (BF)	System Lumens	Mean Lumens	Input Power (Watts)	System Efficacy (lm/W)	BEF ⁴	
51818	QTP1/2x13CF/UNV DM	0.25/0.11	13W DD/E,T/E	900	1	1.00	900	775	16	56	6.25	
			13W DD/E,T/E	900	2	1.00	1800	1550	29	62	3.45	
51823	QTP1/2x18CF/UNV DM	0.32/0.14	18W DD/E,T/E	1200	1	1.00	1200	1030	20	60	5.00	
			18W DD/E,T/E	1200	2	1.00	2400	2065	38	63	2.63	
51833	QTP2x26CF/UNV DM	0.50/0.22	26W DD/E,T/E	1800	1	1.00	1800	1550	28	64	3.57	
51898	QTP2x26CF/UNV DM PEM		26W DD/E,T/E	1800	2	1.00	3600	3095	54	67	1.85	
			32W DT/E	2400	1	0.98	2350	2025	35	67	2.80	
			42W DT/E	3200	1	0.96	3070	2640	45	68	2.13	
51843	QTP2x26/32/42CF/UNV DM	0.90/0.40	26W DT/E	1800	2	1.02	3670	3155	54	68	1.89	
51863	QTP2x26/32/42CF/UNV DM PEM		32W DT/E	2400	2	0.96	4610	3965	69	67	1.39	
			42W DT/E	3200	2	0.95	6080	5230	94	65	1.01	
			57W DT/E	4300	1	1.00	4300	3700	62	69	1.61	
		0.57/0.25	70W DT/E	5200	1	0.92	4780	4115	71	67	1.30	

¹ Also compatible with other manufacturers' equivalent 4 pin lamp types that meet ANSI specifications.² Rated lamp lumens and performance data based on DULUX T/E series 4 pin lamps.³ Data is for all models within the brackets. The maximum input current is shown for maximum input power.⁴ Ballast Efficiency Factor (BEF) shown = (Ballast Factor x 100) divided by Input Power (Note: calculation based on lowest wattage value).

Metal Case (51843 & 51863)

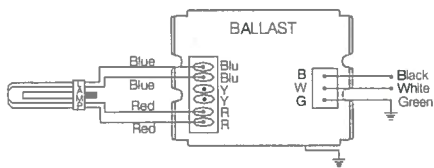

Small Metal Case (51818, 51823, 51833 & 51898)

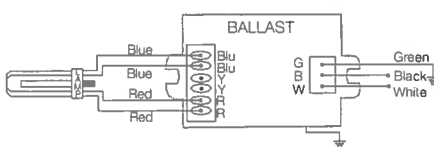**Dimensions:**

Metal case (51843 & 51863): 4.95" L x 2.93" W x 1.35" H

Small Metal case (51818, 51823, 51833 & 51898): 4.95" L x 2.37" W x 1.10" H

Mounting: Utilize flanges (4.57" L), or (2) #8-32 x 0.375" Long

PEM studs on 2" centers

Packaging:

Quantity: 20 pieces per case

16 pieces per case for Item Number 51898

18 pieces per case for Item Number 51863

Weight: 0.40 lbs ea. (Small Metal case)

0.90 lbs ea. (Metal case)

Wiring:

Push-in connectors (no leads provided)

Use 18AWG solid copper wire only

Item Number **51843 QTP 2 x 26/32/42 CF / UNV DM** Case Type (Dual Mount)
QUICKTRONIC PROFESSIONAL Line Voltage (120-277V)
Number of Lamps (1, 2) Primary Lamp Wattage

Normal Ballast Factor**CF** PROStart®**Professional Series****Performance Guide**

QTP 2x26CF/UNV models also operates:

1-lamp: CF28/2D, CF38/2D, FPC40/T5, FT40DL

1- or 2-lamp: FPC22/T5, FT24DL, FT24DF

2-lamp: CF13DSE, FT18DL, FT18DF, CF21/2D

QTP 2x26/32/42CF/UNV models also operates:

2-lamp: FT36DL, FT40DL, FPC40T5

1+1: FPC22/T5 / FPC40/T5

Specifications

Starting Method: Programmed Rapid Start

Circuit Type: Series

Lamp Frequency: >42 kHz

Lamp CCF: Less than 1.7

Starting Temp: -5°F/-20°C min.³

Input Frequency: 50/60 Hz

Low THD: <10%

Power Factor: >98%

Voltage Range: ±10% of 120-277V
rated line (108-305V)

UL Listed Class P, Type 1 Outdoor

CSA or CUL Certified

75°C Max Case Temp. (5 yr. warranty)

80°C Max Case Temp. (3 yr. warranty)

FCC 47CFR Part 18 Non-Consumer

Sound Rated A

RoHS Compliant⁶

ANSI C62.41 Cat. A Transient Protection

Dynamic End-of-Lamp-Life Sensing

Remote Mounting (Max. wire length from ballast case to lampholder): up to 15 feet for one lamp and up to 6 feet for two lamp.

5 Operation below 50°F (10°C) may affect light output or lamp operation – see Low Temperature Starting definition.

6 Complies with European Union Restriction of Hazardous Substances Directive (Directive EC 2002/95)

System Life / Warranty

QUICKTRONIC products are covered by the QUICK 60+® warranty, a comprehensive lamp and ballast system warranty. For additional details, refer to the QUICK 60+ warranty bulletin.

OSRAM SYLVANIA
National Customer
Service and Sales Center
1-800-LIGHTBULB
(1-800-544-4828)
www.sylvania.com

Specifications subject to change without notice.

SYLVANIA, the system solution, DULUX, QUICKSENSE, PROStart, and QUICK 60+ are registered trademarks of OSRAM SYLVANIA Inc. SEE THE WORLD IN A NEW LIGHT is a trademark of OSRAM SYLVANIA Inc. QUICKTRONIC is a registered trademark of OSRAM GmbH.

the system solution®

Date Submitted: Sept. 2, 2015

Distributor: C.E.D. Columbus, Oh 43207

CF DUAL ENTRY

©2013 OSRAM SYLVANIA

Contractor: Vaughn Industries

Job Name: OSU NRD Building B

Submitted by Spectrum Lighting, Inc.


Job Name:
 OSU - NRD BUILDINGS

Catalog Number:
 MS-A102-IVORY

Notes:

Type:

SPEC14-5147

Maestro®**Dual Technology Occupancy Sensor Switch****Sensor**

369773c 1 04.09.14


Maestro® Dual Technology Sensor Switch

The Maestro® Dual Technology (Dual Tech) Occupancy Sensor Switch applies our exclusive XCT™ Technology to the ultrasonic as well as the passive infrared technology in this sensor to create a product that can detect very fine motion, such as typing. This product also includes all of the great features found in the rest of the Maestro® sensor family, including: adaptive relay switching, smart ambient light detection, and simple button presses for changing settings. The Maestro® Dual Tech Occupancy Sensor Switch is available in single-circuit and dual-circuit versions.


The single-circuit versions (MS-A102, MS-B102) can be used to meet many of the Title 20/24, ASHRAE 90.1, and IECC code requirements such as "automatic shutoff". The dual-circuit versions (MS-A202, MS-B202) can be used to meet many of the Title 20/24, ASHRAE 90.1, and IECC code requirements such as "automatic shutoff" and "multi-level lighting control". To find some examples of code-specific applications, visit www.lutron.com/energycodes

Features

- XCT™ Technology for major, minor, fine, and very fine motion detection
- 180° sensor field-of-view
- Tamper-resistant PIR lens
- Up to 900 ft² (81 m²) major motion coverage and 400 ft² (36 m²) minor motion coverage
- Two Ambient Light Detect (ALD) options:
 - Learning ALD Mode:
Uses adaptive algorithm.
Sensor learns user's preferred light level over time.
 - Fixed ALD mode:
Four selectable light level thresholds: Hi, Med, Low, Min
- Occupancy models (MS-A102-XX, MS-B102-XX, MS-A202-XX, MS-B202-XX) can be set to Auto-ON/Auto-OFF or Manual-ON/Auto-OFF per circuit
- Dual-circuit models (MS-A202, MS-B202) meet Title 24 requirements for multi-level lighting control.
- Single-circuit "Vacancy" models (MS-A102-V-XX, MS-B102-V-XX) available to meet Title 24/Title 20 requirements for vacancy sensors.
- Adjustable timeout for each circuit (1, 5, 15, or 30 minutes)
- Sensitivity adjustment
 - PIR (Hi, Med, Low, Min)
 - Ultrasonic (Hi, Med, Low, Off)
- Switches all lighting loads: incandescent, halogen, ELV, MLV, CFL, LED, magnetic fluorescent, electronic fluorescent
- Switches fan loads at 120 V~
- MS-B102, MS-B102-V work with Maestro® accessory switches in multi-location applications
- MS-A models DO NOT require neutral wiring, while the MS-B models DO require neutral wiring.

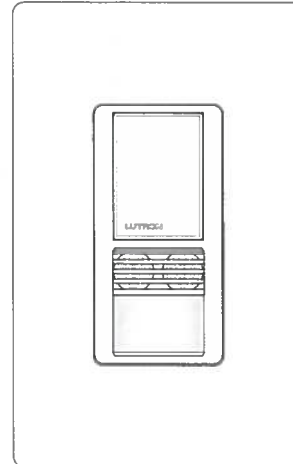

MS-A102-XX (Occupancy model)
 MS-A102-V-XX (Vacancy model)
 MS-B102-XX (Occupancy model)
 MS-B102-V-XX (Vacancy model)

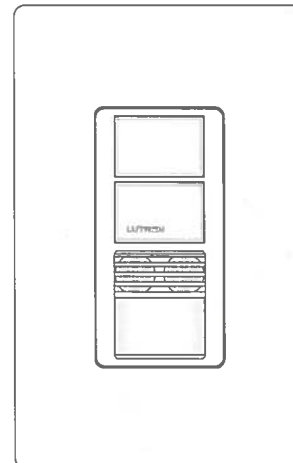

MS-A202-XX (Occupancy model)
 MS-B202-XX (Occupancy model)

Notes:

- "XX" in the model number represents color/finish code. See **Colors and Finishes** at end of document.
- Wallplate not included.

LUTRON® SPECIFICATION SUBMITTAL

Page

Job Name:

Model Numbers:

Job Number:

Contractor: Vaughn Industries

Job Name: OSU NRDT Building B

Submitted by Spectrum Lighting, Inc.


Job Name:
OSU - NRDT BUILDINGS

Catalog Number:
MS-A102-

Notes:

Type:

SPEC14-5147

Maestro®**Dual Technology Occupancy Sensor Switch****Sensor**

369773c 2 04/09/14

Specifications**Regulatory Approvals**

- UL Listed to U.S. and Canadian safety requirements (applies only to MS-B102, MS-B102-V, MS-B202)
- NOM certified
- Title 20/24 certified lighting control device
 - Complies with Title 20 and Title 24 section 110.9

Power/Load Control

- 120–277 V~ 50/60 Hz

Key Design Features

- Dual Sensing Technology
- Switches all lighting loads
- 6 A of lighting load per circuit at 120–277 V~
- 4.4 A (1/6 HP) of fan load per circuit at 120 V~
- Crush/tamper resistant lens
- Smart Ambient Light Detection (ALD)
- Fixed Ambient Light Detection
- Adaptive zero-cross switching algorithm for extended relay life (patent pending)
- XCT™ Technology for major, minor, fine, and very fine motion detection
- Programmable Circuit Swapping eliminates need for rewiring to reassign circuits after installation of a dual-circuit product. (patent pending)
- Product ground current does not exceed 0.5 mA

Environment

- Ambient operating temperature: 32 °F to 104 °F (0 °C to 40 °C), 0%–90% humidity, non-condensing. Indoor use only.

Warranty

- 5-Year Limited Warranty. For additional Warranty information, please visit www.lutron.com/TechnicalDocumentLibrary/Sensor_Warranty.pdf

Sensor Detection

Lutron® Dual Tech sensors operate by triggering initial occupancy using PIR technology, and maintain occupancy using both ultrasonic and PIR technology.

Advanced Features**Switching**

- Adaptive zero-cross switching—maximizes relay life by switching at the point of minimum energy on the AC power curve (patent pending). Actively adapts to variations in relay timing.

Additional Information on Sensors

- For single-circuit PIR Maestro® Occupancy Sensor Switch models, please see Lutron® P/N 369666
- For Maestro® Occupancy Sensor C•L® Dimmer models, please see Lutron® P/N 369748
- For dual-circuit PIR Maestro Occupancy Sensor Switch, please see Lutron® P/N 369758
- For more information, please see www.lutron.com/occvacensors
- Lutron Technical Hotline: 1.800.523.9466.

LUTRON® SPECIFICATION SUBMITTAL

Page

Job Name:

Model Numbers:

Job Number:

Contractor: Vaughn Industries

Job Name: OSU NRD Building B

Submitted by Spectrum Lighting, Inc.



Job Name:
OSU - NRD BUILDINGS

Catalog Number:
MS-A102-

Notes:

Type:

SPEC14-5147

Maestro®**Dual Technology Occupancy Sensor Switch****Sensor**

369773c 3 04.09.14

Custom Settings

Default settings shown in bold

⌚ - Timeout

- 30 min
- **15 min**
- 5 min
- 1 min

Mode - Sensor Modes

Lights automatically turn off in all sensor modes

- **Occ - Occupancy mode (No ALD)**^{1,2,3}
- Lrn - Occupancy with learning ALD mode
- Fixd - Occupancy with fixed ALD mode
- Vac - Vacancy mode (No ALD)^{2,3}

¹ MS-A102-XX, MS-B102-XX default is Occ
² MS-A102-V-XX, MS-B102-V-XX is locked as Vac
³ MS-A202-XX, MS-B202-XX defaults are: Circuit 1 - Occ, Circuit 2 - Vac

🔊 - Ultrasonic Sensitivity

- High
- **Med**
- Low
- Off

PIR - Passive Infrared Sensitivity

- **High**
- Med
- Low
- Min

Additional Settings**Fixed ALD Light Level**

- Hi
- Med
- **Low***
- Min

*"Low" is the default setting for any sensor that is set by the user to: Occupancy with fixed ALD mode

f-While-Occupied

- **Enabled**
- Disabled

Walk-Thru Mode

- Enabled
- **Disabled**

Custom Settings - Details**Ambient Light Detection (ALD) mode**

Lights turn on only when natural light in the room is below the set threshold.

- **Learning:** The ambient light threshold adjusts to the user's preference via manual interaction with the sensor switch.
- **Fixed:** Choose a fixed ALD light level from four pre-set options:
High, Medium, Low, and Minimum

Manual Off-While-Occupied Options**ENABLED** (default setting)

- When the sensor switch is manually turned off, the sensor switch will not turn the lights back on automatically while the room is occupied.
- Once the room is vacated, the Auto-On feature returns to normal operation after the timeout period has expired.
- This may be the preference in conference rooms or classrooms while viewing presentations. This feature requires motions to keep the lights off.

DISABLED

- When the sensor switch is manually turned off, the Auto-On feature will return to normal operation after 25 seconds.
- This may be the preference in a restroom if the user always wants the lights to turn on upon entering and the lights to turn off when the room is vacant.

Walk-Thru Mode**ENABLED**¹

- If motion is not detected within 3 minutes after initial occupancy, the lights will turn off after 3 minutes, instead of the current timeout.
- This setting may be the preference in commercial applications where personnel may briefly trigger sensors during non-working hours.

DISABLED (default setting)

- When motion is detected, the lights will ALWAYS remain on for the entire timeout duration, regardless of the duration of occupancy detection.

¹ 1 minute timeout would be overridden if walk-thru mode is also ENABLED**LUTRON® SPECIFICATION SUBMITTAL****Page**

Job Name:	Model Numbers:
Job Number:	

Contractor: Vaughn Industries

Job Name: OSU NRD Building B

Submitted by Spectrum Lighting, Inc.


Job Name:
OSU - NRD BUILDINGS

Catalog Number:
MS-A102-

Notes:

Type:

SPEC14-5147

Maestro®

Dual Technology Occupancy Sensor Switch

Sensor

369773c 4 04.09.14

Load Type and Capacity

Control	Neutral Connection Required	Vacancy Only	Number of Circuits	Voltage / Load Type / Maximum Load (Anywhere in Gang) ¹	Minimum Load	3-Way with Mechanical Switch	Multi-Location with Accessory Switch
→					0 A		
				Lighting 6 A ²			
				120 V~ Fan 4.4 A (1/6 HP) ³			

¹ Ratings shown are per circuit.² Sensor Switch Load Type: Designed for use with permanently installed incandescent, halogen, MLV, ELV, CFL, LED, magnetic fluorescent, and electronic fluorescent lighting loads.³ When controlling light and fan loads simultaneously on a single-circuit, maximum load capacity per circuit is 4.4 A at 120 V~.

Sensor Switch Placement

- The sensor switch performs better with an unobstructed view of room occupants.
- Hot objects and moving air currents can affect the performance of the sensor switch. The sensor switch performs best when located 6 ft (1.8 m) or more away from hot objects or moving air currents.
- The PIR performance depends on a temperature differential between the ambient room temperature and that of room occupants. Warmer rooms may reduce the ability of the sensor switch to detect occupants.
- The ultrasonic performance can be affected by air currents and moving objects. Consider the effects of fans, HVAC vents, open windows, or moving objects when installing the sensor switch.
- If the sensor sees a specific area that is not desired (e.g., hallway), Lutron offers a lens mask kit (Lutron P/N 50013614) that can be ordered through Tech Support (1.800.523.9466). Alternatively, selectively placing opaque tape (e.g., painter's tape, electrical tape, masking tape) over certain parts of the lens can limit its field of vision to block undesired detection areas. Masking the lens may effect ALD performance, but DOES NOT block ultrasonic frequencies.

Definitions

Major motion: movement of a person entering or passing through an area.

Minor motion: movement of a person occupying an area and engaging in small activities (e.g., reaching for a telephone, turning the pages of a book, opening a file folder, picking up a coffee cup).

Fine Motion: movement of a person occupying an area and engaging in very small activities (e.g., reading a magazine).

Very Fine Motion: movement of a person occupying an area and engaging in very small activities (e.g., typing on a keyboard).

LUTRON® SPECIFICATION SUBMITTAL

Page

Job Name:	Model Numbers:
Job Number:	

Contractor: Vaughn Industries

Job Name: OSU NRD Building B

Submitted by Spectrum Lighting, Inc.


Job Name:
 OSU - NRD BUILDINGS

Catalog Number:
 MS-A102-

Notes:

Type:




SPEC14-5147

Maestro**Dual Technology Occupancy Sensor Switch****Sensor**

369773c 5 04.09.14

Sensor Switch Placement (continued)**NEMA WD7 Coverage**

-  Major motion coverage: 900 ft² (81 m²)
-  Minor motion coverage: 400 ft² (36 m²)

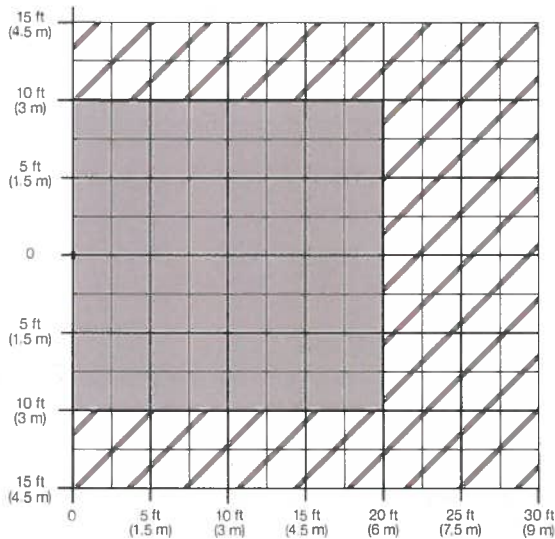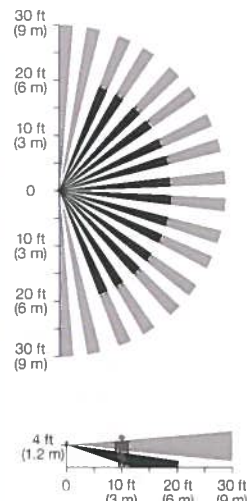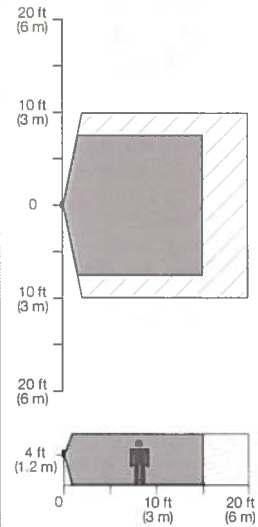**Passive Infrared Beam Diagram (For Reference Only)****Ultrasonic Coverage (For Reference Only)**

Ultrasonic Frequency: 40 kHz

LUTRON SPECIFICATION SUBMITTAL

Page

Job Name:

Model Numbers:

Job Number:

Contractor: Vaughn Industries

Job Name: OSU NRDT Building B

Submitted by Spectrum Lighting, Inc.



Job Name:
OSU - NRDT BUILDINGS

Catalog Number:
MS-A102-

Notes:

Type:

SPEC14-5147

Maestro®

Dual Technology Occupancy Sensor Switch

Sensor


369773c 6 04.09.14

Dimensions - Single-Circuit MS-A102, MS-A102-V, MS-B102, MS-B102-V


Measurements shown as: in (mm).

Front View


Side View

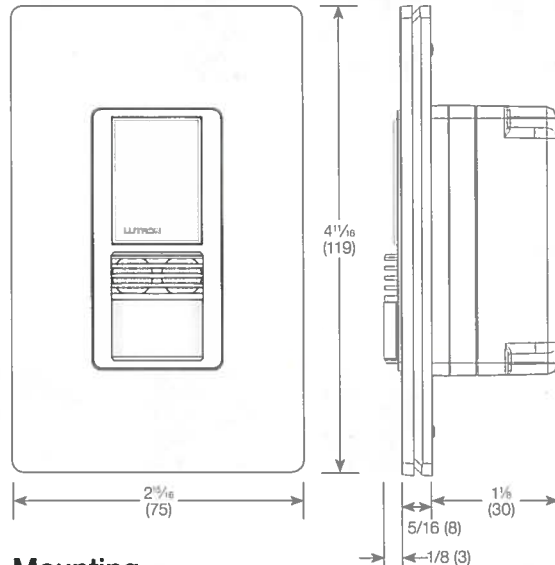

Operation

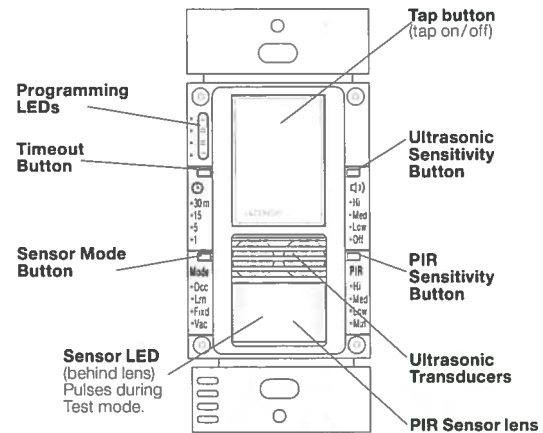

Mounting

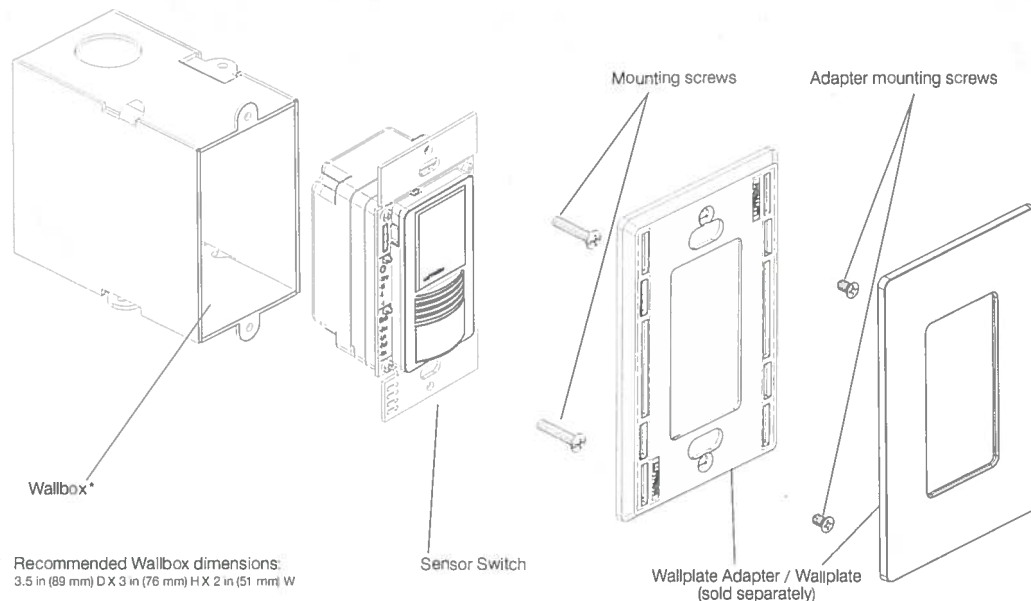

* Recommended Wallbox dimensions:
3.5 in (89 mm) D X 3 in (76 mm) H X 2 in (51 mm) W

LUTRON® SPECIFICATION SUBMITTAL

Page

Job Name:

Model Numbers:

Job Number:

Contractor: Vaughn Industries

Job Name: OSU NRD Building B

Submitted by Spectrum Lighting, Inc.


Job Name:
OSU - NRD BUILDINGS
Catalog Number:

MS-A102-

Notes:

Type:

SPEC14-5147

Maestro®

Dual Technology Occupancy Sensor Switch

Sensor



369773c 14 04.09.14

Colors and Finishes

Gloss Finishes

White
WHIvory
IVAlmond
ALLight Almond
LAGray
GRBrown
BRBlack
BL

Satin Finishes

Hot
HTMerlot
MRPlum
PLTurquoise
TQTaupe
TPEggshell
ESBiscuit
BISnow
SWPalladium
PDMidnight
MNSienna
SITerracotta
TCGreenbriar
GBBluestone
BGMocha Stone
MSGoldstone
GSDesert Stone
DSStone
STLimestone
LSSea Glass
SG

- Due to printing limitations, colors and finishes shown cannot be guaranteed to match actual product colors perfectly.
- Color chip keychains are available for more precise color matching:
Gloss Finishes: DG-CK-1
Satin Finishes: SC-CK-1

LUTRON® SPECIFICATION SUBMITTAL

Page

Job Name:

Model Numbers:

Job Number:

Contractor: Vaughn Industries

Job Name: OSU NRDT Building B

Submitted by Spectrum Lighting, Inc.


Job Name:
OSU - NRDT BUILDINGS
Catalog Number:

NT-1000-

Notes:

Type:

SPEC14-5147

Nova T ☆ | slide-to-off dimmers

 For more information
visit www.lutron.com/novat
slide-to-off dimmers (single pole)


- slide up to brighten, down to dim
- small control shown
- large control measures 4.56" x 4.56" (fits into a 1-gang backbox)
- NT-2000- requires a 2-gang backbox

incandescent/halogen (small control)

single pole	600W	NT-600-
single pole	1000W	NT-1000-
incandescent/halogen (large control)		
single pole	1500W	NT-1500-
single pole	1950W	NT-2000-

For NT-2000- installations all side sections (fins) must remain intact.

magnetic low-voltage (small control)

single pole	120V	NTLV-600-
	600VA (450W)	
single pole	120V	NTLV-1000-
	1000VA (800W)	
single pole	277V*	NTLV-600-277-
	600VA (450W)	
single pole	277V*	NTLV-1000-277-
	1000VA (800W)	

magnetic low-voltage (large control)

single pole	1500VA (1200W)	NTLV-1500-
-------------	----------------	-------------------

Suggested maximum lighting load for magnetic low-voltage dimming is 450W for 600VA products, 800W for 1000VA products, and 1200W for 1500VA products to allow for transformer losses.

electronic low-voltage* (small control)

single pole	300W	NTELV-300-
single pole	600W	NTELV-600-

* requires neutral wire connection

See page 23 for available colors.

To order, add color suffix to model number.

 Example: **NT-600- WH**
fluorescent dimming with Hi-lume[®], Compact SE[®], Eco-10[®], EcoSystem[®] ballasts, and Hi-lume[®] LED


- use with Lutron[®] 3-wire line-voltage control electronic dimming ballasts
- please refer to the Lutron[®] Fluorescent Dimming Systems Selection Guide (P/N 366-002) for more information
- no derating if ganged

fluorescent* (small control)

single pole	120V	16A	NTF-10-
single pole	277V	8A	NTF-10-277-

LED with Hi-lume[®] LED driver only*
NEW

single pole	120V	16A	NTF-10-
single pole	277V	8A	NTF-10-277-

fluorescent dimming with Tu-Wire[®] ballasts


- use with Lutron[®] Tu-Wire[®] line-voltage control electronic dimming ballasts
- for information on using Lutron[®] dimmers to control Advance[®] Mark 10[®] dimming ballasts, visit the Lutron[®] website at www.lutron.com/advance
- must be derated if ganged

fluorescent Tu-Wire[®] (small control)

single pole	120V	5A	NTFTU-5A-
single pole	277V*	5A	NTFTU-5A-277-

requires neutral wire connection

Contractor: Vaughn Industries

Job Name: OSU NRD Building B

Submitted by Spectrum Lighting, Inc.


Job Name:
OSU - NRD BUILDINGS


Catalog Number:
NT-1000-

Notes:

Type:

SPEC14-5147

Nova T☆ dimmers, fan controls & switches

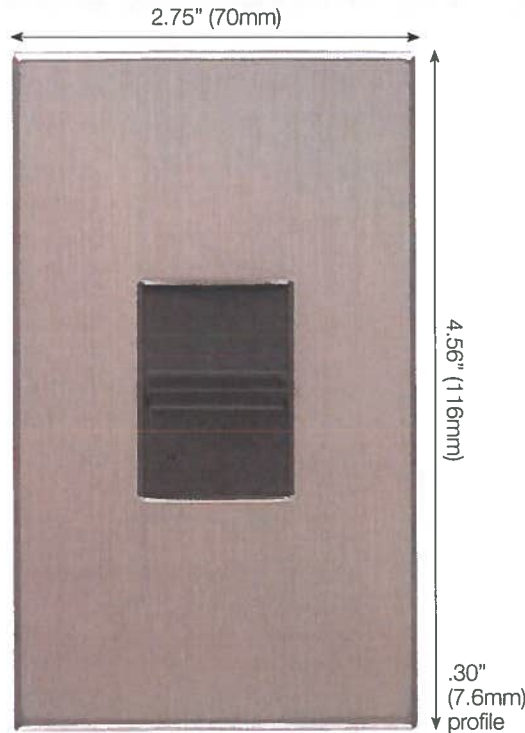

Shown actual size: Nova T☆ dimmer in satin nickel (SN) (includes wallplate)

NOVA T☆ dimmers

product family features

- exclusive dimmer/switch size opening
- slide adjusts light to suit any activity
- classic slider, thin-profile design
- full family of controls plus matching fan controls, switches and wiring devices
- dimmer includes 1-gang wallplate
- use “no fins broken” wallplates for full wattage capacity in multi-gang applications
- voltage compensation maintains stable light levels despite line voltage variations

Questions on installation or selection?
Call Lutron® 24 hours/7 days a week at
1.800.523.9466 or visit www.lutron.com

1.800.523.9466

available models

- incandescent/halogen lighting
- magnetic low-voltage lighting
- electronic low-voltage lighting
- neon/cold cathode
- fluorescent lighting
- LED lighting
- quiet 3-speed fan controls
- fully variable fan controls
- motorized window treatments

- single pole (one location)
- 3-way (two locations)
- 4-way switches (three locations) available

available colors

see page 14 for color swatches)

- | | |
|------------------------|------------------|
| WH white | GR gray |
| BE beige | TP taupe |
| IV ivory | BR brown |
| AL almond | BL black |
| LA light almond | SI sienna |

- | | |
|--------------------------|-------------------------|
| SB | SC satin chrome |
| BB | SN satin nickel |
| BC | BN bright nickel |
| QB antique brass | AU gold plate |
| QZ antique bronze | |

anodized aluminum

- | | |
|------------------|------------------|
| CLA clear | BRA brass |
| BLA black | |

• with a paint color number, swatch sample. Lutron® can color match your color. Contact Customer Service at 1.888.LUTRON.

Multi-gang, screwless, seamless wallplate available – wallplate selector tool at www.lutron.com/lutron/wallplate

CAD file downloads available at www.lutron.com

Contractor: Vaughn Industries

Job Name: OSU NRD Building B

Submitted by Spectrum Lighting, Inc.


Job Name:
OSU - NRD BUILDINGS
Catalog Number:

OAC-DT-1000-R

Notes:

Type:

SPEC14-5147



OAC-DT, MicroSet Dual Tech Ceiling Sensor Low Voltage

PIR
ActivatedUltrasonic
ActivatedMicroSet
Self-AdjustingCalifornia
Title 24
Compliant

- MicroSet self-adjusting Time Delay and sensitivity
- Optional built-in light level sensor
- Optional BAS/HVAC isolated relay
- NEMA WD7 Standard robotic method utilized to verify coverage patterns
- Selectable Walk Through Mode

Specifications:

Technology: Passive Infrared (PIR) and Ultrasonic (US)

Power Requirements:

Input:

- 10-30 VDC from Greengate Switchpack or Greengate system.
- Maximum current needed is 25mA per sensor.

Output:

- Open collector output to switch up to ten Greengate Switchpacks.
- BAS with Isolated Form C Relay in (-R) model.
- Isolated Form C Relay Ratings: 1A 30 VDC/VAC.

Time Delays: Self-adjustable, 15 seconds/test (10 min. Auto), or Selectable 5, 15, 30 minutes, or Zero Time Delay

Coverage: 500, 1000, and 2000 sq. ft.

Light Level Sensing (-R models): 0 to 300 foot-candles

Operating Environment:

- Temperature: 32°F - 104°F (0°C - 40°C)
- Relative humidity: 20% to 90%, non-condensing
- For indoor use only

Housing: Durable, injection molded housing. Polycarbonate resin complies with UL 94V0.

Size: 4.5"H x 1.42"W (114.3mm x 36.068mm)

LED lamp: Green LED for Ultrasonic

Red LED for Passive Infrared

Warranty: Five year

FCC Compliant

cULus Listed

RoHS Compliant RoHS

www.coopercontrol.com

Catalog #	Type
Project	
Comments	
Prepared by	Date



Overview

The Dual Technology sensor's combination of Ultrasonic and Passive Infrared technologies offers the most complete sensing equipment available today. This pairing helps eliminate false activations or deactivations for additional energy savings. The OAC-DT sensors are also equipped with MicroSet self-adjusting technology which provides an adaptive and airflow tolerant technology, making them ideal for spaces which have increased airflow due to higher occupant levels. MicroSet self-adjusting Dual Technology sensors drastically simplify and reduce a contractor's installation and adjustment time period.

Technology

The MicroSet self-adjusting technology continuously monitors multiple sub-frequencies in the event that if a continuous Doppler shift occurs, such as those created by airflow from an air duct, the sensor will identify the noise as continuous and then block it out of view at a select sub-frequency. It will continue to monitor other sub-frequencies for human motion. This avoids false-activation, while still maintaining the high level of sensitivity that is necessary for sensing minor motion in a changing environment. Separate concurrent time delays for both Passive Infrared and Ultrasonic technologies avoid false activations or deactivations. In Automatic ON Mode, the lights turn ON when a person enters the room. In Manual On Mode (-R model only), the lights are turned ON by activating a momentary switch (model # GMDS-*) that is connected to the sensor. When enabled, the daylighting feature (-R models only) prevents lights from turning ON when the room is adequately illuminated by natural light.

Applications

classrooms	common areas	hallways
conference rooms	computer rooms	other indoor office spaces
office spaces	break rooms	

Ordering

Catalog #	Recommended Room Size	Field of View	Frequency	Features
OAC-DT-2000-R	2,000 sq. ft.	Two Way (360°)	32 kHz	w/BAS Relay & Daylight Sensor
OAC-DT-2000	2,000 sq. ft.	Two Way (360°)	32 kHz	
OAC-DT-1000-R	1,000 sq. ft.	Two Way (360°)	32 kHz	w/BAS Relay & Daylight Sensor
OAC-DT-1000	1,000 sq. ft.	Two Way (360°)	32 kHz	
OAC-DT-0501-R	500 sq. ft.	One Way (180°)	40 kHz	w/BAS Relay & Daylight Sensor
OAC-DT-0501	500 sq. ft.	One Way (180°)	40 kHz	

203 Cooper Circle
Peachtree City, GA 30269P: 800-553-3879
F: 800-954-7016

Occupancy Sensors - Ceiling Mount

Contractor: Vaughn Industries

Job Name: OSU NRD Building B

Submitted by Spectrum Lighting, Inc.


Job Name:
OSU - NRD BUILDINGS

Catalog Number:
OAC-DT-1000-R

Notes:

Type:


SPEC14-5147

Wiring Diagrams

OAC-DT, MicroSet Dual Tech Low Voltage

One Sensor, One Switchpack


Manual or Automatic-On Control of Two Standard Switchpacks

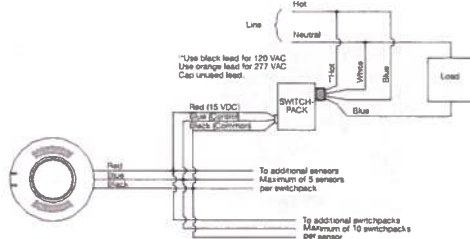

SENSOR WIRE LEAD LEGEND

- Black (Common)
- Red (15-30VDC)
- Blue (Control - Occupancy)
- Yellow (Control - Occupancy and Daylight)
- Brown (Switch-Blue Lead Control)
- Brown/White (Switch-Blue Lead Control)
- Sensor's Isolated Relay
- Orange (Normally Open)
- Gray (Common)
- Purple (Normally Closed)

Recommended Wire: 18-3 AWG stranded non-shielded

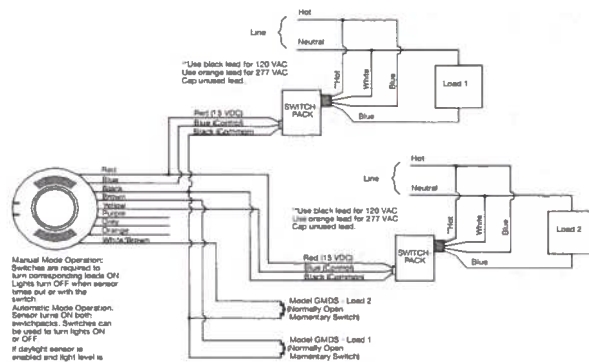

Manual Mode Operation:
Switches are required to turn corresponding leads Off. Lights turn Off when sensor times out or with the switch.

Automatic Mode Operation:
Sensor turns On both switchpacks. Switches can be used to turn lights On or Off.


Daylight Sensor:
If daylight sensor is enabled and light level is above setpoint, switchpacks connected to yellow lead will not turn On.

Recommended Wire:
18-3 AWG Stranded Wire non-shielded.

Coverage

OAC-DT-0501-R
500 sq. ft.

OAC-DT-1000-R
1,000 sq. ft.

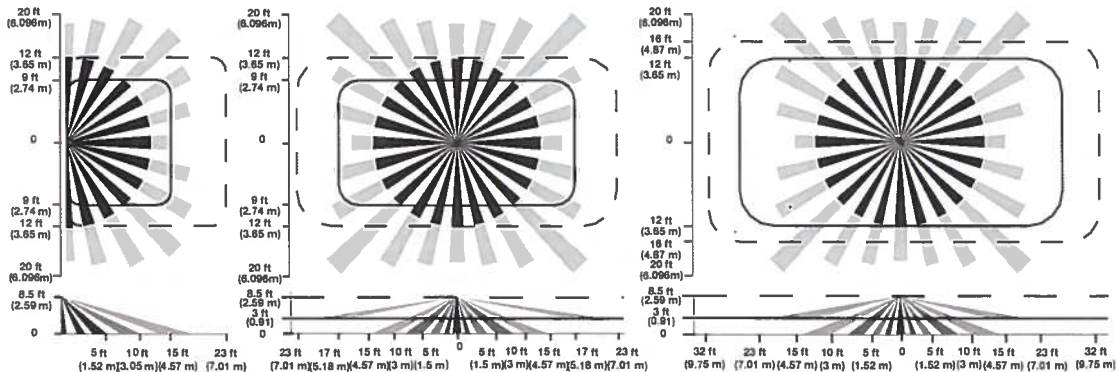OAC-DT-2000-R
2,000 sq. ft.


Recommended Mounting Height: 8 to 12 ft

Minor Motion, IR

Major Motion, IR

Minor Motion, Ultrasonic

Major Motion, Ultrasonic

Maximum coverage area may vary somewhat according to room shape and the presence of obstacles.

The NEMA WD 7 Standard and robotic method were utilized to verify coverage patterns.

Controls


DIP Switch Legend

DIP Switch	Time Delay	Activation	PIR Sensitivity	Walk-Through Mode	LEDs	Override	Sweep	Full/Half Logic	HVAC/Tracking	Zero Time Delay
1	2	Relay 1	3	Relay 2	4	5	6	7	8	9
Auto*	5 Minutes	Auto	Auto	Auto	Auto	Auto	Auto	Auto	Auto	Auto
5 Minutes	15 Minutes	Manual	Manual	Manual	Manual	Manual	Manual	Manual	Manual	Manual
15 Minutes	30 Minutes	(-R model only)	(-R model only)	(-R model only)	(-R model only)	(-R model only)	(-R model only)	(-R model only)	(-R model only)	(-R model only)
30 Minutes										

Default =

Daylight Sensor Adjustment

Ultrasonic Sensitivity Adjustment



www.coopercontrols.com
203 Cooper Circle, Peachtree City, GA 30269
P: 800-553-3879 F: 800-954-7016

ACC120009

Cooper Controls, Greengate, Novus, Yell Box, PDI Lighting Control Systems, VisionTouch, VisionSwitch, MicroSet, Digis, ControlKeeper, Larkkeeper, Revio, Inno, TracKeeper, InnoRelay are valuable trademarks of Cooper Industries in the U.S. and other countries. You are not permitted to use Cooper Trademarks without the prior written consent of Cooper Industries.

COOPER Controls

Date Submitted: Sept. 2, 2015

Distributor: C.E.D. Columbus, Oh 43207

Contractor: Vaughn Industries

Job Name: OSU NRDT Building B

Submitted by Spectrum Lighting, Inc.


Job Name:
OSU - NRDT BUILDINGS

Catalog Number:
OAC-DT-0501-R

Notes:

Type:

SPEC14-5147



Greengate

OAC-DT, MicroSet Dual Tech Ceiling Sensor Low Voltage

PIR
ActivatedUltrasonic
ActivatedMicroSet
Self-AdjustingCalifornia
Title 24
Compliant

- MicroSet self-adjusting Time Delay and sensitivity
- Optional built-in light level sensor
- Optional BAS/HVAC isolated relay
- NEMA WD7 Standard robotic method utilized to verify coverage patterns
- Selectable Walk Through Mode

Specifications:

Technology: Passive Infrared (PIR) and Ultrasonic (US)

Power Requirements:

Input:

- 10-30 VDC from Greengate Switchpack or Greengate system.
- Maximum current needed is 25mA per sensor.

Output:

- Open collector output to switch up to ten Greengate Switchpacks.
- BAS with Isolated Form C Relay in (-R) model.
- Isolated Form C Relay Ratings: 1A 30 VDC/VAC.

Time Delays: Self-adjustable, 15 seconds/test (10 min. Auto), or Selectable 5, 15, 30 minutes, or Zero Time Delay

Coverage: 500, 1000, and 2000 sq. ft.

Light Level Sensing (-R models): 0 to 300 foot-candles

Operating Environment:

- Temperature: 32°F - 104°F (0°C - 40°C)
- Relative humidity: 20% to 90%, non-condensing
- For indoor use only

Housing: Durable, injection molded housing.

Polycarbonate resin complies with UL 94V0.

Size: 4.5"H x 1.42"W (114.3mm x 36.068mm)

LED lamp: Green LED for Ultrasonic

Red LED for Passive Infrared

Warranty: Five year

FCC Compliant

cULus Listed

RoHS Compliant RoHS

www.coopercontrol.com

Catalog #	Type
Project	
Comments	
Prepared by	Date



Overview

The Dual Technology sensor's combination of Ultrasonic and Passive Infrared technologies offers the most complete sensing equipment available today. This pairing helps eliminate false activations or deactivations for additional energy savings. The OAC-DT sensors are also equipped with MicroSet self-adjusting technology which provides an adaptive and airflow tolerant technology, making them ideal for spaces which have increased airflow due to higher occupant levels. MicroSet self-adjusting Dual Technology sensors drastically simplify and reduce a contractor's installation and adjustment time period.

Technology

The MicroSet self-adjusting technology continuously monitors multiple sub-frequencies in the event that if a continuous Doppler shift occurs, such as those created by airflow from an air duct, the sensor will identify the noise as continuous and then block it out of view at a select sub-frequency. It will continue to monitor other sub-frequencies for human motion. This avoids false-activation, while still maintaining the high level of sensitivity that is necessary for sensing minor motion in a changing environment. Separate concurrent time delays for both Passive Infrared and Ultrasonic technologies avoid false activations or deactivations. In Automatic ON Mode, the lights turn ON when a person enters the room. In Manual On Mode (-R model only), the lights are turned ON by activating a momentary switch (model # GMDS-) that is connected to the sensor. When enabled, the daylighting feature (-R models only) prevents lights from turning ON when the room is adequately illuminated by natural light.

Applications

classrooms	common areas	hallways
conference rooms	computer rooms	other indoor office spaces
office spaces	break rooms	

Ordering

Catalog #	Recommended Room Size	Field of View	Frequency	Features
OAC-DT-2000-R	2,000 sq. ft.	Two Way (360°)	32 kHz	w/BAS Relay & Daylight Sensor
OAC-DT-2000	2,000 sq. ft.	Two Way (360°)	32 kHz	
OAC-DT-1000-R	1,000 sq. ft.	Two Way (360°)	32 kHz	w/BAS Relay & Daylight Sensor
OAC-DT-1000	1,000 sq. ft.	Two Way (360°)	32 kHz	
OAC-DT-0501-R	500 sq. ft.	One Way (180°)	40 kHz	w/BAS Relay & Daylight Sensor
OAC-DT-0501	500 sq. ft.	One Way (180°)	40 kHz	

 203 Cooper Circle
 Peachtree City, GA 30289

 P: 800-553-3879
 F: 800-954-7018

Occupancy Sensors - Ceiling Mount

Contractor: Vaughn Industries

Job Name: OSU NRD Building B

Submitted by Spectrum Lighting, Inc.


Job Name:
 OSU - NRD BUILDINGS

Catalog Number:
 OAC-DT-0501-R

Notes:

Type:


SPEC14-5147

Wiring Diagrams

OAC-DT, MicroSet Dual Tech Low Voltage

One Sensor, One Switchpack


Manual or Automatic-On Control of Two Standard Switchpacks

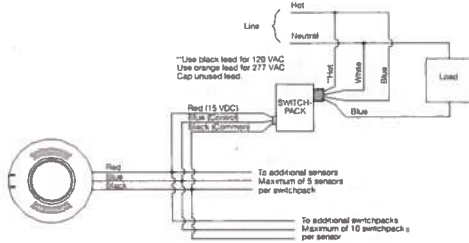

SENSOR WIRE LEAD LEGEND

Black	(Common)
Red	(15-30VDC)
Blue	(Control - Occupancy)
Yellow	(Control - Occupancy and Daylight)
Brown	(Switch-Blue Lead Control)
Brown/White	(Switch-Yellow Lead Control)
Sensor's Isolated Relay	(Normally Open)
Orange	(Common)
Grey	(Normally Closed)
Purple	(Normally Closed)

Recommended Wire: 18-3 AWG stranded non-shielded

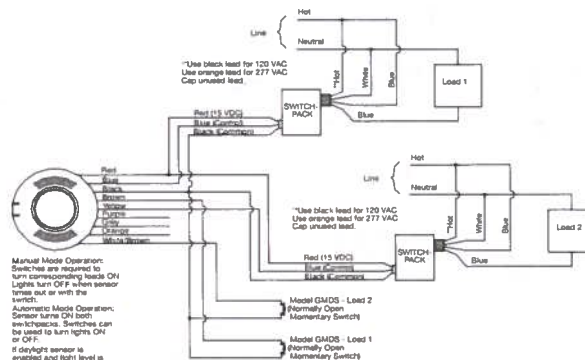

Manual Mode Operation:
 Switches are required to turn corresponding loads Off. Lights turn Off when sensor times out or with the switch.


Automatic Mode Operation:
 Sensor turns On both switches. Switches can be used to turn lights On or Off if daylight sensor is enabled and light level is above setpoint, switchpack connected to yellow lead will not turn Off.

Recommended Wire:
 18-3 AWG Stranded Wire non-shielded.

Coverage

OAC-DT-0501-R
 500 sq. ft.

OAC-DT-1000-R
 1,000 sq. ft.

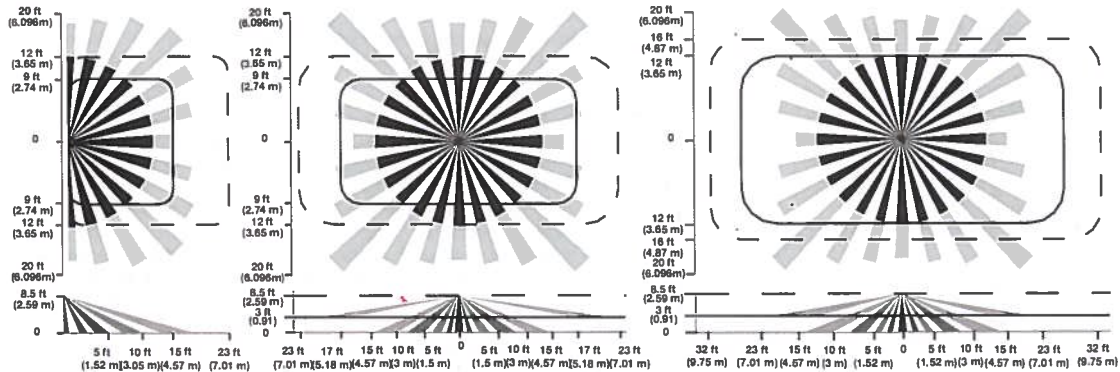OAC-DT-2000-R
 2,000 sq. ft.


Recommended Mounting Height: 8 to 12 ft

Minor Motion, IR

Major Motion, IR

Minor Motion, Ultrasonic

Major Motion, Ultrasonic

Maximum coverage area may vary somewhat according to room shape and the presence of obstacles.

The NEMA WD 7 Standard and robotic method were utilized to verify coverage patterns.

Controls

DIP Switch Legend

DIP Switch	Time Delay	1	2	3	4	5	6	7	8	9	10	11	12
Auto*	Auto	Auto	Auto	Auto	Auto	Auto	Auto	Auto	Auto	Auto	Auto	Auto	Auto
5 Minutes	5 Minutes	5 Minutes	5 Minutes	5 Minutes	5 Minutes	5 Minutes	5 Minutes	5 Minutes	5 Minutes	5 Minutes	5 Minutes	5 Minutes	5 Minutes
15 Minutes	15 Minutes	15 Minutes	15 Minutes	15 Minutes	15 Minutes	15 Minutes	15 Minutes	15 Minutes	15 Minutes	15 Minutes	15 Minutes	15 Minutes	15 Minutes
30 Minutes	30 Minutes	30 Minutes	30 Minutes	30 Minutes	30 Minutes	30 Minutes	30 Minutes	30 Minutes	30 Minutes	30 Minutes	30 Minutes	30 Minutes	30 Minutes

*Self-Adjusts to 10 min. user mode

Default =

Daylight Sensor Adjustment

Ultrasonic Sensitivity Adjustment

PIR Detector

PIR Detector

www.coopercontrols.com

 203 Cooper Circle, Peachtree City, GA 30269
 P: 800-553-3879 F: 800-951-7016

ACC120009

Cooper Controls, Greengate, Novell, Yes Box, PG Lighting Control Systems, Vision Touch, VisionSwitch, MicroSet, Digital, ControlCenter, LightKeeper, Flexo, Inno, TracSwitch, InnoRelay are valuable trademarks of Cooper Industries in the U.S. and other countries. You are not permitted to use Cooper Trademarks without the prior written consent of Cooper Industries.

COOPER Controls

Date Submitted: Sept. 2, 2015

Distributor: C.E.D. Columbus, Oh 43207

Contractor: Vaughn Industries

Job Name: OSU NRD Building B

Submitted by Spectrum Lighting, Inc.


Job Name:
OSU - NRD BUILDINGS

Catalog Number:
SP20-MV

Notes:

Type:

SPEC14-5147



SP15 & SP20, Heavy Duty Switchpacks



- Replaces separate transformers and relays
- Zero-crossing circuit provides increased durability, especially with today's high inrush loads
- Capable of switching up to 20 Amps
- Suitable for Plenum use
- Rated for Ballast, Tungsten and Motor Loads

Specifications:

Electrical Ratings:

Input: (120/277 VAC-SP20-MV) (347 VAC- SP15-347) (220-240 VAC- SP20-240), 50/60 Hz operation. Contacts are isolated and may be used to control low voltage circuits.

Output: 15 VDC 125 mA to operate up to five Greengate sensors.

Control: Connecting the 22 AWG red and blue control leads to each other will close the relay contacts.

Ballast Compatibility: Compatible with magnetic and electronic ballasts.

NOTE: The life of some compact fluorescent lamps (CFLs) is shortened by frequent automatic or manual switching. Check with the CFL and ballast manufacturer to determine effects of cycling.

Operating Environment:

- Temperature: 32°F to 104°F (0°C to 40°C)
- Relative humidity: less than 95%, non-condensing
- For indoor use only

Housing: Medium impact injection molded housing. ABS resin complies with UL 94V0. Plenum rated for external junction box mounting, with Teflon coated leads.

Motor Load: 1 HP 120-240 VAC; 2 HP 250 VAC

Size: 2 15/16" x 2 7/16" x 1 11/16"

Warranty: Five year

UL, CSA listed

www.coopercontrol.com

Catalog #	Type
Project	
Comments	
Prepared by	Date

Can be easily mounted on or in a 4sq. junction box, via 1/2" in nipple

Reduces installation expense



Available for 120, 220, 240, 277 & 347 VAC operation

Overview

Switchpacks provide 15 VDC operating voltage to all low voltage, 15 VDC, occupancy sensors and daylighting controllers. A single switchpack can provide power for up to five sensors. Up to ten switchpacks can be connected to one sensor for control of multiple circuits. Isolated contacts may also be used to control HVAC, contactors, motors, etc.

Operation

The switchpack has two main components; a transformer and a high current relay. The transformer has a primary high voltage input and a low voltage output. The low voltage output, 15 VDC provides operating power to low voltage occupancy sensors manufactured by Cooper Controls. When a occupancy sensor detects motion, it electrically closes an internal circuit which pulls up the control signal between the sensor and the switchpack signaling the switchpack to close it's high current relay resulting in the lights being turned ON.

Application

The switchpack is designed to work with low voltage sensors which require switchpacks. It cannot be used with sensors designed for use with any other low voltage relay systems. Consult sensor spec sheets for other sensor/relay combinations.

Ordering

Catalog #	Rated	Ballast	Tungsten	Motor (HP)	Output
SP20-MV	120/277 VAC	20A	15A, 120V	1HP-120V, 2HP-250V	15 VDC, 125mA
SP15-347	347 VAC	15A	NR	NR	15 VDC, 125mA
SP20-240	220-240 VAC	20A	NR	NR	15 VDC, 125mA

203 Cooper Circle
Peachtree City, GA 30269

P: 800-553-3879
F: 800-954-7016

Occupancy Sensors - Switchpacks

Contractor: Vaughn Industries

Job Name: OSU NRD Building B

Submitted by Spectrum Lighting, Inc.



Job Name:
OSU - NRD BUILDINGS

Catalog Number:
SP20-MV

Notes:


Type:

SPEC14-5147


Wiring Diagrams

SP15 & SP20, Heavy Duty Switchpacks


A/B Switching

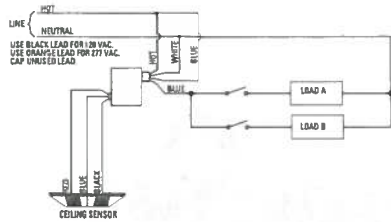


Three Way Switching

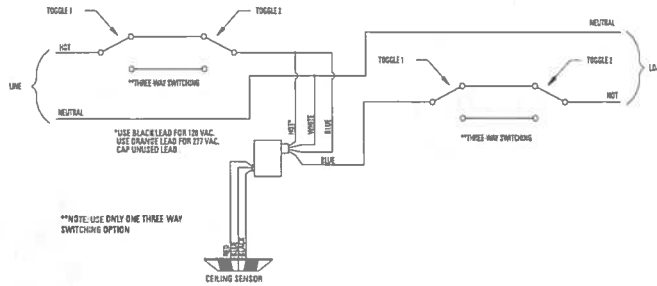


Standard Configuration

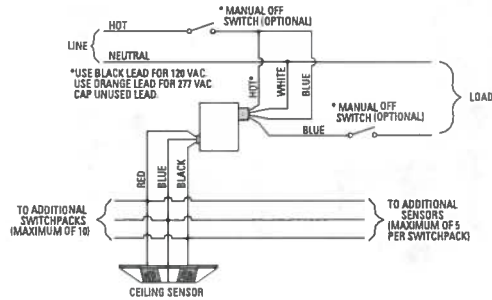


2 Circuits, 1 Sensor

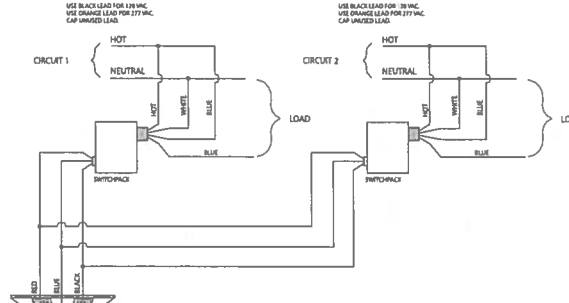

1 Circuit, 2 or more sensors

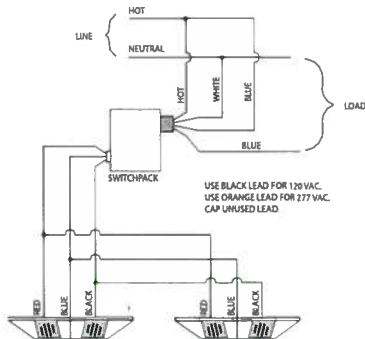


SP20-MV Schematic

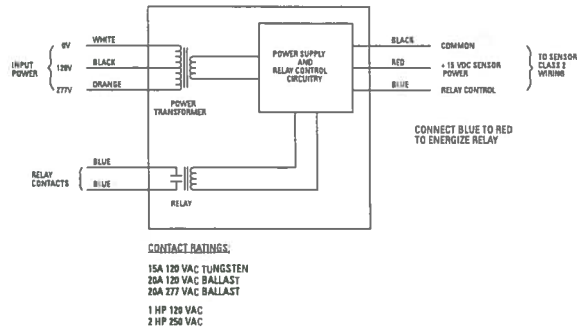

CONTACT RATINGS:

15A 120 VAC TUNGSTEN
20A 120 VAC BALLAST
20A 277 VAC BALLAST
1 HP 120 VAC
2 HP 250 VAC

Mounting



All connections are made via pigtails with twist-on wire connectors.

NOTE: Connect either the orange or black supply lead to the power source depending upon the power requirements. Cap the unused lead.

www.coopercontrols.com
203 Cooper Circle, Peachtree City, GA 30269
P: 800-553-3879 F: 800-954-7016

ACC080177

Cooper Controls, GreenGate, Novus, Yoti Box, POI Lighting Control Systems, VisionTouch, VisionSwitch, MicroSet, Delta, ControlKeeper, LiteKeeper, DMX Keeper, AnalogKeeper, TrackKeeper, InstaRelay are valuable trademarks of Cooper Industries in the U.S. and other countries. You are not permitted to use Cooper Trademarks without the prior written consent of Cooper Industries.

COOPER Controls

Date Submitted: Sept. 2, 2015

Distributor: C.E.D. Columbus, Oh 43207

Contractor: Vaughn Industries
Submitted by Spectrum Lighting, Inc.

Job Name: OSU NRD Building B



Job Name:
OSU - NRD BUILDINGS A, D & J

Catalog Number:
CEPC-1

Type:

Notes:

SPEC14-5147



CEPC, Cooper Emergency Power Control

- Eliminates energy waste by allowing emergency lighting to be switched
- Fail safe operation
- Visible emergency power LED
- Visible regular power LED
- Integral test switch
- Automatic Diagnostic Test Feature – 2.5 second emergency test when load is turned off (CEPC-1 only)
- Senses local circuit power loss
- UL 924 listed, meets NEC, OSHA and NFPA safety codes

Specifications:

Connections:

- Normal Power Sensing: 120V or 277V
- Emergency Power: 120V or 277V
- Normal Power Switching: 120V or 277V

Load Ratings:

- 20A Ballast Load Rating
- 1800W Incandescent Load Rating at 120V
- 1500W Incandescent Load Rating at 277V (CEPC-1 only)

Size:

- CEPC -1 Body Size: 2.875"H x 1.75"W x 1.75"D
- Flushmount Size: 4.75"H x 2.75"W x 0.25"D
- CEPC-D-F-S*: 6"H x 6"W x 2.25"D

Mounting:

- CEPC-1 mounts to a 4.688" junction box with single gang plaster ring
- UL 94-5VA Rated Plastic

Color: CEPC-1 = White, CEPC-D-F-S* = Black

Operating Environment:

- Temperature: 32°F - 140°F (0°C - 60°C)
- For indoor use only

Compatibility:

CEPC-1: Greengate LiteKeeper, ControlKeeper Relay Panels and Occupancy Sensors
CEPC-D-F-S*: Greengate ControlKeeper 4A

UL Approved
UL 924 Listed




www.coopercontrol.com

ACC131648

Catalog #	Type
Project	
Comments	
Prepared by	Date



CEPC-1



CEPC-D-F-S-120

Overview

The Cooper Controls Emergency Power Control (CEPC) device allows the control of emergency lighting by any Greengate lighting control panel or occupancy sensor.

Description/Operation

The CEPC senses a local, single normal power circuit. As long as normal power is present, the CEPC permits normal and emergency switching of the lighting load from Greengate lighting control panels or occupancy sensors. If normal power is lost for any reason, the CEPC will force the connected emergency fixtures ON.

The CEPC can be wired as either a control device along with a relay panel and occupancy sensor, or as a shunt to bypass line voltage devices when normal power fails. The CEPC-D-F-S is a universally compatible device that allows control of 4-wire emergency dimming loads. When normal power is lost, the CEPC-D-F-S will force the emergency fixtures to the full bright condition. Both CEPC models include a test switch feature for verifying proper functionality. In addition, the CEPC-1 model also provides an automatic test feature. Under normal operation, when the controlled load is turned OFF, the emergency lighting will remain ON an additional 2.5 seconds, providing safety and convenience while leaving the area and eliminating the need of special equipment to test the emergency control of the device.

Installation

The CEPC can be installed down line of a Greengate lighting control panel or Occupancy Sensor and Switchpack. The CEPC should be located next to the emergency fixture it is controlling.

Ordering

This is an accessory for Greengate Lighting Control Panels and Greengate Occupancy Sensors. When ordering, specify the CEPC as a separate accessory.

Catalog #	Description	Rating
CEPC-1	Emergency Power Control 120V or 277V	120V or 277V
CEPC-D-F-S-120	0-10V Load Emergency Power Control 120V	120V
CEPC-D-F-S-277	0-10V Load Emergency Power Control 277V	277V

203 Cooper Circle
Peachtree City, GA 30269

P: 800-553-3879
F: 800-954-7016

COOPER Controls

Date Submitted: Sept. 2, 2015

Distributor: C.E.D. Columbus, Oh 43207

Contractor: Vaughn Industries

Job Name: OSU NRD Building B

Submitted by Spectrum Lighting, Inc.



Job Name:
 OSU - NRD BUILDINGS A, D & J

Catalog Number:
 CEPC-1


Notes:

Type:


SPEC14-5147

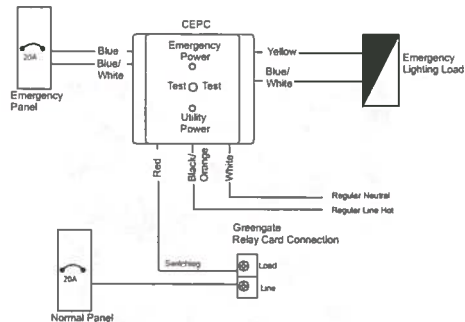Wiring Diagrams**CEPC, Cooper Emergency Power Control****Wiring Diagram for 2-Wire Non-Dimming Loads (w/Relay Panel)**

2-Wire Non-Dimmed		
CEPC Wire#	Description	iLumin Connection
Blue	Emergency Hot	
Yellow	Emergency Switchleg	
Blue/White	Emergency Neutral	
Black/Orange	Regular Hot (Sensing)	Transformer Power
Red	Switchleg	Relay Load Terminal Block
White	Regular Neutral	Transformer Neutral Wire

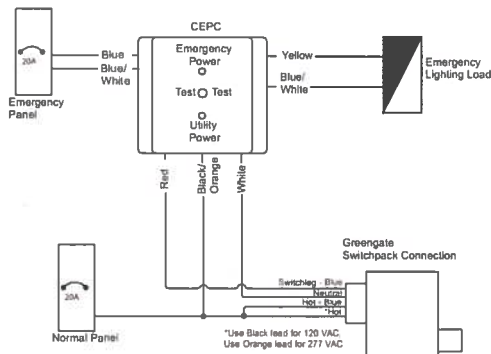Wiring Diagram for 2-Wire Non-Dimming Loads (w/Switchpack)

2-Wire Non-Dimmed		
CEPC Wire#	Description	Greengate Switchpack Connection
Blue	Emergency Hot	
Yellow	Emergency Switchleg	
Blue/White	Emergency Neutral	
Black/Orange	Regular Hot (Sensing)	Regular Hot
Red	Switchleg	Switchpack Load Terminal Block
White	Regular Neutral	Regular Neutral

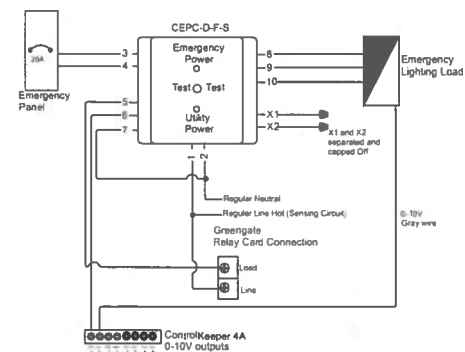Wiring Diagram for 4-Wire Dimming Loads (w/CK4A)

4-Wire Dimming		
CEPC-D-F-S Wire#	Description	Greengate Connection
1	Regular Hot	Constant Hot and Relay Line
2	Regular Neutral	
3	Emergency Hot	
4	Emergency Neutral	
5	Switched Hot	Relay Load
6	Violet Hot (0-10V +)	CK4A Violet Terminal
7	Regular Neutral	
8	To Load Hot	
9	To Load Violet (0-10V +)	
10	To Load Neutral	
X1	Cut and Cap Off	
X2	Cut and Cap Off	

www.coopercontrol.com

 203 Cooper Circle, Peachtree City, GA 30269
 P: 800-953-3870 F: 800-954-7316

Cooper Controls, Greengate, Novitas, Yes Box, PO Lighting Control Systems, VisionTouch, VisionSwitch, MicroNet, Digital, ControlKeeper, LifeKeeper, TrackKeeper, IntelliRelay are valid trademarks of Cooper Industries in the U.S. and other countries. They are not permitted to use Cooper trademarks without the prior written consent of Cooper Industries.

Date Submitted: Sept. 2, 2015

Distributor: C.E.D. Columbus, Oh 43207

This foregoing document was electronically filed with the Public Utilities

Commission of Ohio Docketing Information System on

10/9/2018 2:19:17 PM

in

Case No(s). 18-1040-EL-EEC

Summary: Application The Ohio State University and Ohio Power Company for approval of a special arrangement agreement with a mercantile customer electronically filed by Mr. Steven T Nourse on behalf of Ohio Power Company