




Chipmunk Solar

Exhibit U



Erosion Control and Best Management Practices

Case No. 21-0960 EL BGN

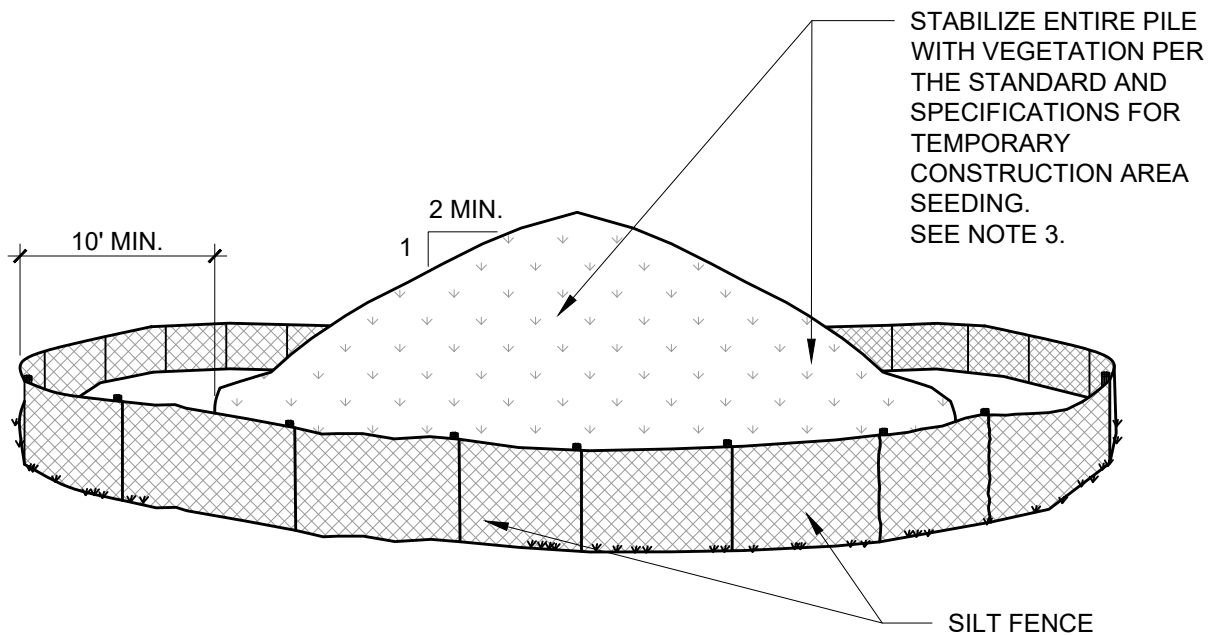

NOTES:



1. AREA CHOSEN FOR STOCKPILING OPERATIONS SHALL BE DRY, STABILIZED AND LOCATED AWAY FROM KNOWN WORK AREAS TO PREVENT RELOCATION.
2. MAXIMUM STOCKPILE HEIGHT SHALL BE 12 FEET.
3. EACH PILE SHALL BE SURROUNDED WITH SILT FENCING, INSTALLED PER SILT FENCE DETAIL, THEN STABILIZED IN ACCORDANCE WITH THE OHIO DEPARTMENT OF TRANSPORTATION STANDARD AND SPECIFICATIONS FOR TEMPORARY CONSTRUCTION AREA SEEDING WITHIN 7 DAYS OF COMPLETION.
4. A PERIMETER DIKE/SWALE SHALL BE LOCATED UP-SLOPE OF THE TOPSOIL STOCKPILE TO DIVERT STORMWATER AROUND THE STOCKPILE.

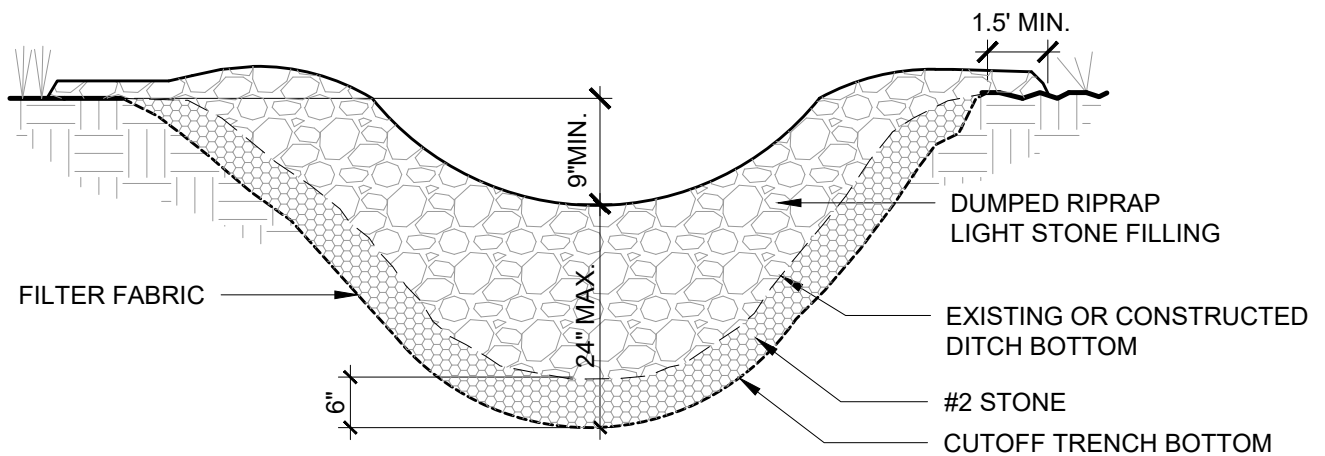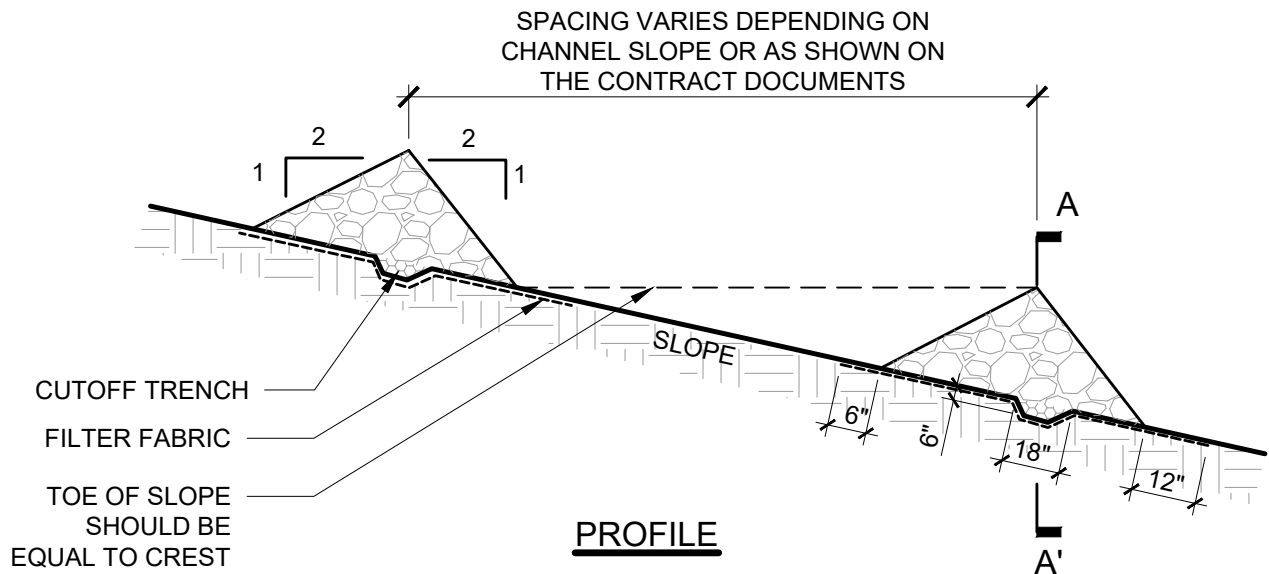

SECTION A-A'


NOTES:

1. STONE SHALL BE PLACED ON A FILTER FABRIC FOUNDATION TO THE LINES, GRADES AND LOCATIONS SHOWN IN THE PLAN.
2. EXTEND THE STONE A MINIMUM OF 1.5 FEET BEYOND THE DITCH BANKS TO PREVENT STORMWATER FROM FLOWING AROUND THE CHECK DAM.
3. ENSURE THAT CHANNEL APPURTENANCES SUCH AS CULVERT ENTRANCES BELOW CHECK DAMS ARE NOT SUBJECT TO DAMAGE OR BLOCKAGE FROM DISPLACED STONE.
4. MAXIMUM DRAINAGE AREA 2 ACRES.

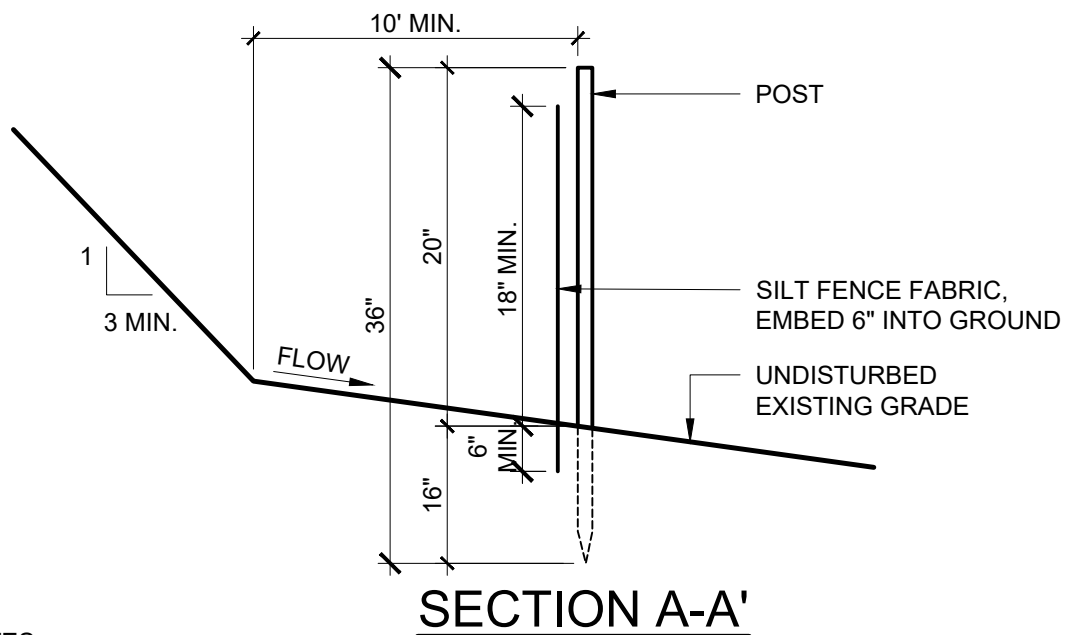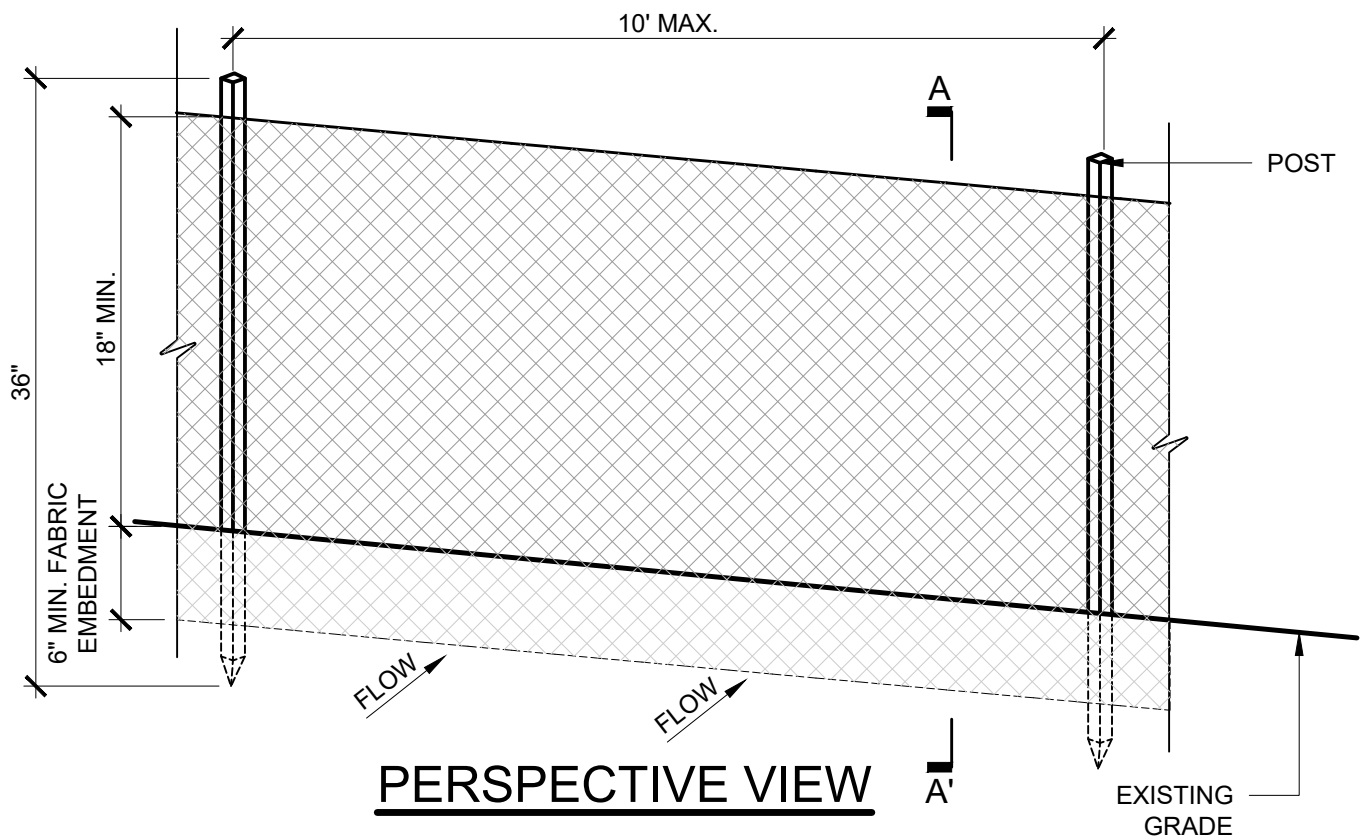

NOTES:


1. WHEN TWO SECTIONS OF SILT FENCE FABRIC ADJOIN EACH OTHER THEY SHALL BE OVERLAPPED BY 6" AND FOLDED. FILTER CLOTH SHALL BE EITHER FILTER X, MIRAFL 100X, STABLINKA T140N, OR APPROVED EQUAL.
2. PREFABRICATED UNITS SHALL MEET THE MINIMUM REQUIREMENTS SHOWN.
3. MAINTENANCE SHALL BE PERFORMED IMMEDIATELY AND MATERIAL REMOVED WHEN "BULGES" DEVELOP IN THE SILT FENCE.

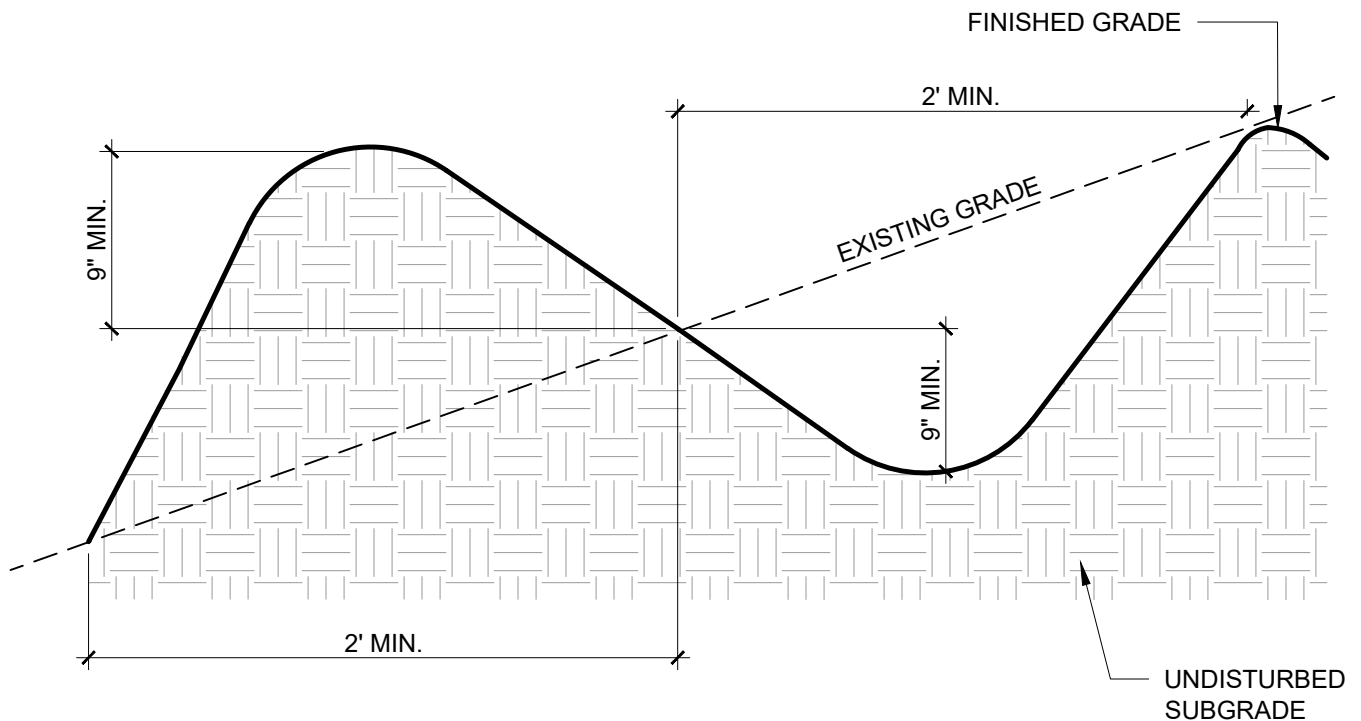


CROSS SECTION

NOTES:


1. ALL PERIMETER DIKE/SWALE SHALL HAVE UNINTERRUPTED POSITIVE DOWNWARD SLOPE TO A STABILIZED OUTLET.
2. DIVERTED RUNOFF FROM DISTURBED AREAS SHALL BE CONVEYED TO AN APPROVED SEDIMENT TRAPPING DEVICE.
3. DIVERTED RUNOFF FROM AN UNDISTURBED AREA SHALL OUTLET INTO AN UNDISTURBED STABILIZED AREA AT A NON-EROSIVE VELOCITY.
4. THE SWALE SHALL BE EXCAVATED OR SHAPED TO LINE GRADE, AND CROSS SECTION AS REQUIRED TO MEET THE CRITERIA SPECIFIED IN THE STANDARD AND SPECIFICATIONS FOR PERIMETER DIKE/SWALE.
5. STABILIZATION OF THE AREA DISTURBED BY THE DIKE/SWALE SHALL BE INSTALLED IN ACCORDANCE WITH THE STANDARD AND SPECIFICATIONS FOR TEMPORARY CONSTRUCTION AREA SEEDING LOCATED ON PAGE 13 OF THE OHIO DEPARTMENT OF TRANSPORTATION HANDBOOK FOR SEDIMENT AND EROSION CONTROL.
6. PERIODIC INSPECTION AND REQUIRED MAINTENANCE MUST BE PROVIDED AFTER EACH RAIN EVENT AND/OR SWPPP INSPECTION.
7. MAX DRAINAGE AREA LIMIT: 2 ACRES.

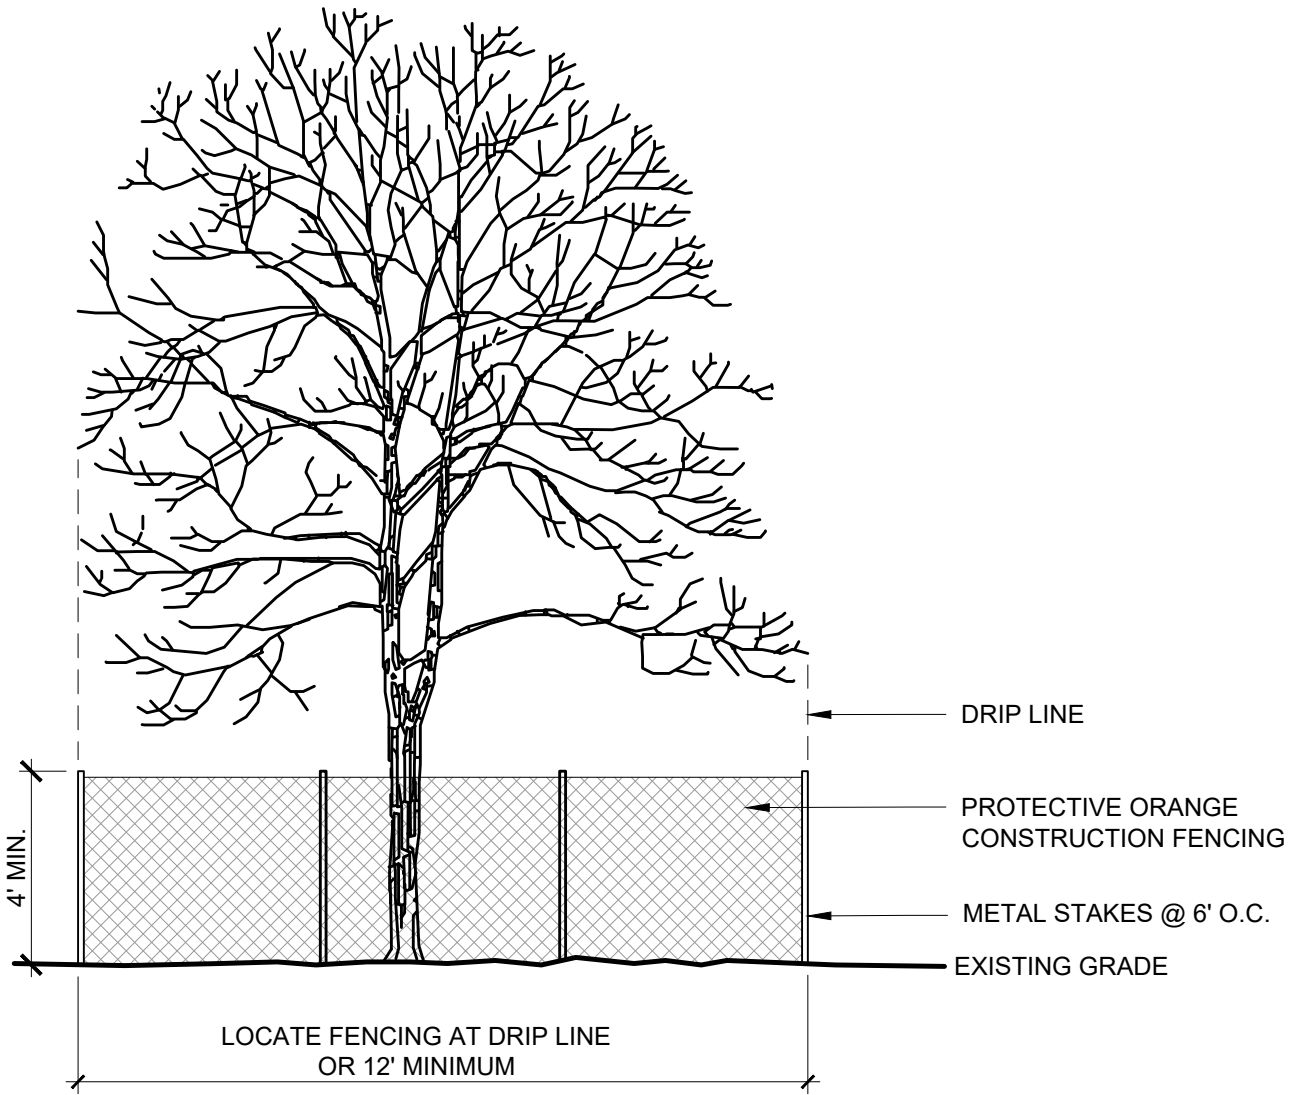




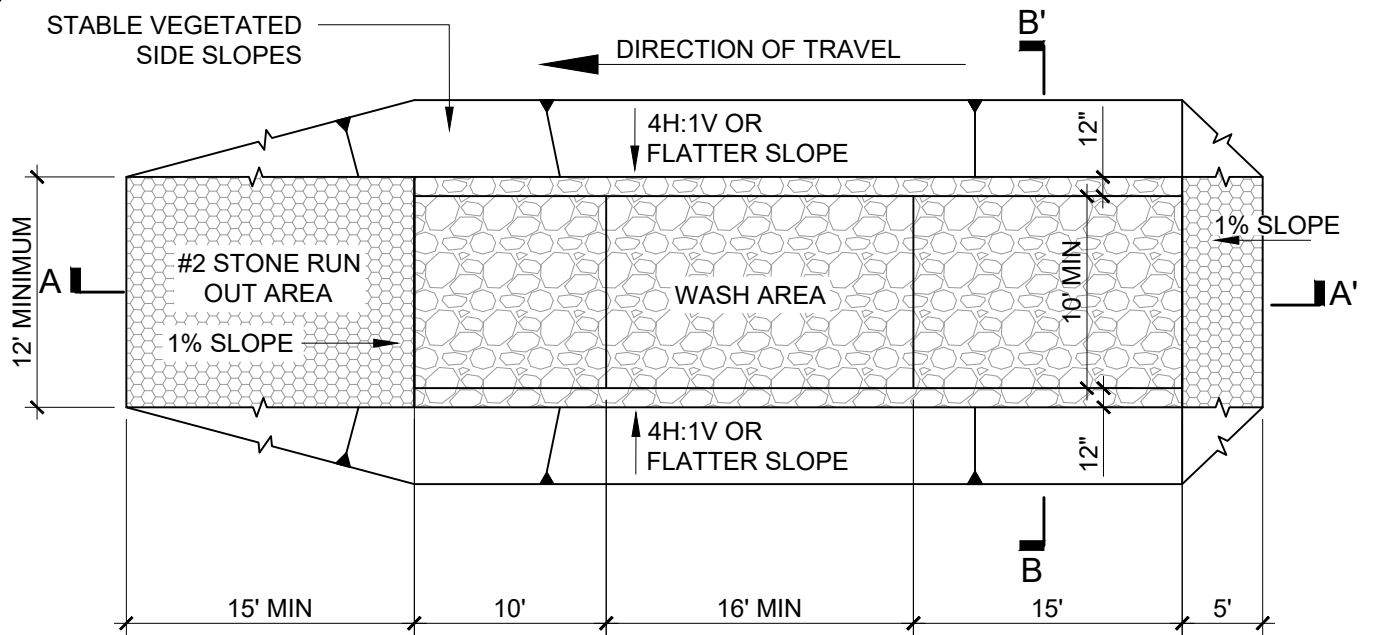

PLAN

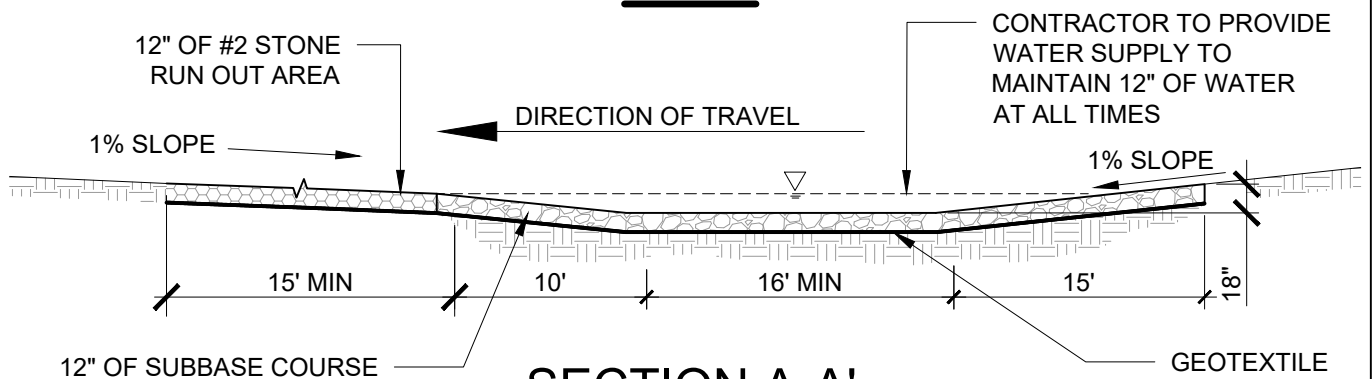



SECTION A-A'

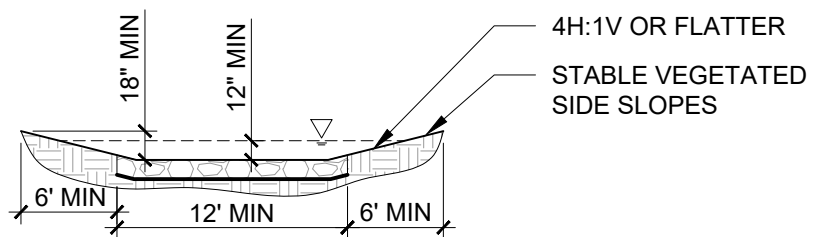

SECTION B-B'

NOTES:

1. THE WHEEL WASH SHALL BE CONSTRUCTED AND STABILIZED (INCLUDING VEGETATION) PRIOR TO THE COMMENCEMENT OF CONSTRUCTION.
2. CONTRACTOR SHALL REMOVE ACCUMULATED SEDIMENT FROM WHEEL WASH ON A DAILY BASIS. MORE FREQUENT REMOVAL MAY BE NECESSARY BASED ON USE AND SITE CONDITIONS.
3. WASH WATER SHALL BE DISCHARGED TO AN APPROVED SEDIMENT TRAP.

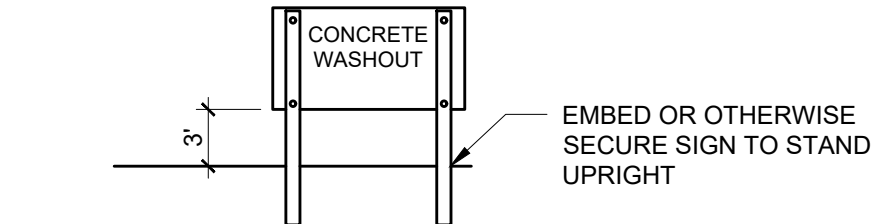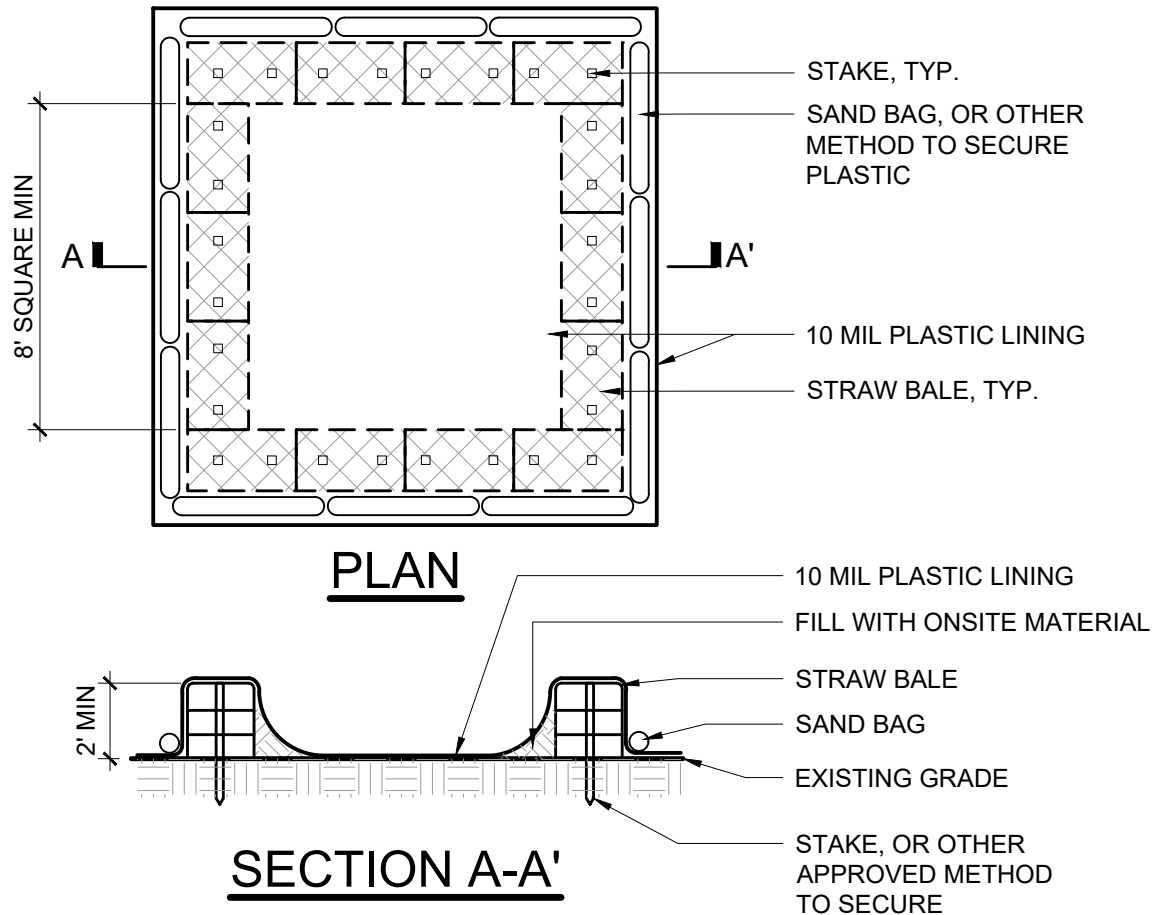

CONCRETE WASHOUT SIGN

NOTES:

1. THE CONTRACTOR SHALL BE RESPONSIBLE FOR SIZING, CONSTRUCTION, AND INTEGRITY OF THE WASHOUT. THE CAPACITY OF THE WASHOUT SHALL BE 60 GALLONS PER TRUCK TO BE CLEANED WITHIN THE EXPECTED MAINTENANCE FREQUENCY. ADDITIONAL CAPACITY SHALL BE PROVIDED TO ACCOMMODATE RAINFALL.
2. OTHER METHODS OF CONCRETE WASHOUT CONTAINMENT MAY BE UTILIZED IF APPROVED BY THE OWNER'S REPRESENTATIVE.
3. LOCATE WASHOUT AREA AT LEAST 100' FROM STORM DRAINS, OPEN DITCHES, OR WATER BODIES.
4. THE PLASTIC LINING SHALL BE MAINTAINED IN A WATER TIGHT CONDITION AND SHALL BE REPLACED AT EVERY CLEANING.
5. DO NOT ALLOW RUNOFF TO ENTER THIS AREA.
6. THE CONCRETE WASHOUT SIGN SHALL BE PLACED WITHIN 30 FEET OF THE TEMPORARY CONCRETE WASHOUT FACILITY.

**This foregoing document was electronically filed with the Public Utilities
Commission of Ohio Docketing Information System on**

3/2/2022 6:58:49 PM

in

Case No(s). 21-0960-EL-BGN

Summary: Application Exhibit U (Erosion Control) electronically filed by Mr. Michael J. Settineri on behalf of Chipmunk Solar LLC